




Scan this QR code for
product information, videos,
and assembly assistance.

Full Motion Dual Monitor Desk Mount

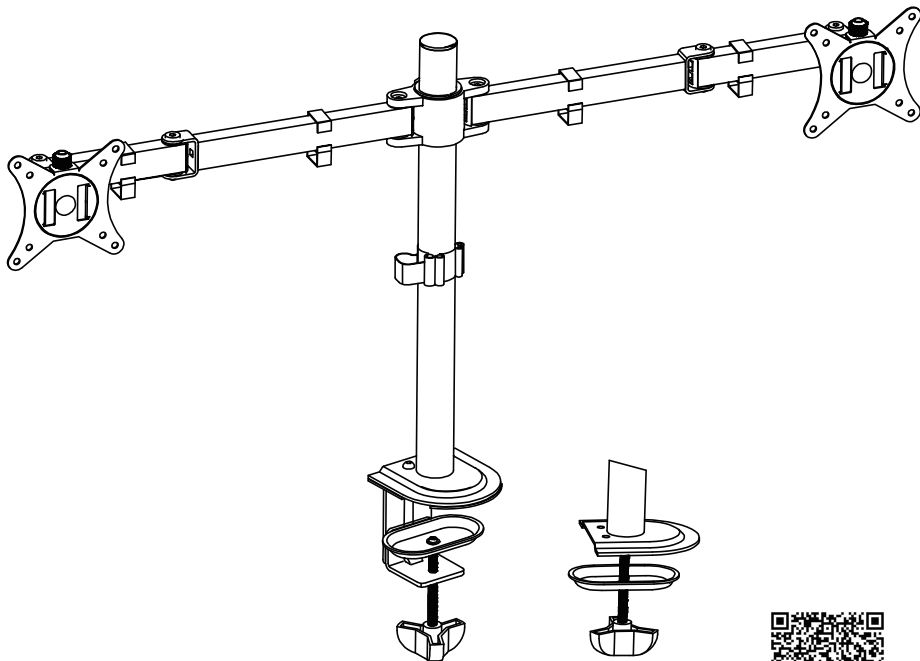

HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com



(855) 925-5668



www.mount-it.com

EN Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact your distributor.

CAUTION: Use with products heavier than the rated weights indicated may result in instability causing possible injury.

- Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. The product should be used by one person only.
- This product is designed to be installed on solid concrete walls, masonry walls or wood stud walls.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and **DO NOT OVERTIGHTEN** the screws.
- This product contains small parts that could be a choking hazard if swallowed. Keep these items away from children.
- Do not use the product for other uses. Using this product other than as intended could lead to product failure.

IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact MountIt! for a replacement.

MAINTENANCE: Check that the product is secure and safe to use at regular intervals (at least every three months).

Lesen Sie die gesamte Bedienungsanleitung, bevor Sie mit der Installation und Montage beginnen. Wenn Sie Fragen zur Anleitung oder Warnungen haben, wenden Sie sich bitte an Ihren örtlichen Händler.

- Die Installation sollte von einem qualifizierten Elektriker, der schwächer als die angegebenen Nennleistungen sind, kann zu Installations- Fehlen und zu möglichen Verletzungen führen.
- Stiles befolgt Sie die folgenden Sicherheitsregeln: Eine ungeschultes Installation kann zu Schäden oder schweren Verletzungen führen.
- Die Installation sollte nur von einem qualifizierten Elektriker vorgenommen werden. Es ist nicht zulässig, die Installation nur von Fachleuten durchführen zu lassen.
- Dieses Produkt ist auf massiven Betonwänden oder Mauerwerkswänden zu montieren.
- Stellen Sie sicher, dass die Aufhängung des Gewichtsmess des Geräts und aller angeschlossenen Wannen und Komponenten sicher ist.
- Verwenden Sie die mitgelieferten Befestigungsmittel und die Befestigungsschrauben und die Befestigungsschrauben und die Befestigungsschrauben.
- Dieses Produkt enthält Korkleiste, die beim Verschieben eine Erstickungsgefahr darstellen können. Halten Sie diese Gegenstände von Kindern fern.
- Die Installation sollte nur von einem qualifizierten Elektriker vorgenommen werden. Es ist nicht zulässig, die Installation nur von Fachleuten durchführen zu lassen.

WICHTIG: Stellen Sie vor der Installation sicher, dass Sie alle Teile gemäß der Komponenten-Checkliste erhalten haben. Bei beschädigten oder fehlenden Teilen, wenden Sie sich an Ihren Verkäufer, um Ersatz zu erhalten.

WARNUNG: Überprüfen Sie die Installation regelmäßig auf Sicherheit und Stabilität (am besten alle drei Monate).

FR Lire attentivement le guide d'utilisation avant d'employer cette installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, contactez votre fournisseur ou votre revendeur pour une assistance.

ATTENTION: Les produits de cette marque ne sont pas conçus pour être installés dans une installation capable de résister aux blessures potentielles.

Les supports doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures au personnel.

- Un équipement de sécurité et les outils appropriés doivent être utilisés. Ce produit devrait être installé uniquement par des professionnels.
- Les produits de cette marque ne sont pas conçus pour être installés dans une installation capable de résister aux blessures potentielles.
- Assurez-vous que les surfaces de soutien assurent un support sûr et stable de l'équipement et de tous les matériaux et composants associés.
- Les produits de cette marque ne sont pas conçus pour être installés dans une installation capable de résister aux blessures potentielles.
- Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Éloignez ces pièces des enfants.
- Les produits de cette marque ne sont pas conçus pour être installés dans une installation capable de résister aux blessures potentielles.

Personnel:

Avant l'installation, assurez-vous que vous avez reçu toutes les pièces et les plans de la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre fournisseur local pour qu'il la remplace.

Après l'installation, assurez-vous que vous avez reçu toutes les pièces et les plans de la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre fournisseur local pour qu'il la remplace.

[illegible][illegible]

Use uma lista de múltiplas entradas para registrar a instalação e manutenção. Se você tiver alguma dúvida sobre qualquer uma das instruções ou o prazo, por favor, entre em contato com seu distribuidor local para assistência.

ATENÇÃO: Use com cuidado estas pedras de cor se pesos indicados pelo peso em instabilidade, causando possíveis danos.

Os suportes devem ser anexados corretamente às ranhuras de manuseio. A instalação incorreta pode causar danos às suas pedras decorativas.

As pedras decorativas adquiridas e instaladas incorretamente devem ser substituídas imediatamente.

Este produto é projetado para ser instalado em janelas verticais de paredes de madeira, paredes de concreto sólido ou de tijolos.

Certifique-se que a superfície de apoio suportará com segurança o peso combinado de todas as pedras e todas as ferramentas e componentes anexados.



Use o parafuso de segurança para garantir o uso adequado e seguro do produto.

Este produto contém pequenas peças que podem causar lesões se ingeridas. Mantenha sempre fora do alcance de crianças.

Se você estiver instalando este produto em sua internet, lembre-se de manter sempre a distância adequada entre as pedras decorativas.

IMPORTANTE: Asegure-se que você receba todas as peças de reposição com o prazo de validade de cada componente, antes de instalá-lo. Se alguma peça estiver faltando ou se o defeito ocorrer, contate o seu distribuidor local para substituição.

MANUTENÇÃO: Certifique-se de manter sempre a proteção para o uso em intervalos regulares (uma vez a cada três meses).



x2



CHOKING HAZARD. Package includes small parts.
Not for children under 3 years. Adult supervision is required.


Missing Parts? Call us at (855) 925-5668 and we will ship replacement parts free of charge.

[illegible]

Step 1

Connect the Base and Pole


- Attach the Base (#E) to the Pole (#G) using the Bolt (#J) through the recessed hole in the Base shown here. Ensure the larger bolt hole in the center is aligned with the center of the pole. Tighten bolt (#J) until secure.

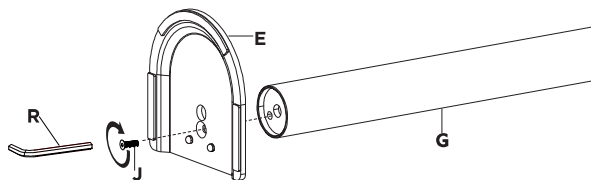

Step 2a


Clamp Mounting Option

- Install the Bolt (#L) through the remaining hole on the base. Tighten bolt (#L) until secure.

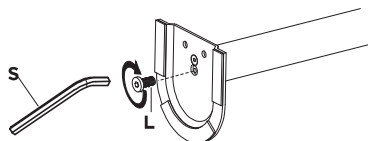


Attach the L-Bracket

- Connect the Clamp L-Bracket (#D) to the Pole Base as shown using Bolt (#K). Partially Install the 2 Bolts (#K) leaving a gap of approximately 0.2in (5mm) between the bracket and the base of the screw.

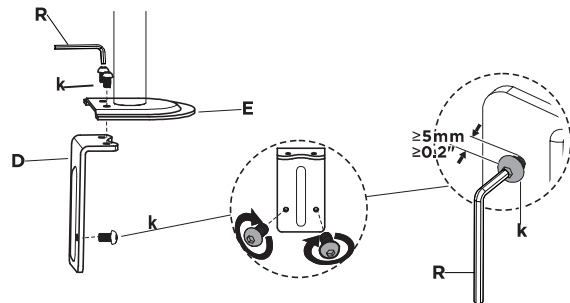


Option A: Desk Thickness 0.4"-1.8"

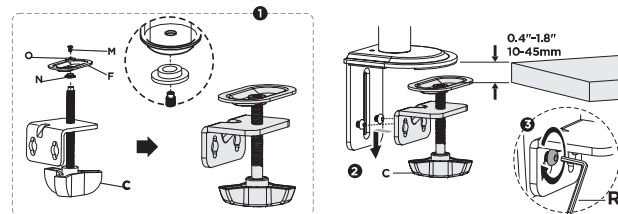


- For desks with a thickness of 0.4"-1.8" attach the Clamp Handle (#C) in the original orientation as shown so that the short end of the bracket faces down alongside the handle. Place the Lower Support Washer (#N) on the end of the clamp bolt, followed by the Oval Plate (#F) then the Upper Washer (#O) and secure it in place using the Bolt (#M).
- Place the Clamp Handle (#C) over the 2 bolts on the L-Bracket and slide it down so away from the mount so that the bolts rest in the short end of the channel. Tighten the bolts down until secure using Hex Wrench (#R).

Option B: Desk Thickness 1.8"-3.3"

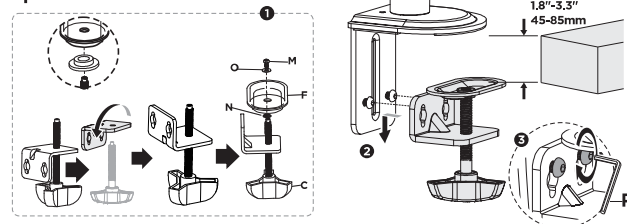

- For desks with a thickness of 1.8"-3.3" remove the hand knob from the bracket. Flip the bracket over and reinstall the hand knob in the opposite direction. The short end of the bracket will now face away from the handle. Place the Lower Support Washer (#N) on the end of the clamp bolt, followed by the Oval Plate (#F) then the Upper Washer (#O) and secure it in place using the Bolt (#M).
- Place the Clamp Handle (#C) over the 2 bolts on the L-Bracket and slide it down so away from the mount so that the bolts rest in the short end of the channel. Tighten the bolts down until secure using Hex Wrench (#R).

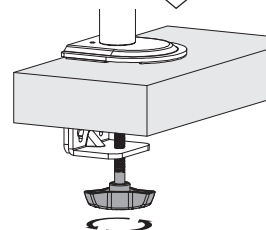


- Place the mount over the edge of the desk in the position desired and tighten the hand knob until the clamp is tight against the underside of the table.


Step 2b

Grommet Mounting Option


- To mount through a grommet hole, remove the Clamp Handle (#C), slide the Oval Plate (#F) directly over the grommet bolt as shown.

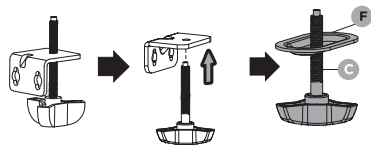

- If your desktop has an existing grommet hole between 0.4"-2.4" in diameter, with a desk thickness of 0.4"-1.6" then it is ready for installation.
- If no grommet hole exists in the desktop or not in the required location, then one will need to be drilled. Use a 3/8" (10mm) drill bit to drill a hole through your desktop. The desktop must be between 0.4"-1.6" thick.

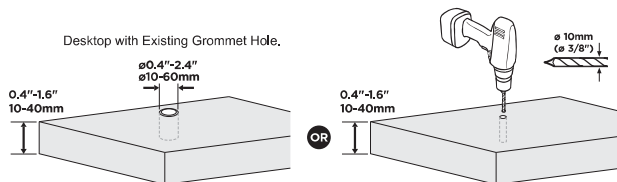


- Place the pole over the grommet hole and install the grommet handle through the underside of the desk then tighten the handle until the mount is secure.

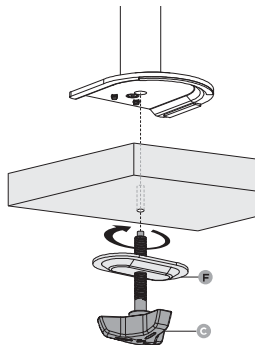


Step 3


Prepare the Monitor Arms

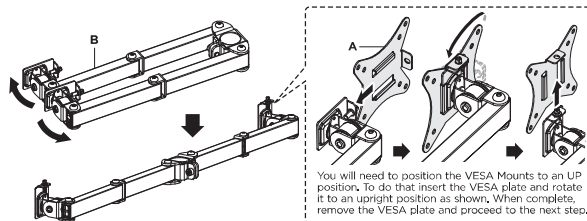

- Attach the Cable Clips (#I) to the arms then slide the Monitor Arms (#B) over the pole. Cable Clip (#H) can be attached to the vertical pole beneath the monitor arms.

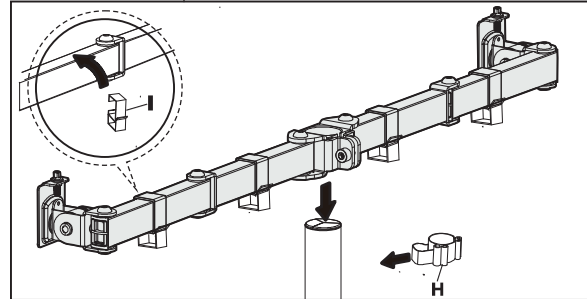


- Position the Monitor Arms at the desired height and tighten the bolt on the rear using 6mm Hex Wrench (#S) until secure.

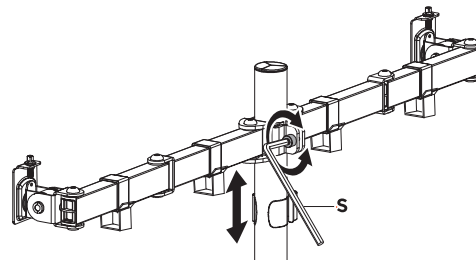

Step 4

Attach the VESA Mounts to the Monitors


- Select the appropriate size mounting bolt (Select one size #M-A, or #M-B) and washer (#M-C) for your display's mounting holes and verify the length of the VESA bolt is not too long. If you are unsure of the correct bolt size for your display, refer to your display's user manual or contact the display's manufacturer for sizing information. Attach the VESA Plates (#A) using the selected bolts and tighten until secure. Do not over tighten.

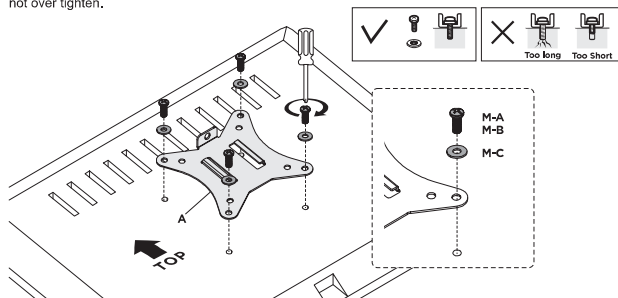

Step 5

Attach the Monitors to the Arms


- Slide the VESA plates onto the ends of the monitor arms. Hold the opposite arm when attaching the monitors to balance the mount.
- Install the Knob (#P) and Bolt (#Q) to the top of the bolt shown here to secure it in place.

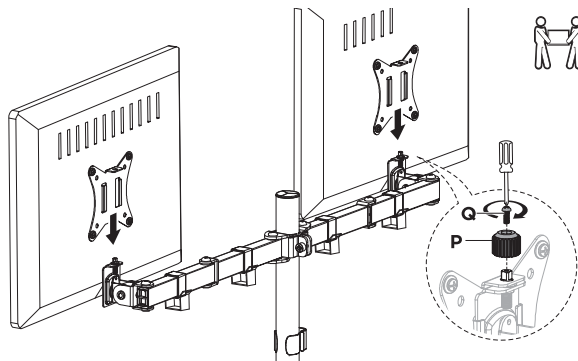

Step 6

Cable Management


- Route the cables through the cable management clips for a more organized desktop.

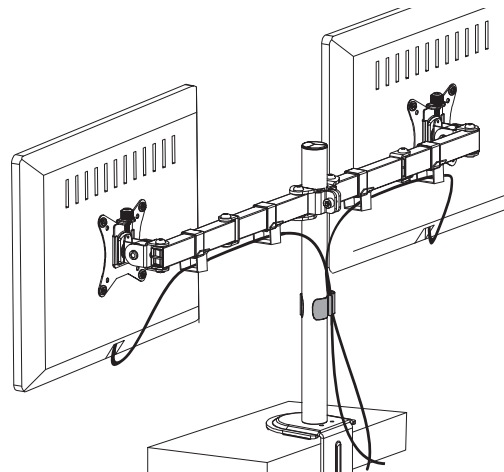

Step 7


Range of Motion

- Use within the range shown here for optimal viewing angles and stability.

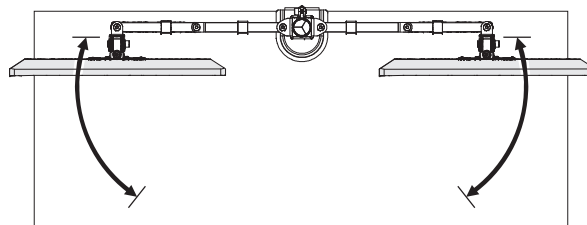

Step 8



Final Adjustments

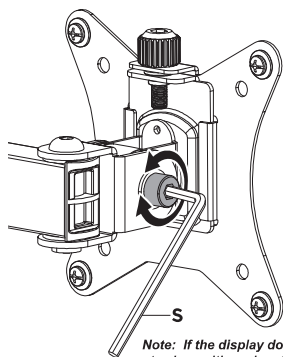



Note: If the display does not stay in position when tilted, or is too difficult to move, adjust the bolt shown here as needed.



• To level the height of the monitors, rotate the Knob (#P) clockwise to lower or counterclockwise to raise. If the Knob (#P) cannot be rotated by hand to raise the monitors, lift the monitor slightly with your other hand while rotating the knob. Knob (#P) can also be adjusted with a hex wrench (not provided) if needed.

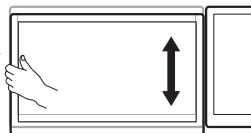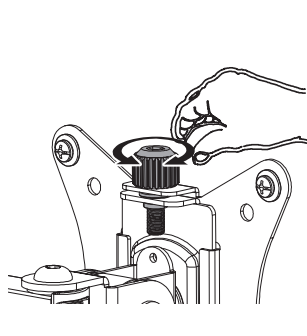

• The screens can be turned side to side and rotated to be used in portrait or landscape orientation. Store the Hex Wrenches (#R, #S) in the slots provided in Cable Clip (#I) for use when needed.

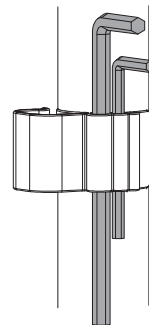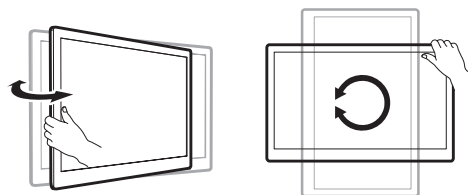

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.



support@mount-it.com

Available by phone **Monday - Friday from 5:00am to 5:00pm PST.**



(855) 925-5668

Chat live with an agent on our website!



www.mount-it.com