


MOUNT-IT!

Installation Manual

SKU: MI-3883B_G10

SKU: MI-3883W_G10

V2 11/24

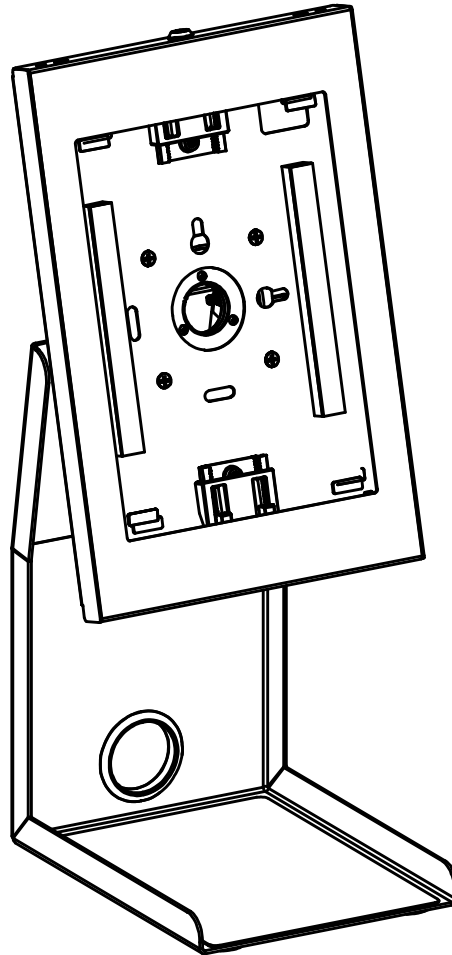

Scan this QR code for
product information, videos,
and assembly assistance.

ANTI-THEFT TABLET KIOSK WITH PRINTER SHELF



HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com



(855) 925-5668







www.mount-it.com

Step 1a

A. Wood Surface Installation Option

- To secure the stand base to a wood surface use a 5/32" bit and drill holes to a depth of 0.5" and secure the stand base using the Lag Screws (#K). Do not overtighten.





Note: Ensure the mounting surface is thick enough to accommodate the length of the Lag Screws.

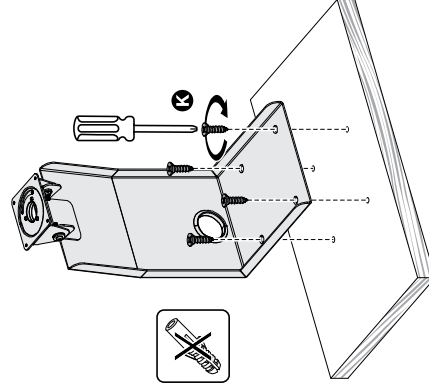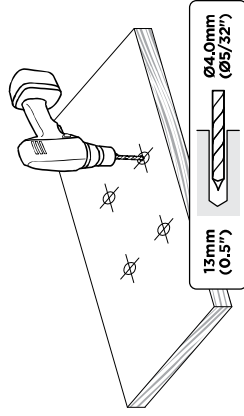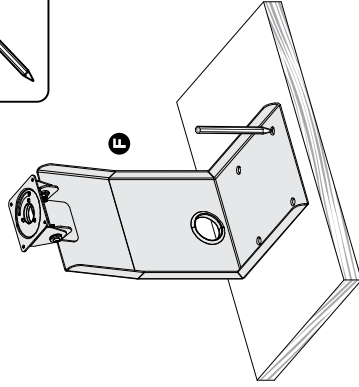

B. Concrete Surface Installation Option

- To secure the stand base to a concrete surface, use a 5/16" Bit and drill holes to a depth of 1.8". Clear any dust and debris from the holes and insert the Concrete Anchors (#M). Secure the stand base using the Lag Screws (#L). Do not overtighten.


Note: Ensure the mounting surface is thick enough to accommodate the length of the Lag Screws.

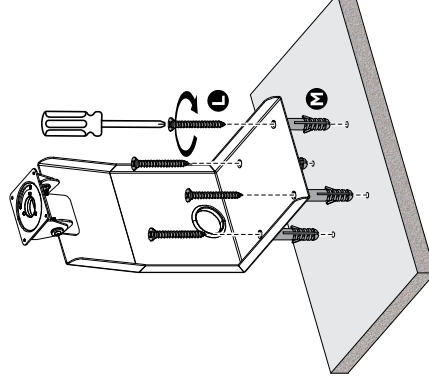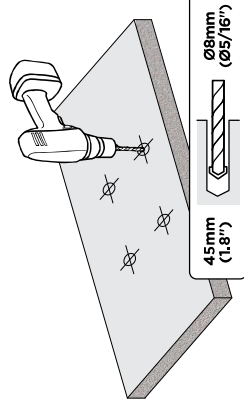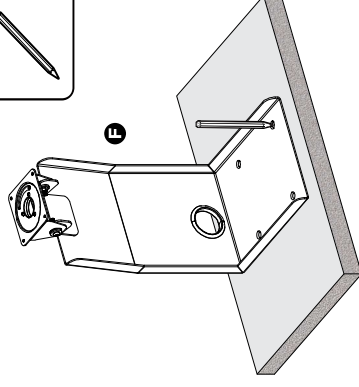

Step 1b

Standing Base Option


- Peel the backing off the Silicone Foot Pads (#H) and place them on the bottom, near each corner of the Standing Base (#F).

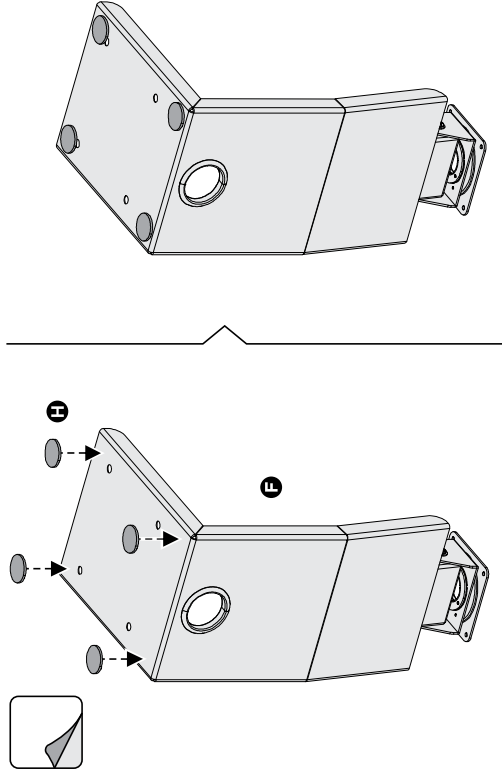

Step 2

Install the Silicone Pad


- Peel the backing off the Silicone Shelf Pad (#G) and place it onto the surface of the base shelf.

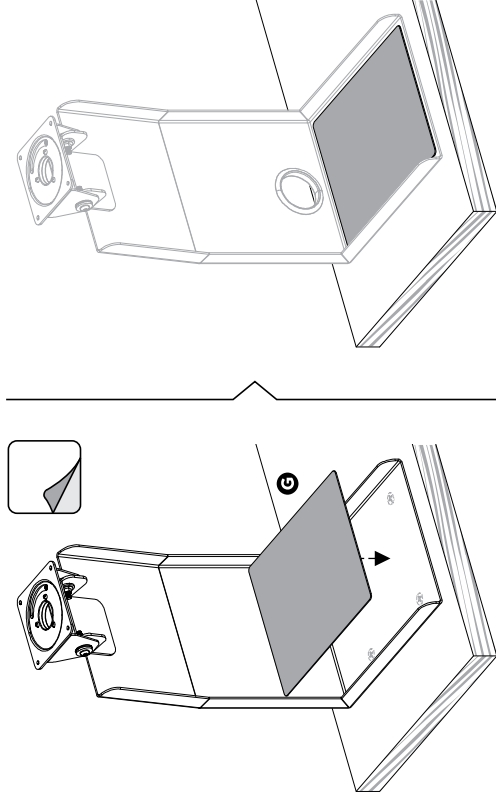

Step 3


Attach the Tablet Case to the Stand

- Attach the Tablet Case (#A) to the top of the stand using Bolts (#I) through the 4 bolt holes on the interior of the Case in the orientation shown here.

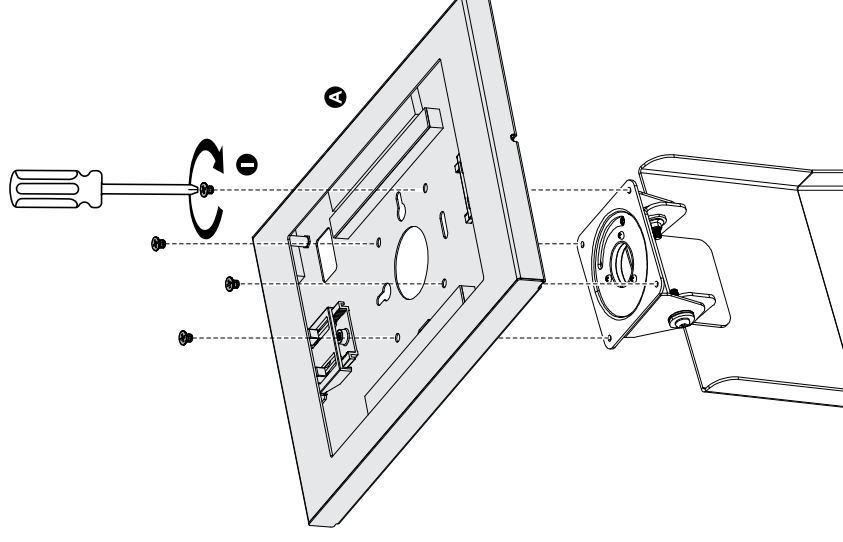

Step 4


Pull the Tablet Case into the Forward Position

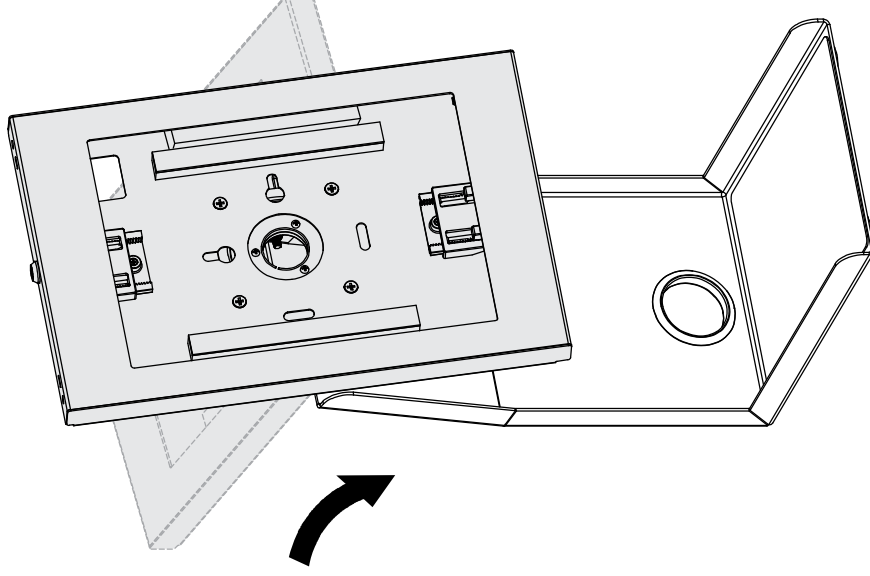

Step 5

Open the Tablet Case


• To open the Tablet Case (#A) insert the Key (#N) and turn counterclockwise to unlock (clockwise to lock.)

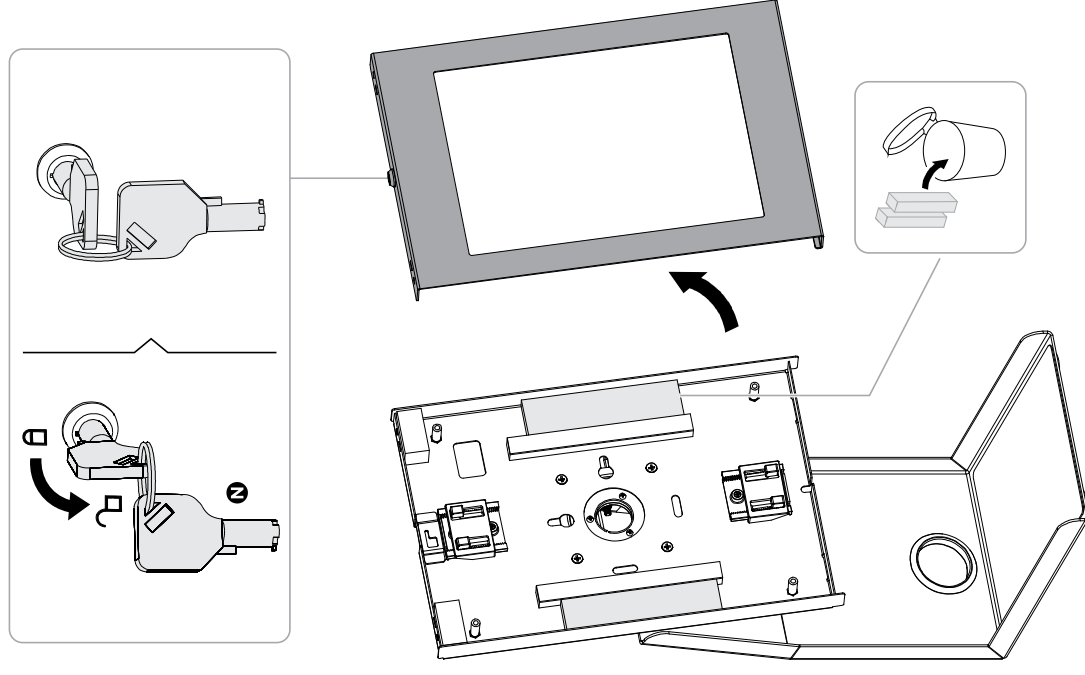

Step 6


Select the Tablet Adapter

- Select the Tablet Adapter (#B, C, D) for your tablet (see the table below for compatibility) and attach it over the tablet inside the case using the 4 Bolts (#J). Before fully tightening the bolts, center the tablet in the adapter if needed by squeezing the tabs on the clamps and adjusting them left or right.

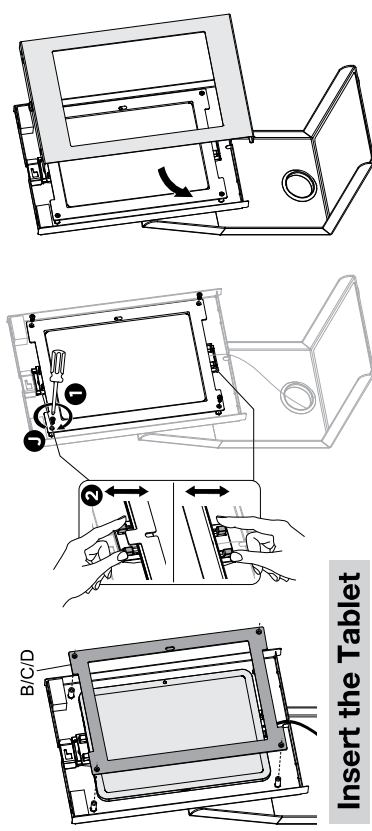

Insert the Tablet

- Select the appropriate Tablet Adapter for your tablet by referencing the compatibility guide below.

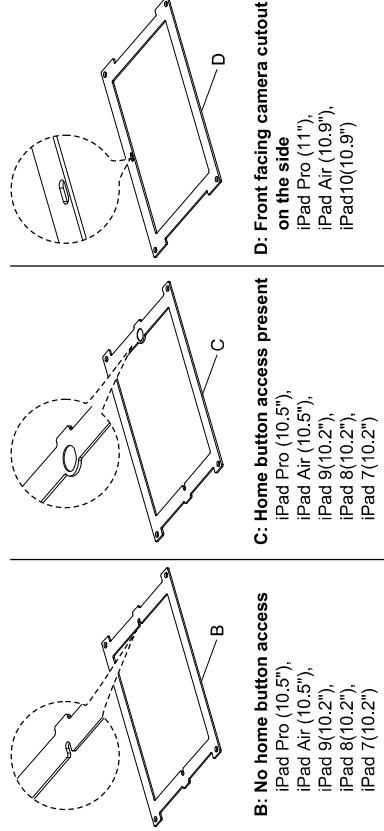


B: No home button access
iPad Pro (10.5"),
iPad Air (10.5"),
iPad 9(10.2"),
iPad 8(10.2"),
iPad 7(10.2")

C: Home button access present
iPad Pro (10.5"),
iPad Air (10.5"),
iPad 9(10.2"),
iPad 8(10.2"),
iPad 7(10.2")

D: Front facing camera cutout on the side
iPad Pro (11"),
iPad Air (10.9"),
iPad 10(10.9")


- Tablet Adapter (#C) can be used with the preinstalled soft button cover to allow for the tablet home button to be pressed, or it may be removed and replaced with the hard Button Cover (#E) which will prevent the tablet home button from being pressed.

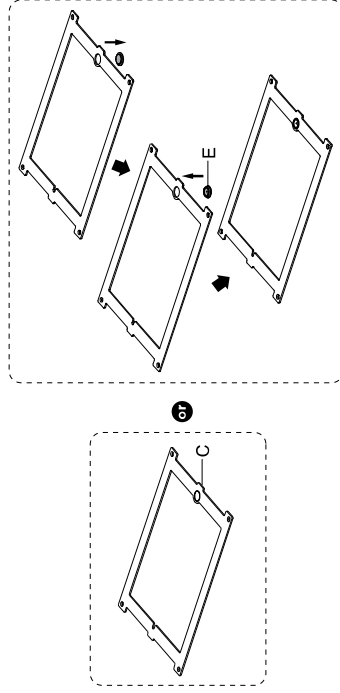

Step 7

Lock the Case

- Insert the key into the lock and turn the key clockwise to lock the case

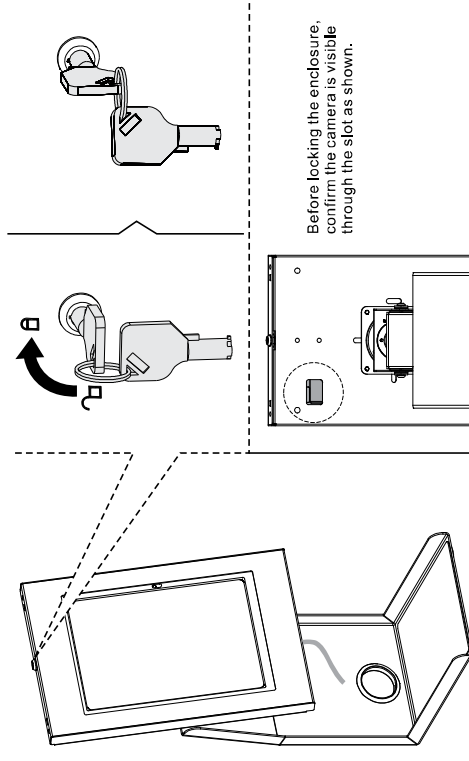


Before locking the enclosure, confirm the camera is visible through the slot as shown.

Step 8

Final Adjustments

- The tablet case can be tilted forward and backwards for multiple viewing angles, and can be rotated 90 degrees to alternate between landscape and portrait orientation.

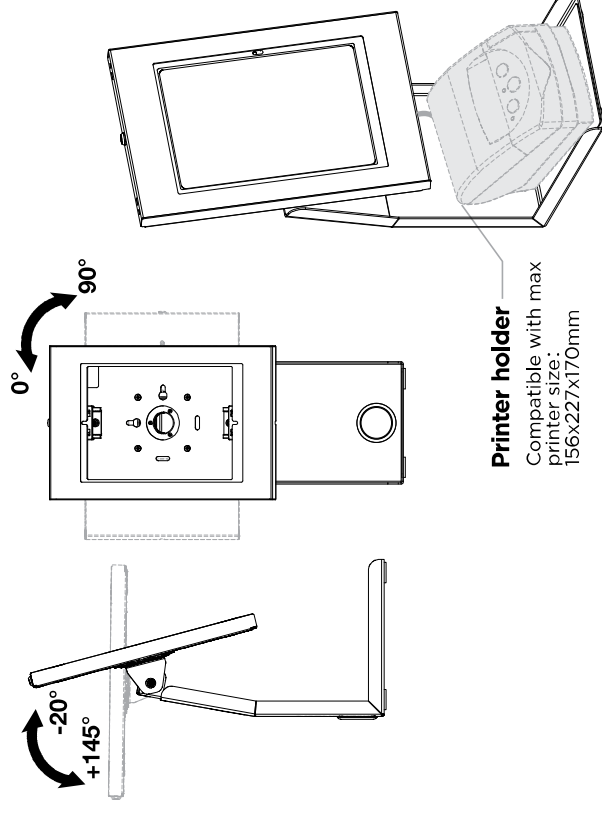

Printer holder

Compatible with max printer size: 156x227x170mm

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.



support@mount-it.com

Available by phone **Monday - Friday from 5:00am to 5:00pm** PST.



(855) 925-5668

Chat live with an agent on our website!



www.mount-it.com