
MOUNT-IT!

User Manual

SKU: MI-2753BLK
SKU: MI-2753WHT
V1 06/25

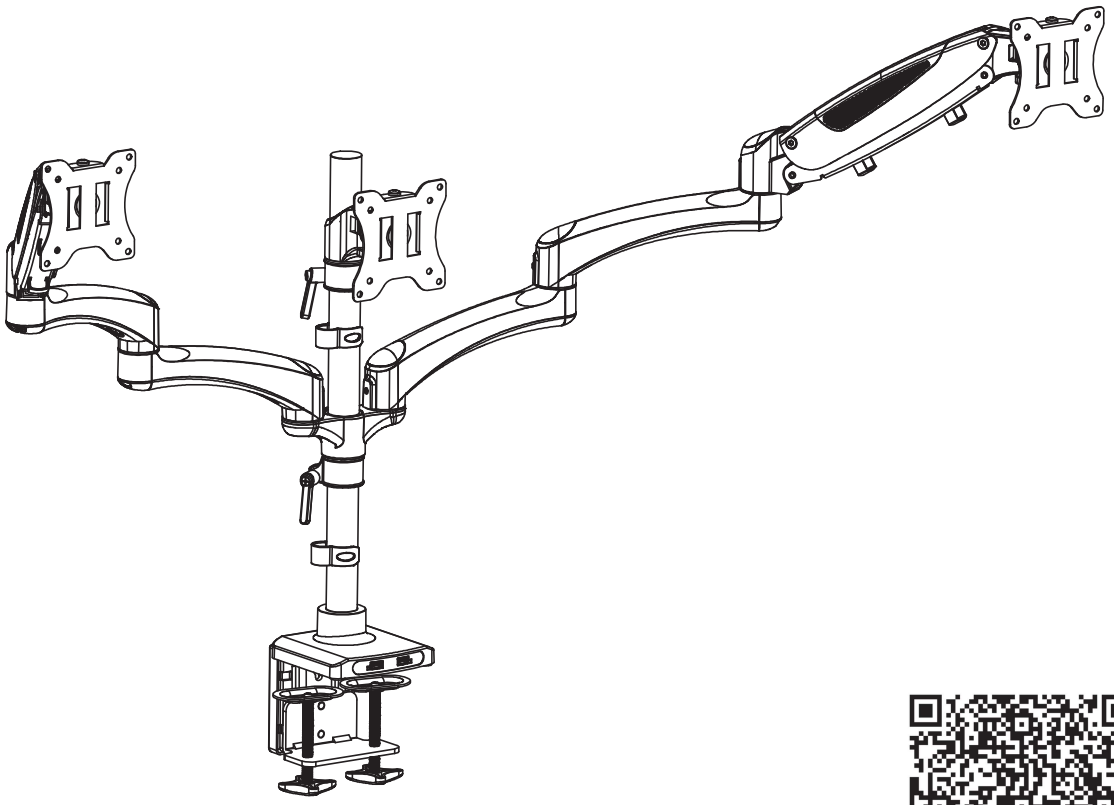

Please scan this QR code to visit the product page

Triple Monitor Desk Mount

HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST

support@mount-it.com (855) 925-5668 www.mount-it.com

Thank you for choosing Mount-It!

EN Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact Mount-It! for assistance.

⚠ **CAUTION:** Use with products heavier than the rated weights indicated may result in instability causing possible injury.
• Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
• This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact Mount-It! for a replacement.
MAINTENANCE: Check that the product is secure and safe to use at regular intervals (at least every three months).

DE Lesen Sie die gesamte Bedienungsanleitung, bevor Sie mit der Installation und Montage beginnen. Wenn Sie Fragen zur Anleitung oder Warnungen haben, wenden Sie sich bitte an Ihren örtlichen Händler.

⚠ **VORSICHT:** Die Verwendung mit Produkten, die schwerer als die angegebenen Nenngewichte sind, kann zu Instabilität führen und zu möglichen Verletzungen führen.
• Bitte befolgen Sie die Montageanleitung genau. Eine unsachgemäße Installation kann zu Schäden oder schweren Verletzungen führen.
• Dieses Produkt enthält Kleinteile, die beim Verschlucken eine Erstickungsgefahr darstellen können. Halten Sie diese Gegenstände von Kindern fern.
WICHTIG: Stellen Sie vor der Installation sicher, dass Sie alle Teile gemäß der Komponenten-Checkliste erhalten haben. Bei beschädigten oder fehlenden Teilen, wenden Sie sich an Ihre Verkaufsstelle, um Ersatz zu erhalten.
WARTUNG: Überprüfen Sie das Produkt in regelmäßigen Abständen auf Sicherheit und Stabilität (am besten alle drei Monate).

FR Lisez entièrement le guide d'utilisateur avant de commencer l'installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, veuillez contacter votre distributeur local pour une assistance.

⚠ **ATTENTION:** L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.
• Les supports doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
• Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Eloignez ces pièces des enfants.
IMPORTANT: Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour qu'il la remplace.
MAINTENANCE: A intervalles réguliers (au moins tous les trois mois) vérifiez que le support est d'utilisation sûre et fiable.

RU Перед началом установки и сборки прочитайте руководство по установке. Если у Вас возникли какие-либо вопросы относительно инструкций или предупреждений, свяжитесь с Вашим локальным распространителем для получения помощи.

⚠ **Внимание:** Использование продуктов, вес которых превышает указанный расчетный вес, может привести к неустойчивости и возможным травмам.
• Опоры должны быть установлены, как это показано в Монтажных инструкциях. Неправильная установка может привести к получению серьезных травм.
• Данный продукт содержит маленькие детали, которые представляют опасность удушения при проглатывании. Такие детали необходимо хранить в недоступном для детей месте.
ВАЖНО: Перед установкой убедитесь, что Вы получили все детали в соответствии со списком комплектующих. Если не хватает каких-либо деталей или они поломаны, свяжитесь с Вашим местным распространителем по вопросу замены.
ТЕХНИЧЕСКОЕ ОБСЛУЖИВАНИЕ: Необходимо регулярно проверять (как минимум, раз в три месяца), чтобы кронштейн был зафиксирован, и его использование было безопасным.


ES Lea todo el manual de instrucciones antes de comenzar la instalación y ensamble de la unidad. Si tiene alguna inquietud con respecto a las instrucciones o advertencias, comuníquese con su distribuidor local.

⚠ **PRECAUCION:** utilizar con productos de mayor peso al indicado en los límites de peso podría ocasionar inestabilidad y posibles heridas personales.
• Los soportes deben acoplarse tal como se indica en las instrucciones de ensamble. Una incorrecta instalación podría ocasionar daños y serias heridas personales.
• Este producto contiene piezas pequeñas que representan un riesgo de asfixia. Mantenga estas piezas fuera del alcance de los niños.
IMPORTANTE: Asegúrese de que haya recibido todas las piezas según la lista de verificación de componentes para la instalación. Si falta alguna de las partes, o está dañada, comuníquese con su distribuidor.
MANTENIMIENTO: Compruebe periódicamente que el soporte esté asegurado y listo para usar (al menos cada tres meses).

PT Leia todo o manual de instruções antes de iniciar a instalação e montagem. Se você tiver alguma dúvida sobre quaisquer uma das instruções ou avisos, por favor, entre em contato com o seu distribuidor local para assistência.

⚠ **ATENÇÃO:** O uso com produtos mais pesados do que os pesos indicados pode resultar em instabilidade, causando possíveis danos.
• Os suportes devem ser anexados como especificado nas instruções de montagem. A instalação incorreta pode causar danos ou sérias lesões pessoais.
• Este produto contém pequenas peças que podem causar asfixia se ingeridas. Mantenha esses itens longe do alcance de crianças.
IMPORTANTE: Assegure-se que você recebeu todas as peças, de acordo com a lista de componentes, antes da instalação. Se alguma peça estiver faltando ou é defeituosa, contate o seu distribuidor local para substituição.
MANUTENÇÃO: Certifique-se que o suporte seja seguro e protegido para o uso em intervalos regulares (pelo menos a cada três meses).

Monitor Arm Weight:
(17.6lbs/screen)






CAUTION: DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!


PACKAGE CONTENTS




A (x1)
Pole




B (x3)
VESA Plates




C (x1)
Monitor Mount




D (x1)
Dual Arm Connector

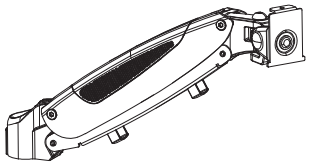


E (x2)
Gas Spring Arms



F (x4)
Extension Arms



G (x1)
Base



H (x1)
Clamp L-Bracket



I (x1)
Clamp Handles



J (x1)
Clamp Cover

HARDWARE CONTENTS



K (x12)
M4x8 Bolts



L (x12)
M4x12 Bolts



M (x12)
M4x30 Bolts



N (x12)
12x5.8x16 Spacers



O (x2)
Cable Management Clips



P (x6)
Plastic Covers



Q (x1)
3mm Hex Wrench




R (x1)
4mm Hex Wrench



S (x1)
5mm Hex Wrench




T (x2)
Clamp Collars



U (x3)
M6x8 Bolts




V (x2)
M8x12 Bolts



W (x3)
M6x25 Bolts



X (x4)
M6x12 Bolts



Y (x1)
Non-Slip Pad

Z1 (x1)
M10x100
Grommet Bolts





Z2 (x1)
15x10.1x2.5
Grommet Washers

Step 1 A

Clamp Installation


- Insert the Pole (#A) into the Base (#G). Secure it from the bottom using two M6x25 Bolts (#W) with the 4mm Hex Wrench (#R).
- Attach the Clamp L-Bracket (#H) to the Base (#G) using two M6x12 Bolts (#X) and tighten using the 4mm Hex Wrench (#R). Place the Non-Slip Pad (#Y) on the underside of the clamp.
- Partially attach the two M8x12 Bolts (#V) to the back of the Clamp Handles (#I). Do not fully tighten at this stage.
- Hook the Clamp Handles onto the L-Bracket, then tighten the Bolts (#V) until secure.

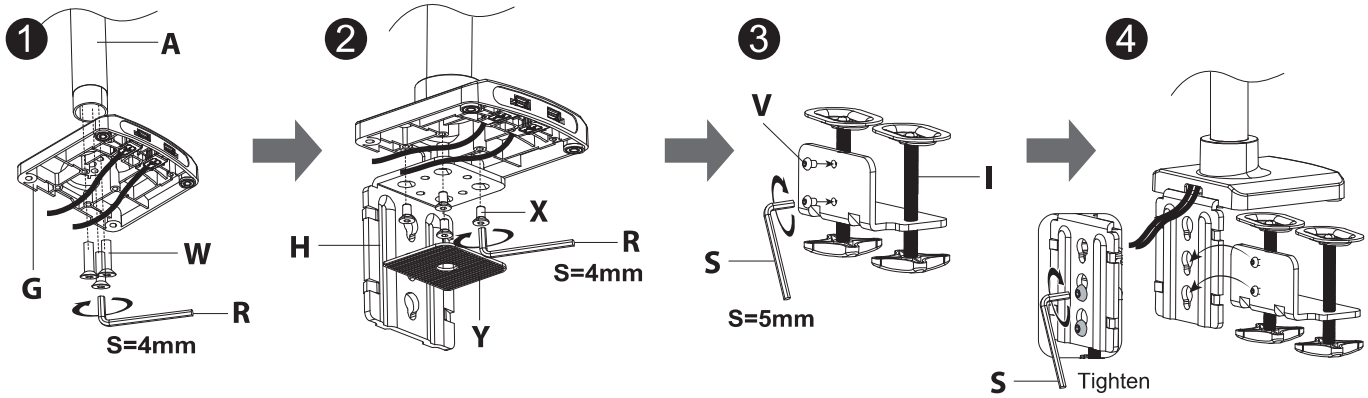

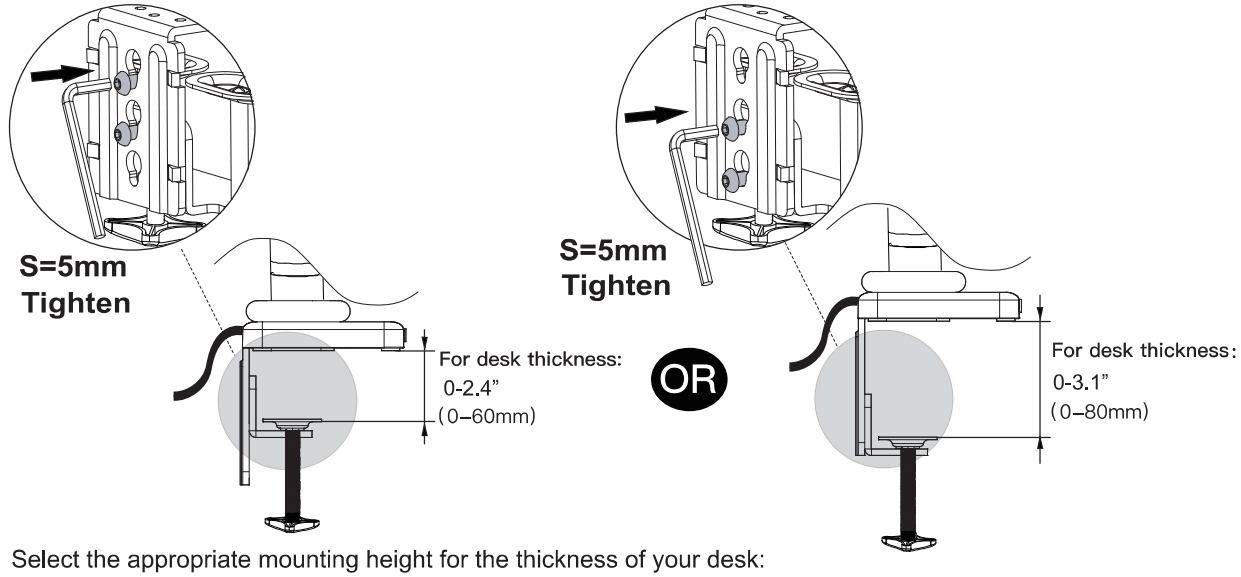

Select the appropriate mounting height for the thickness of your desk:

- For desk thickness 0–2.4" (0–60mm), use the lower mounting slot.
- For desk thickness 0.3–3.1" (0–80mm), use the upper mounting slot.

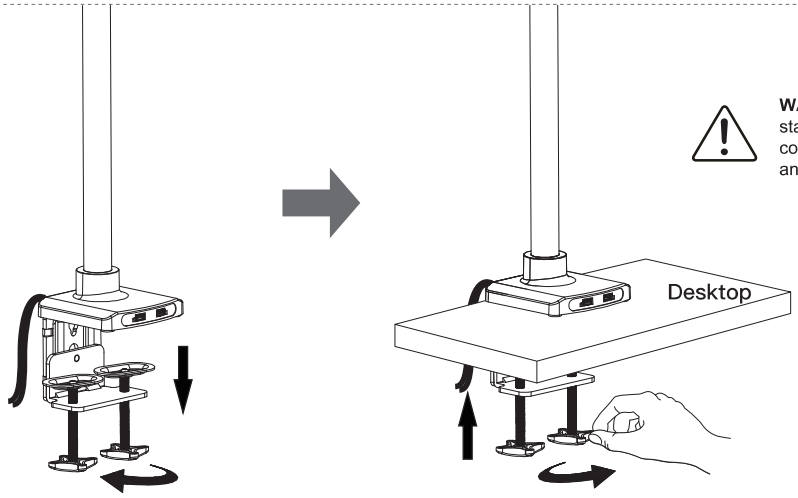


WARNING: Ensure the desk surface is stable and capable of supporting the combined weight of the monitor arms and displays.

Position the assembly onto the edge of your desk and tighten the Clamp Handles (#I) from underneath the desk until the mount is securely clamped to the surface.

Step 1 B

Grommet Installation

- Remove one of the clamping plates from the end of the Clamp Handles by removing the small bolt in the middle of the plate.
- Slide the Grommet Washer (#Z2) followed by the clamping plate onto the end of the Grommet Bolt (#Z1).
- Place the pole assembly over the top of the grommet hole, and secure it from beneath using the Grommet Bolt and tighten it until it is securely clamped to the desk with the Hex Wrench (#S).

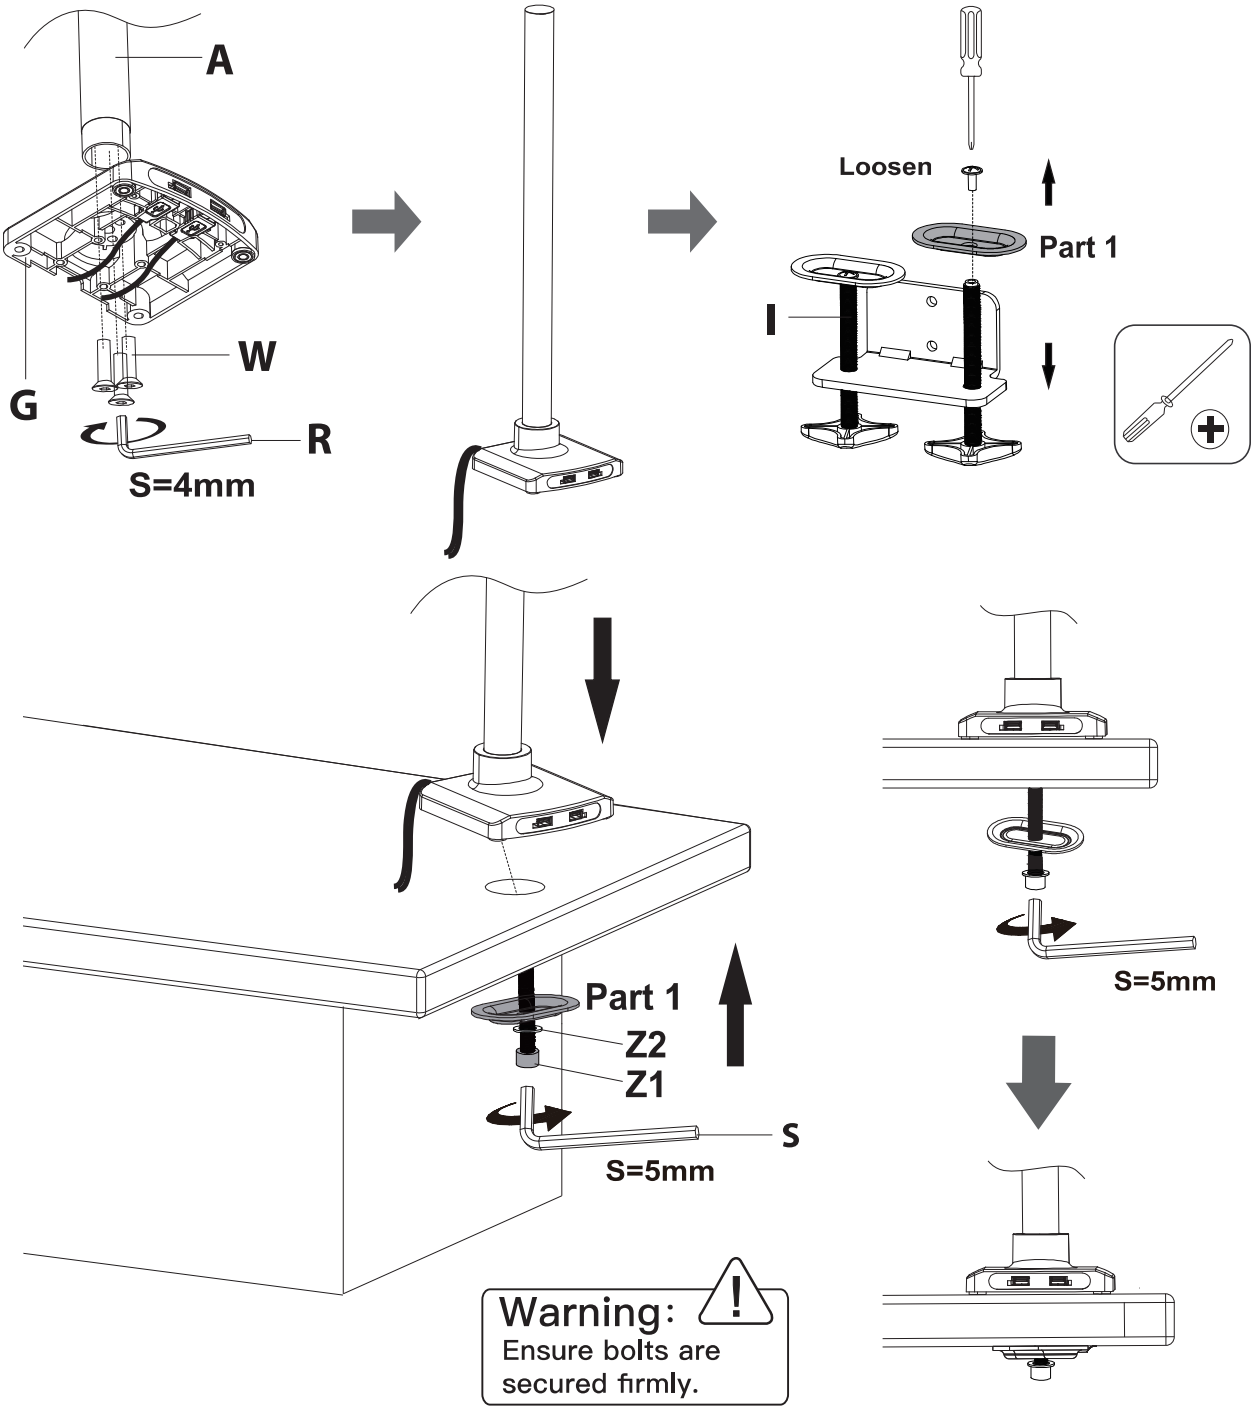



NOTE: If your desk has an existing grommet hole,remove plastic cover before installation. If there is no existing grommet hole,make a mark on your mounting surface,and use a drill to drill a hole (10-12mm) in the mounting surface.


Step 2


Assemble the Arm Connectors

- Slide one Clamp Collar (#T) onto the Pole (#A) .
- Lower the Dual Arm Connector (#D) onto the Pole (#A), resting it on the first Clamp Collar (#T) and tighten it securely in place using the 5mm Hex Wrench (#S).
- Install a second Clamp Collar (#T) and adjust the height of both collars as needed.

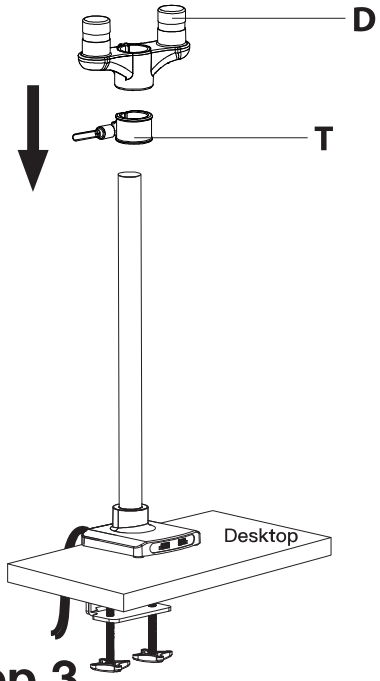

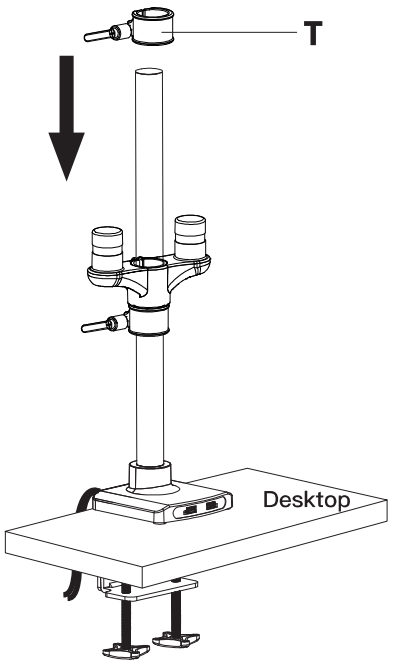

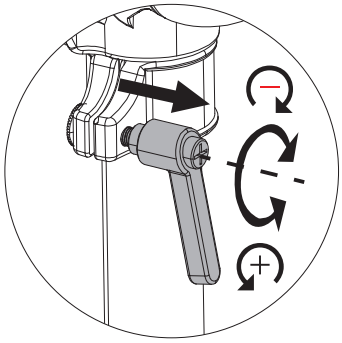


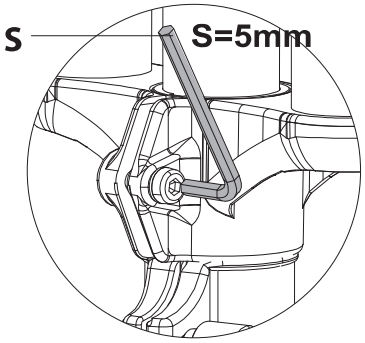


Step 3

Arm Installation


- Insert Extension Arms (#F) into the sockets on the Dual Arm Connector (#D), then add the next two Extension Arms to the end of the first pair.
- Once fully seated, secure the arms using the 3mm Hex Wrench (#Q) to tighten the set screws.
- Insert the Plastic Covers (#P) into the open slots on the top of the arms to conceal the mounting joints.

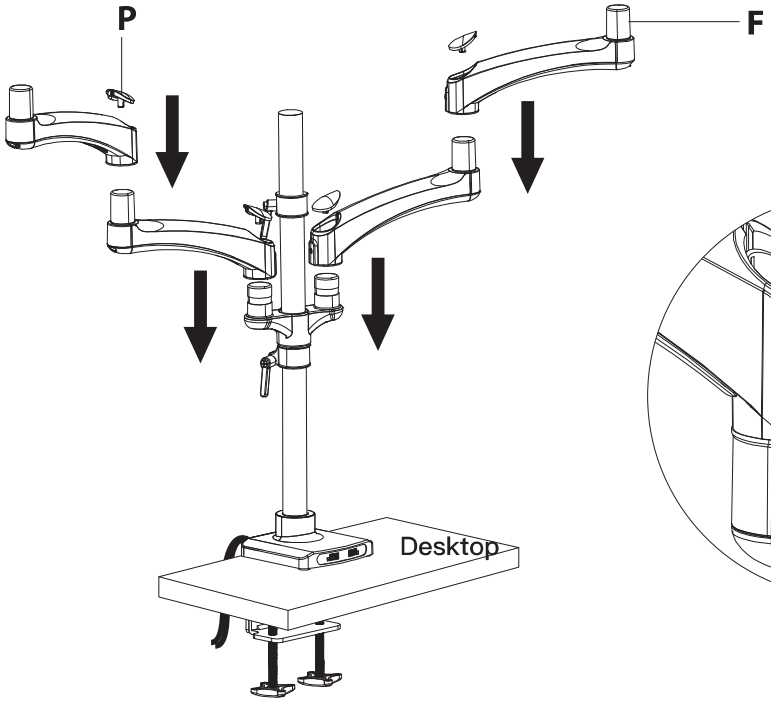

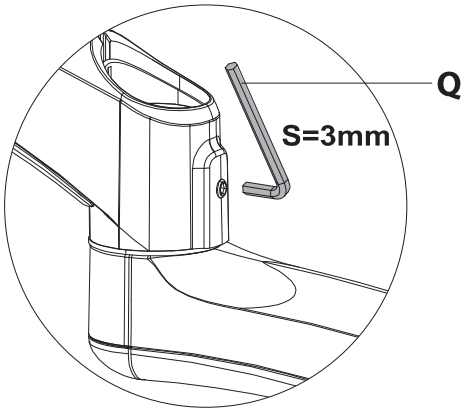


Step 4
Finish the Arm Assembly


- Slide the Monitor Mount (#C) onto the center pole until it rests on the collar.
- Install the Gas Spring Arms (#E) onto the outer Extension Arms (#F).
- Tighten the set screws for each joint using the 3mm Hex Wrench (#Q).
- Insert the Plastic Covers (#P) into the top of the Gas Spring Arms (#E) to conceal the mounting joints.

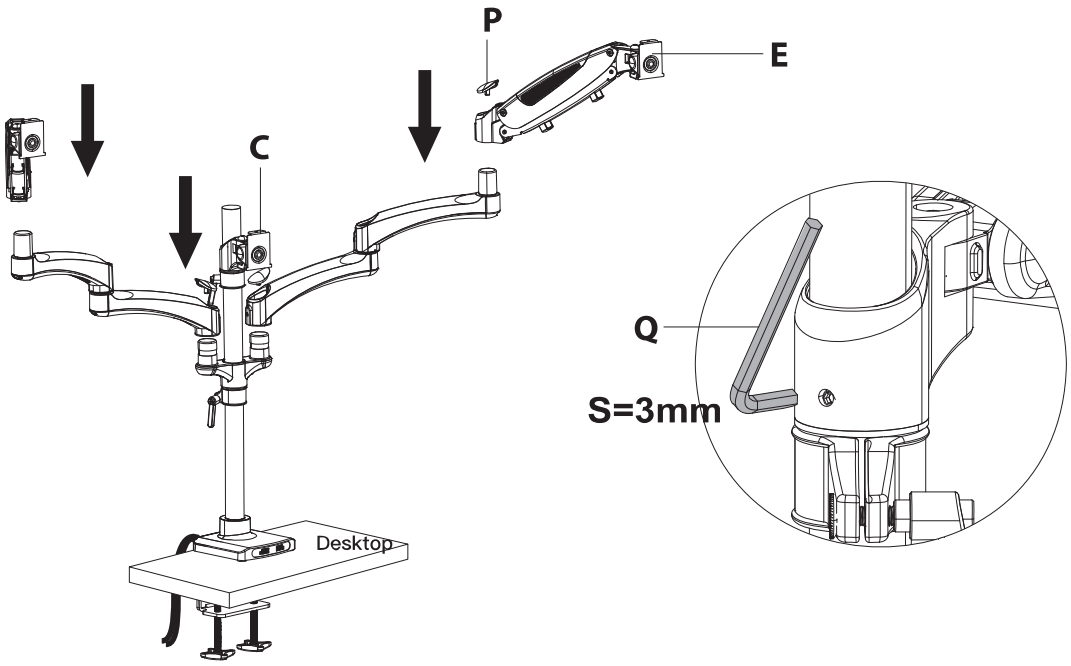

Step 5
Monitor Installation




- Select the appropriate size mounting bolt (Select one size #K, or #L, #M) for your display's mounting holes and verify the length of the VESA bolt is not too long. If you are unsure of the correct bolt size for your display refer to your monitor user manual or contact the monitor manufacturer for sizing information.
  If necessary use the provided Spacers (#N) between the monitor and VESA Plate.
- Install the VESA Plate onto the back of the monitor using the selected hardware.

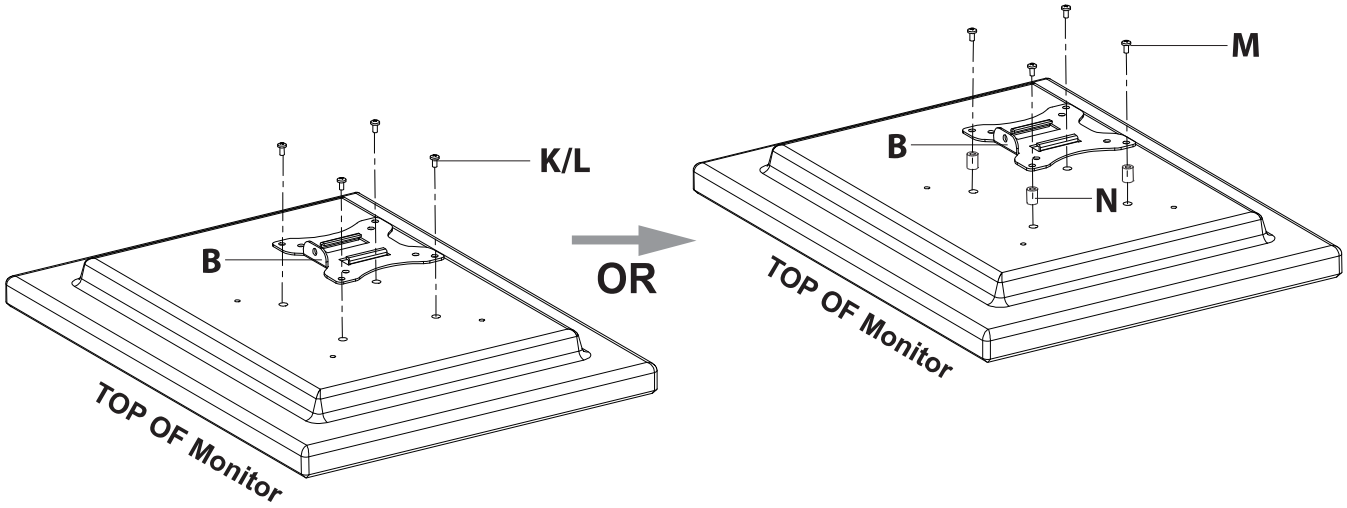


Step 6

Monitor Installation

- Align the VESA Plates (#B) with the attachment points on the ends of the Gas Spring Arms (#E) and Monitor Mount (#C).
- Carefully slide each monitor into place on the corresponding arm bracket.
- Secure the connection by installing the M6x8 Bolts (#U) to the top of each VESA plate.

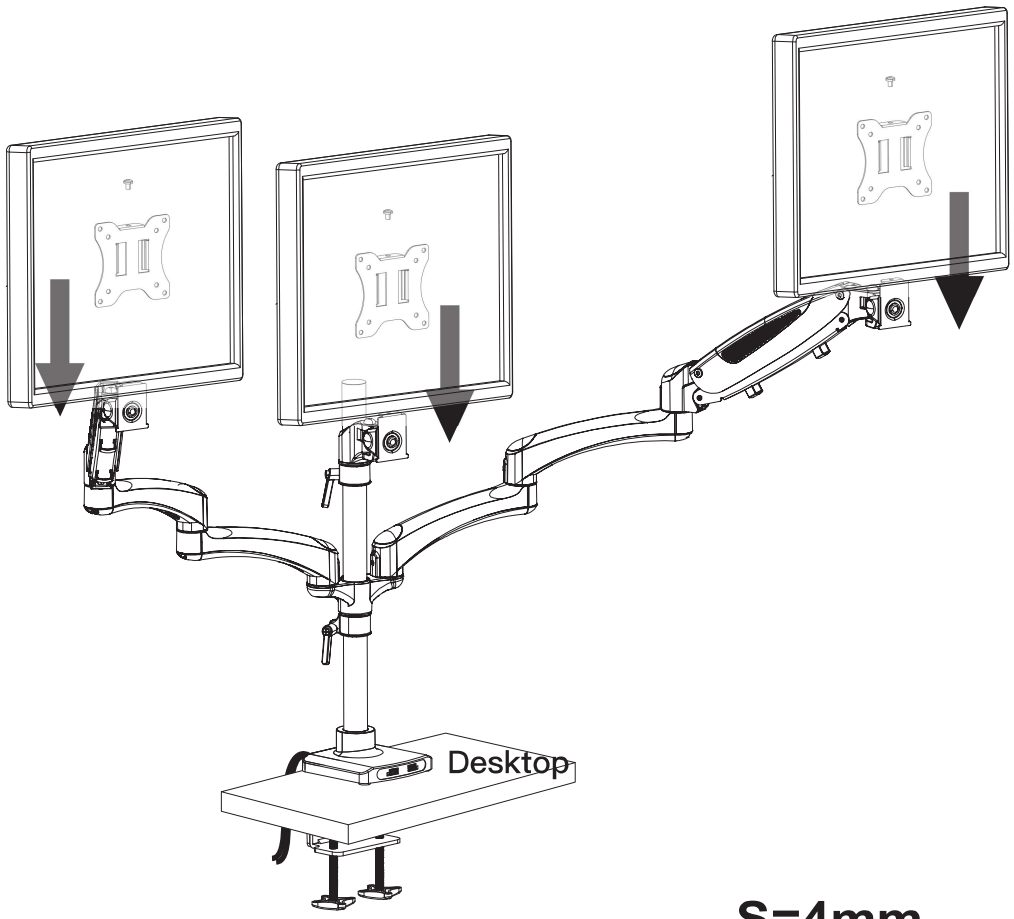


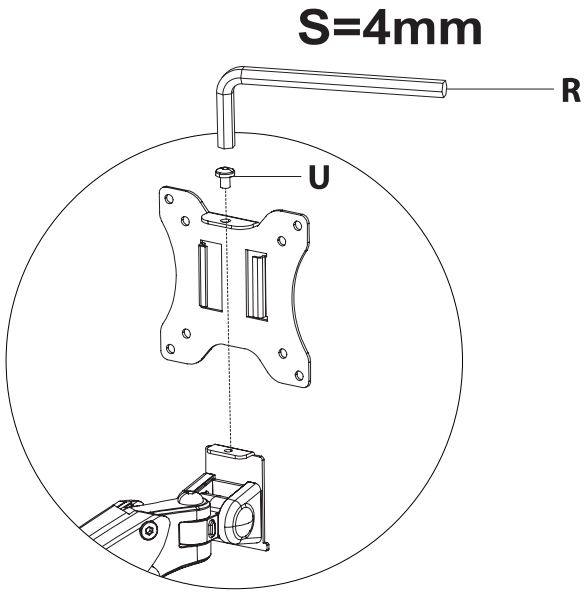


Step 7


Weight Balancing the Gas Spring Arms

Gas Spring tension may need to be adjusted to suit the weight of the monitors.
To weight balance the two gas spring arms, begin by pushing the arm down to the lowered position, then use the 5mm Hex Wrench (#S) to adjust the bolt as pictured here, turning counterclockwise toward the + (plus) sign for heavier monitors, increasing the tension and clockwise toward the – (minus) sign for lighter monitors, lowering the tension. Adjust until the arm does not raise back to the highest position or sink to the lowest position when released. This might require multiple rotations to reach the desired tension.

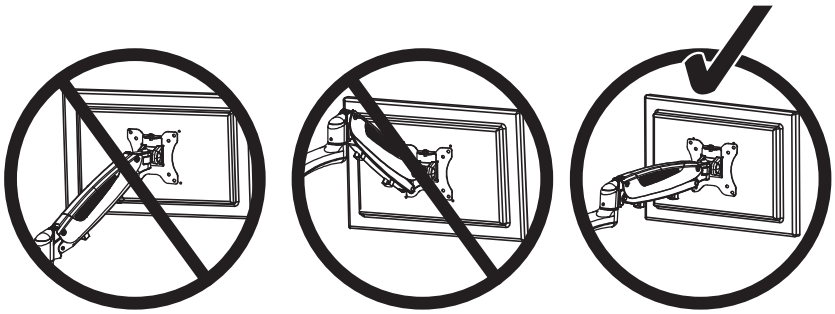

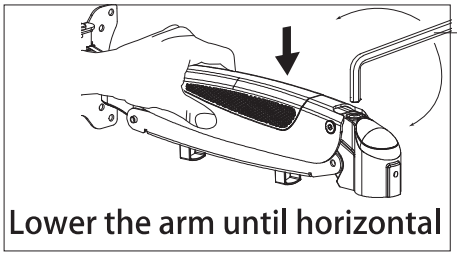

Keep the arm in a horizontal position during adjustment to make the adjustment and balancing easier.

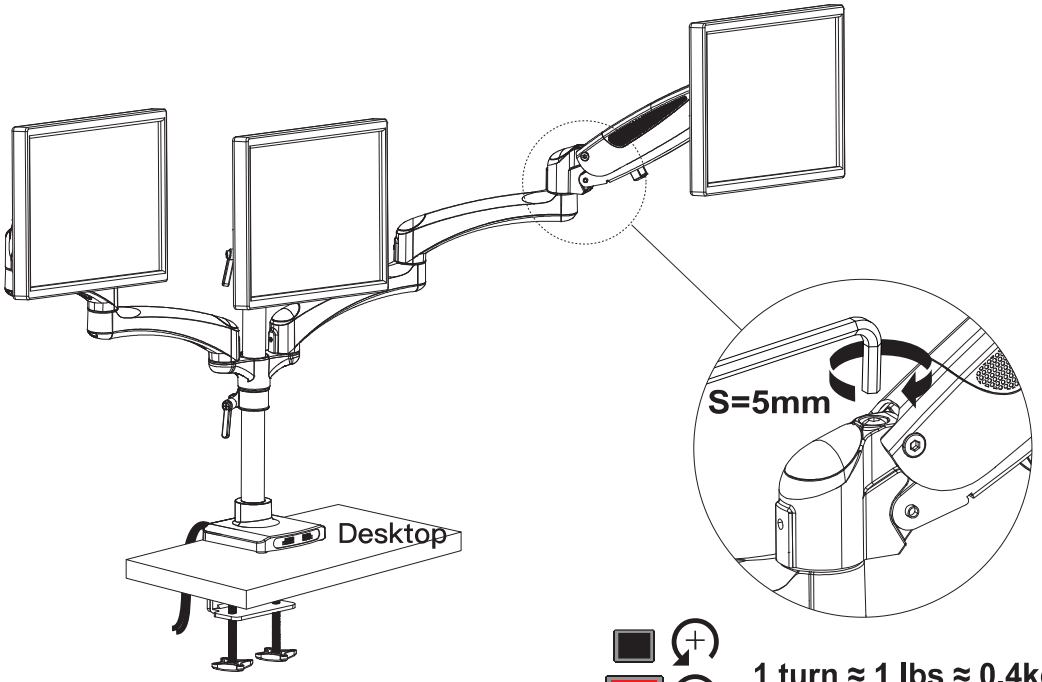

1 turn ≈ 1 lbs ≈ 0.4kg

NOTE: Turn clockwise to reduce tension for lighter monitors and counter-clockwise to increase tension for heavier monitors.

Step 8


Tilt & Swivel Adjustment

Monitor Tilt & Swivel Adjustments:

- Use the 5mm Hex Wrench (#S) to fine-tune tilt and swivel tension on each VESA Plate (#B).
- Adjust the tilt bolt on the side of the joint to control monitor angle up and down.
- Adjust the swivel bolt on the top of the joint to control monitor rotation side to side.


Arm Swivel Adjustment:

- Use the 3mm Hex Wrench (#Q) to tighten or loosen the set screws to adjust the swivel of each individual arm joint.

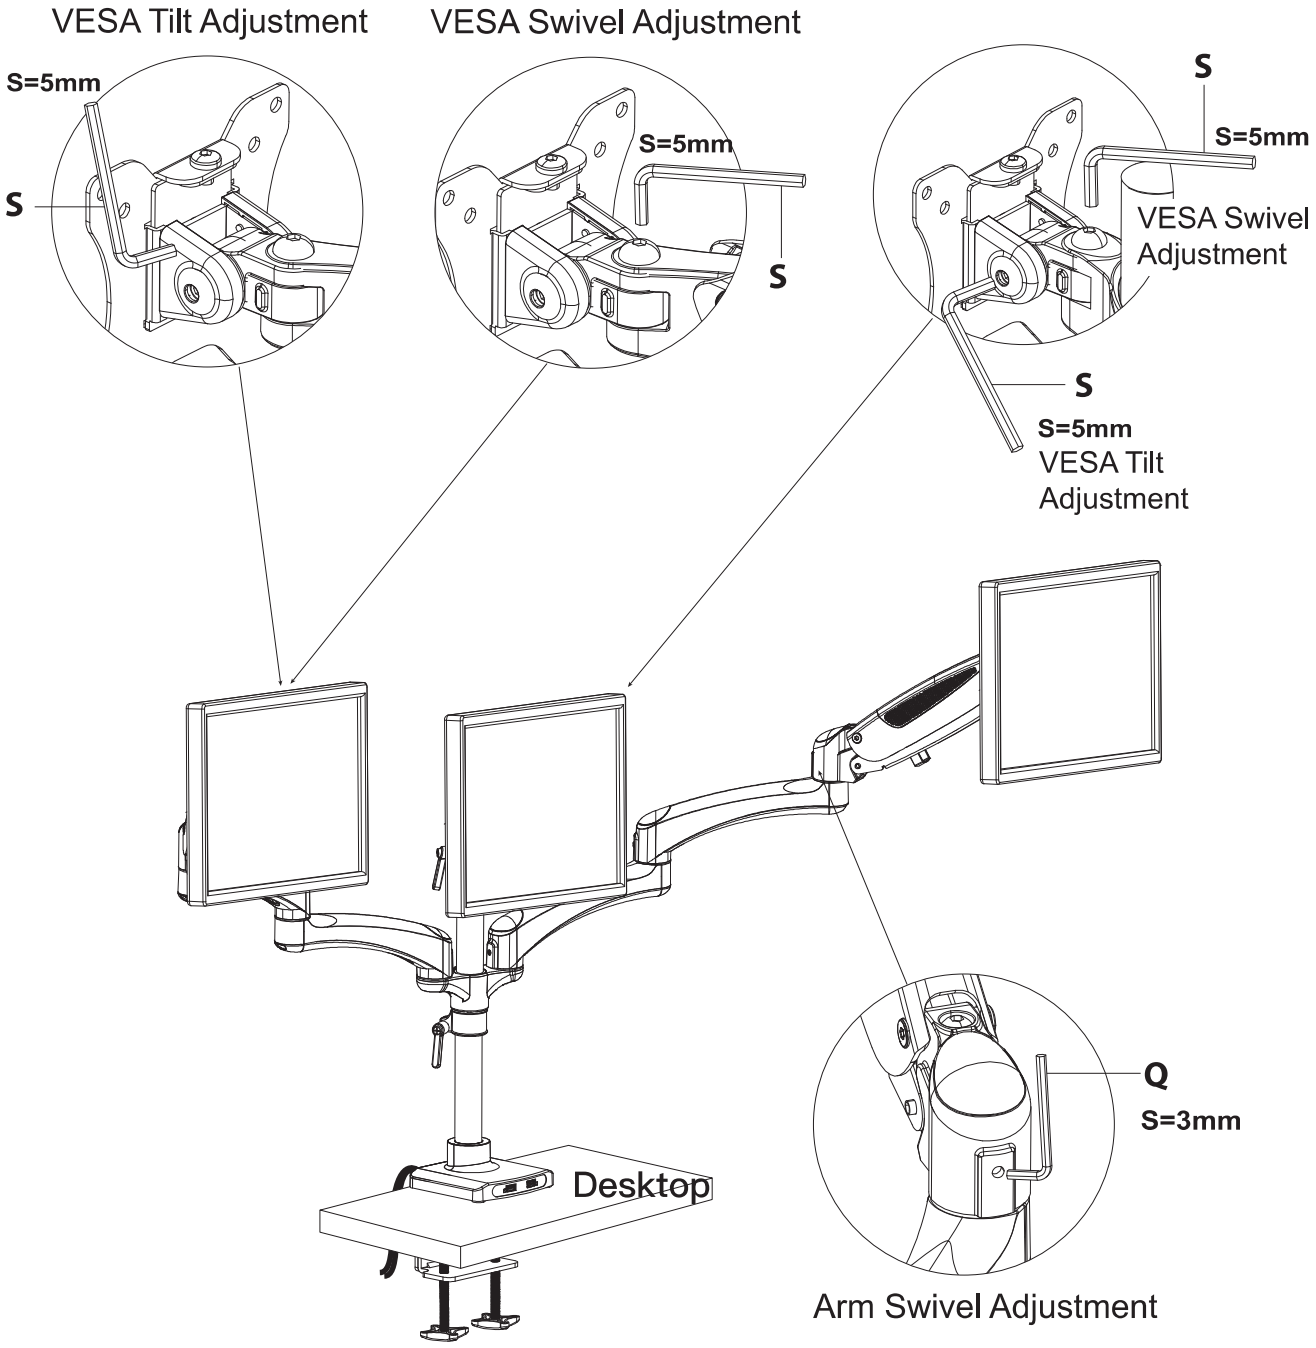


Step 9
Cable Management

- Attach the Cable Management Clips (#O) to the Pole (#A) and route any cables through the clips to reduce clutter and prevent snagging during arm movement.
- Align the Clamp Cover (#J) over the rear of the Clamp Base and secure it in place.
- Store the 3mm Hex Wrench (#Q) and 5mm Hex Wrench (#S) in the cover for easy access when needed.

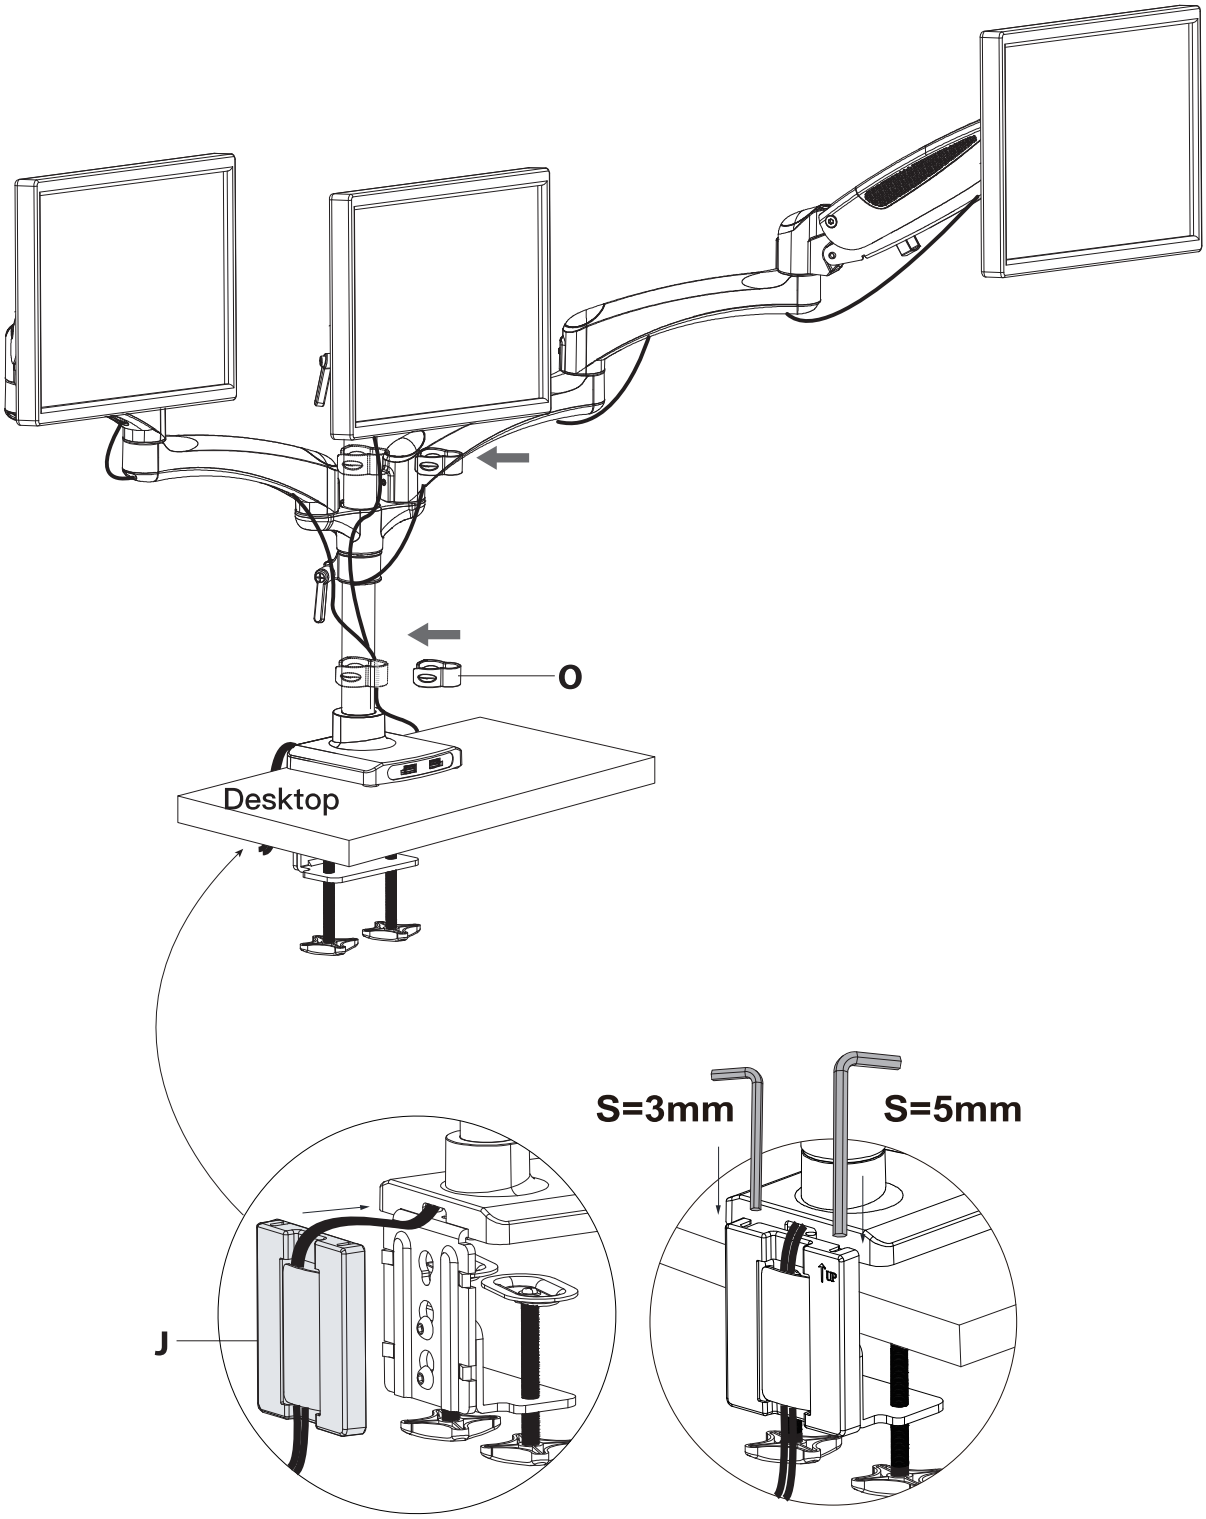

Step 10

Base Function

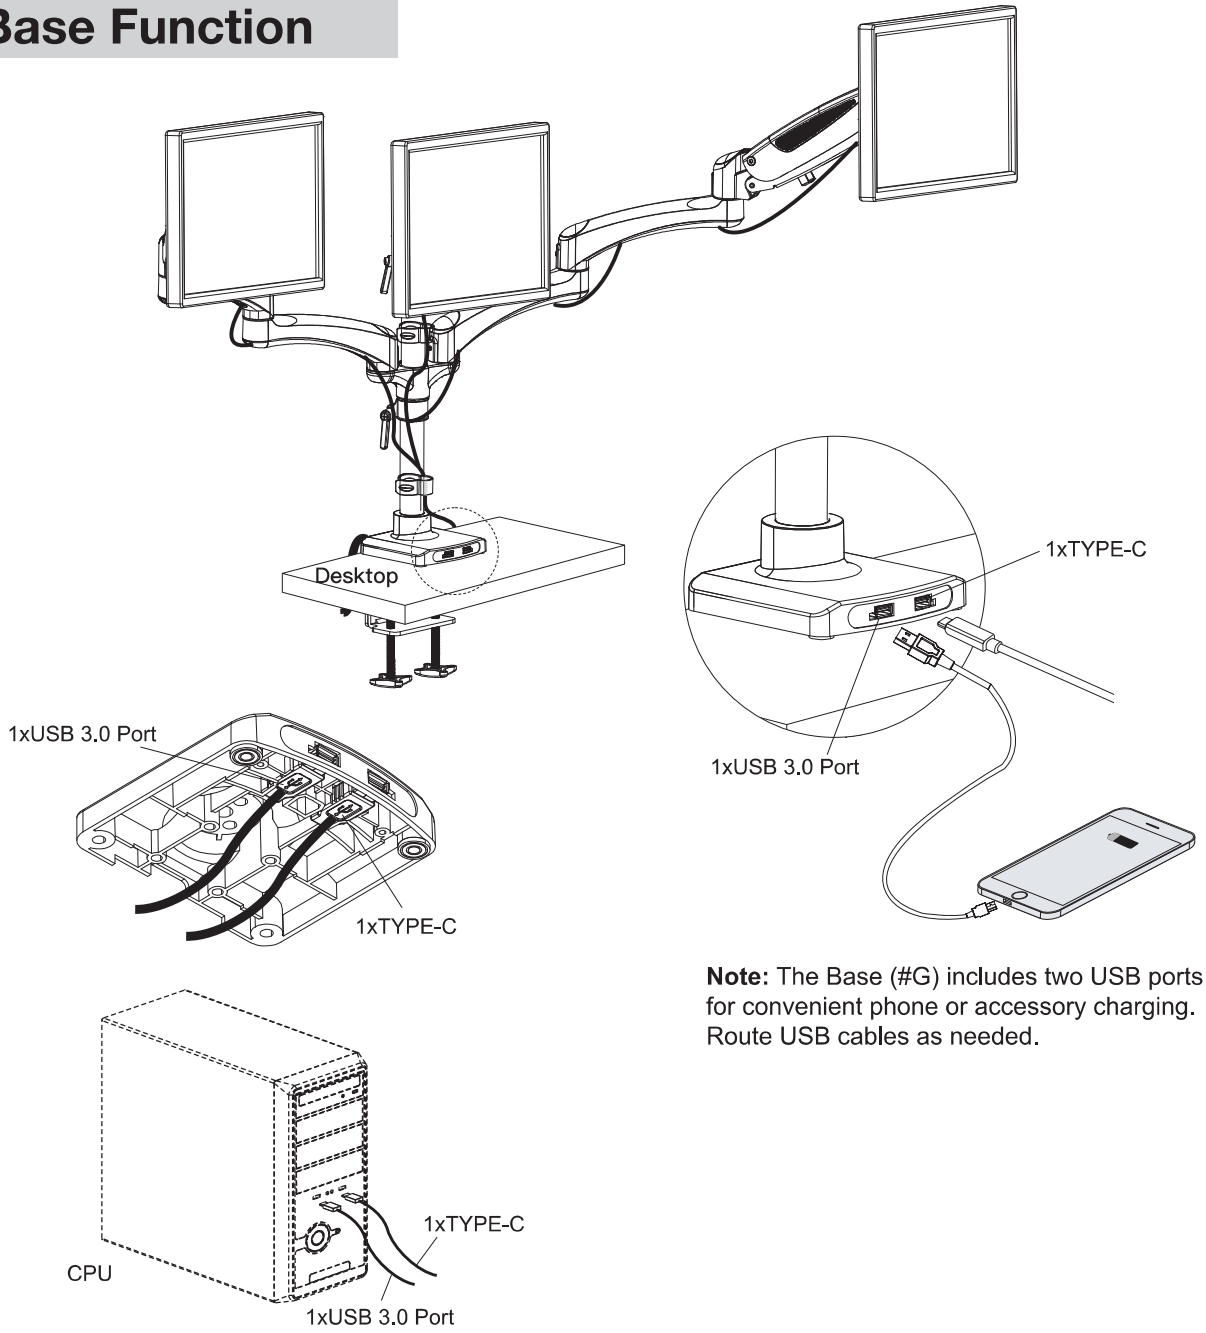

Note: The Base (#G) includes two USB ports for convenient phone or accessory charging. Route USB cables as needed.

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.

Available by phone **Monday - Friday from 5:00am to 5:00pm** PST.

Chat live with an agent on our website!

support@mount-it.com

(855) 925-5668

www.mount-it.com