


ASSEMBLY INSTRUCTION

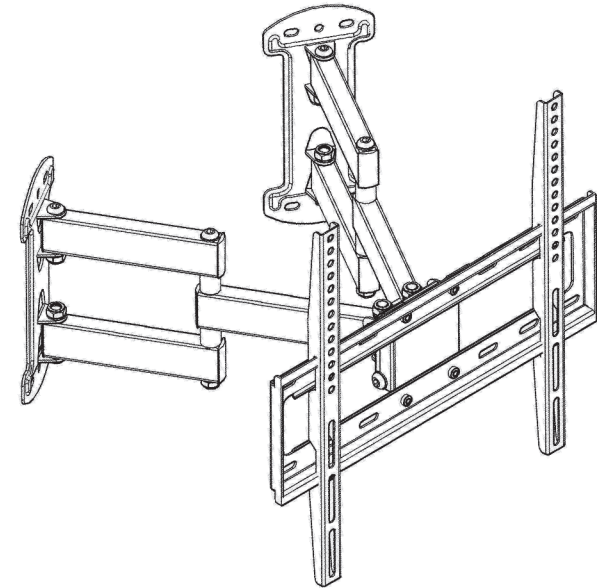


MODEL:MI-4481

- Please read this instruction carefully before assembly.
- Fits for 26-55in plasma and LCD TV.
- Weight Capacity:30KG(66LBS).

Safety Warning:

Never let children climb on product or play with product.
 Do not sit or stand on product.
 Do not fasten a TV that is heavier than the recommended load rating to the mount.
 Using suitable concrete wall or wood stud wall.
 Improper installation may cause property damage and/or personal injury, so the installation must be done by two qualified contractors. The manufacture is not liable for damage or injury caused by incorrect mounting, assembly or use.
 Improper handling can result in cuts and lacerations.
 Pictures for reference only,subject to our available products.
 Keep this instruction for future reference.


● Part list:

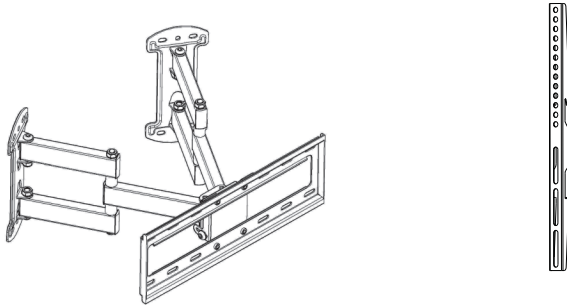

a-Wall plate unit 1pc b-Bracket 2pcs

Hardware list:

				
A--Lag bot 4PCS	B--anchor 4PCS	C--M8 washer 4PCS	D--4mm Allen key 1PCS	E--M8 spacer 4PCS
				
F--M8 spacer 8PCS	G--M6 washer 4PCS	H--M5x25 bolt 4PCS	I--M6x25 bolt 4PCS	J--M8x25 bolt 4PCS

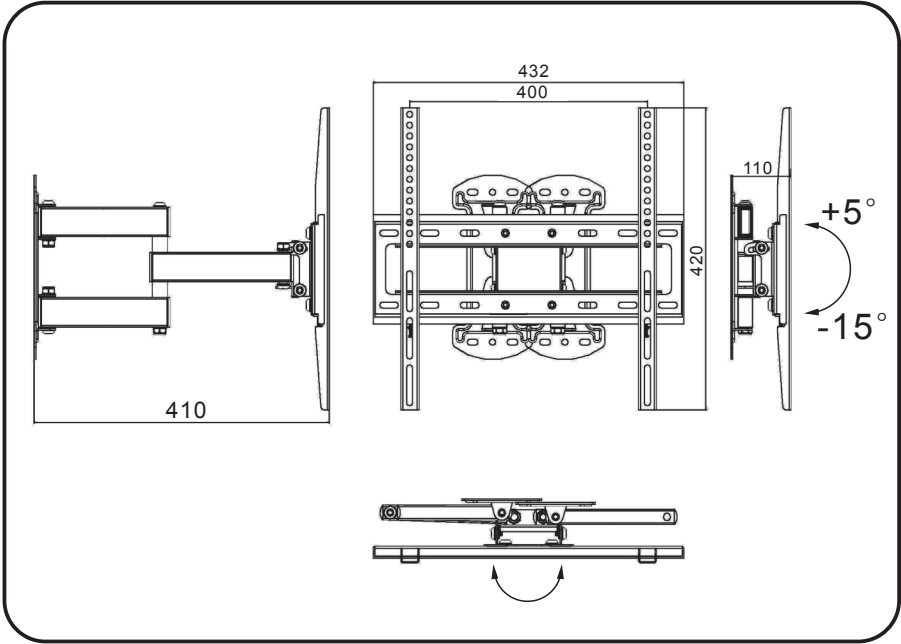


Pay extra care and attention when you fasten two TV mounts to the brack panel of TV in step3 make sure the appropriatae mount hardware is being used properly.

1. Select correct Mounting Hardware according to the screw hole size of your TV, discard any remaining screws or spacers.
2. Carefully lay your TV on its face on a non-abrasive surface, making sure to lay padding underneath it so as not to damage the screen.
3. Place left TV mount and right mount in the appropriate position, making sure CENTERED on the back of the TV and LEVEL with on another.
4. This product only install on the perpendicular wall, not install on the ceiling.

Step 5: Tilting angle adjustment and level the mount.

You may need loosen the bolts with Allen key(d) to adjust TV to your desired angle please remember to fasten the bolts tightly after adjustment.

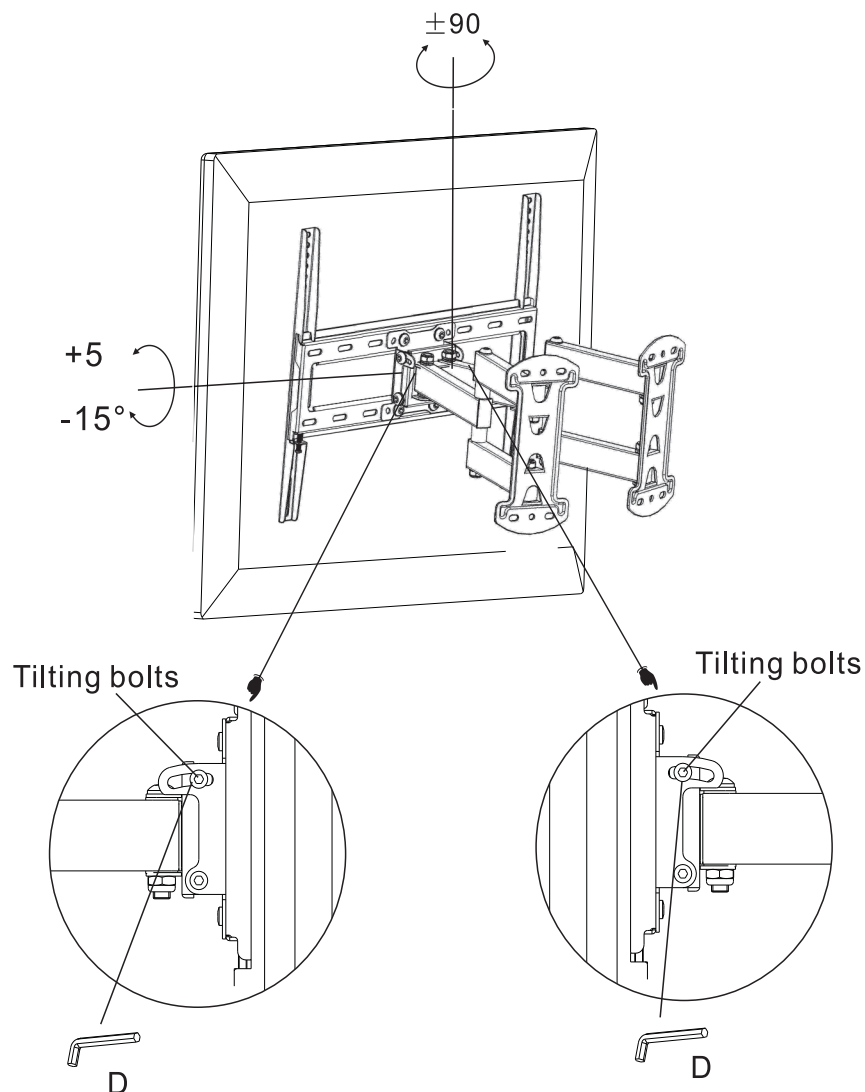


Before getting started, let's make sure this is perfect for you!




1. Your TV (including accessories) cannot exceed 66 LBS.
2. Verify your wall construction
3. Grab your tools.

CAUTION:
DO NOT
install into
drywall alone



Drywall




Concrete wall




Stud Finder




Tape Measure




Pencil




Electric Drill




Drill Bit



Drill Bit



Socket Wrench




Level


Step 1a: Wall plate installation in wood stud

To avoid potential body injury or property damage:


1. Wall mount must be installed into wood stud's center, not dry alone.
2. Drywall covering the wood stud must not exceed 16mm (5/8 in)
3. Minimum wood stud size: 2x4 in. Nominal 1 1/2x3 1/2 in.
4. The wall must be capable of supporting five times the weight of TV plus mount.
5. Make sure the Bolt head on the wall plate is upward as the picture shows.
6. All lag bolts must be firmly tightened to prevent unwanted movement of the wall plate. Ensure the wall plate is securely fastened to the wall before continuing on to the next step.

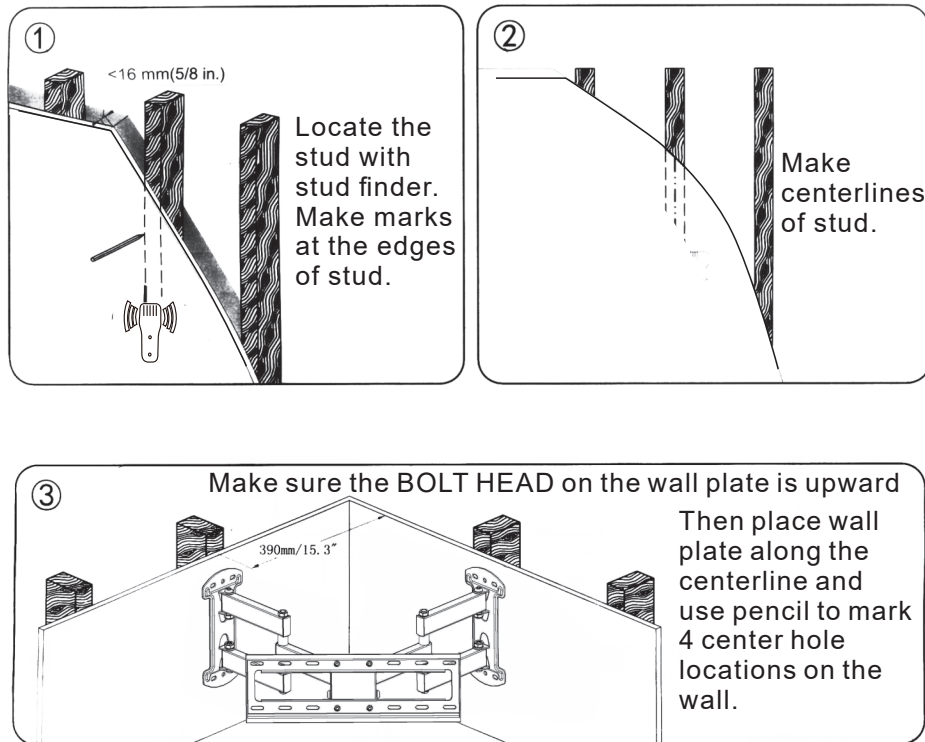


Step 4: Hang pre-assembled TV unit on the wall plate then lock the safety screws.

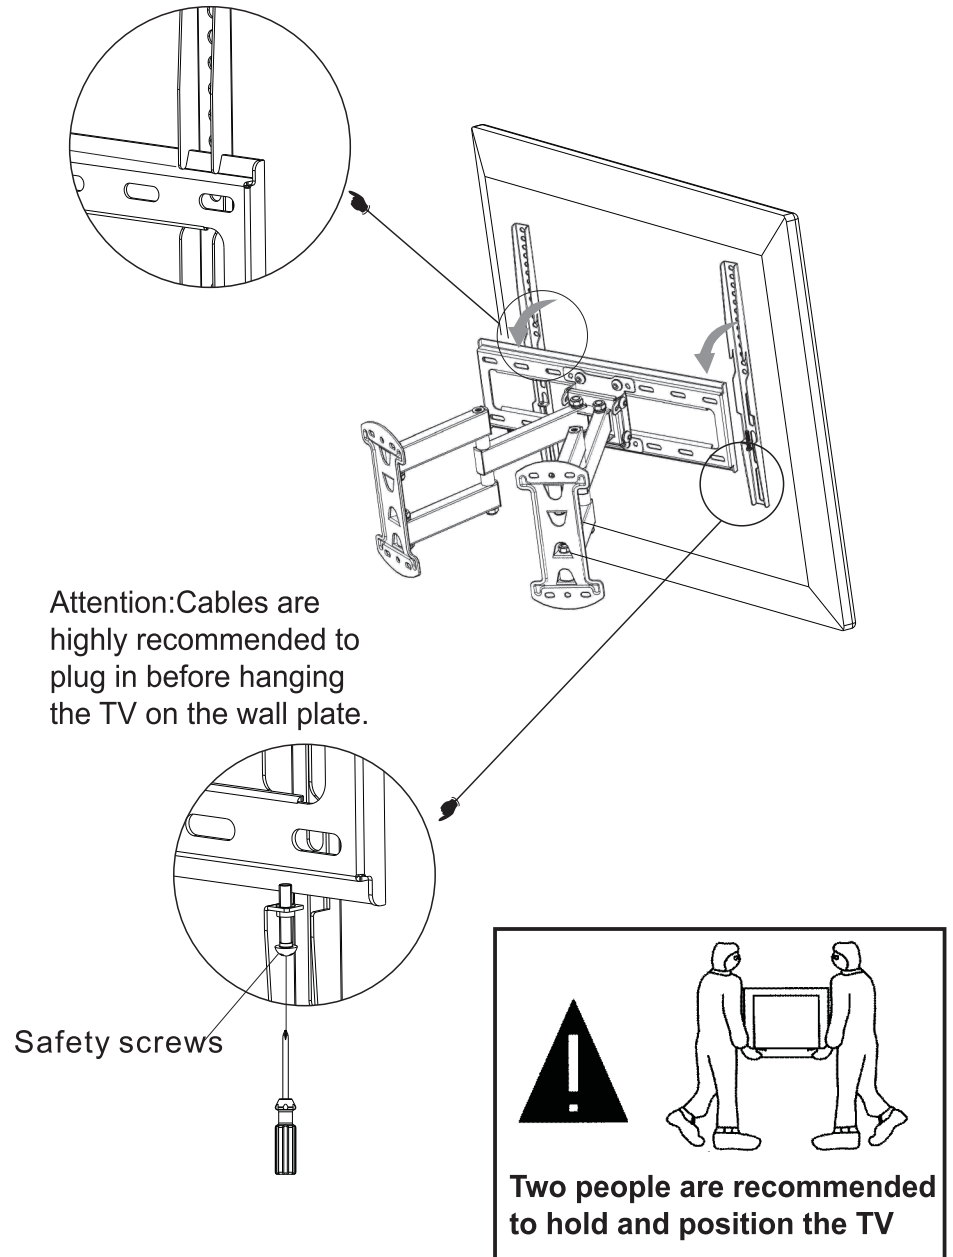


2. For TV with inset mounting holes, mount the brackets with screw/washer/spacer combination.
(spacers are highly recommended to be added, thus enlarge the space between TV and brackets for better functionality.)

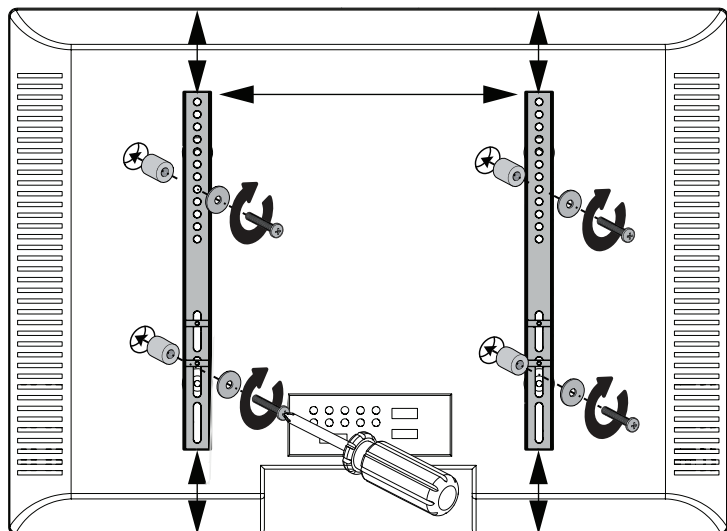

Screw/spacer/washer combination options




$h/i/j + c/g + e$




$h/i/j + c/g + e + f + f$




$h/i/j + c/g + f + f$



$h/i/j + c/g + f$





$h/i/j + c/g + e + f$

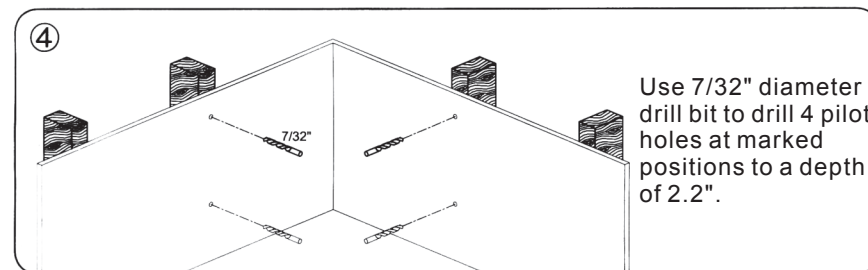


Step 1b: Wall plate installation on concrete wall

To avoid potential body injury or property damage:




1. Make sure the Bolt head on the wall plate is upward as the picture shows.
2. Solid concrete wall's thickness should be more than 4" (10mm), and the wall must be capable of supporting five times the weight of the TV plus the mount.
3. All anchors/lag bolts must be firmly tightened to prevent unwanted movement of the wall plate. Ensure the wall plate is securely fastened to the wall before continuing on to the next step.

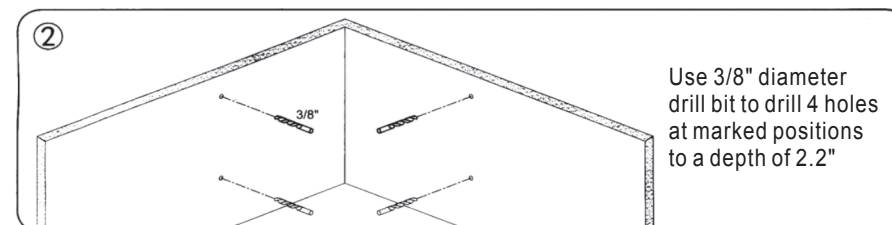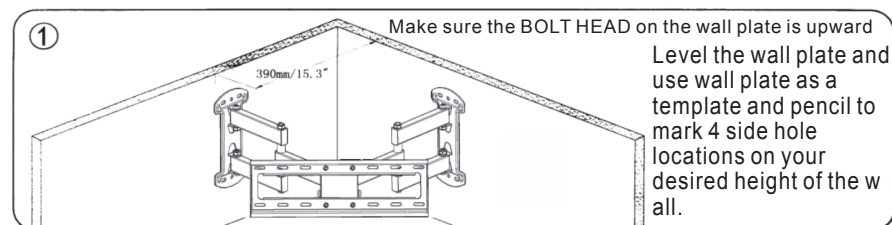

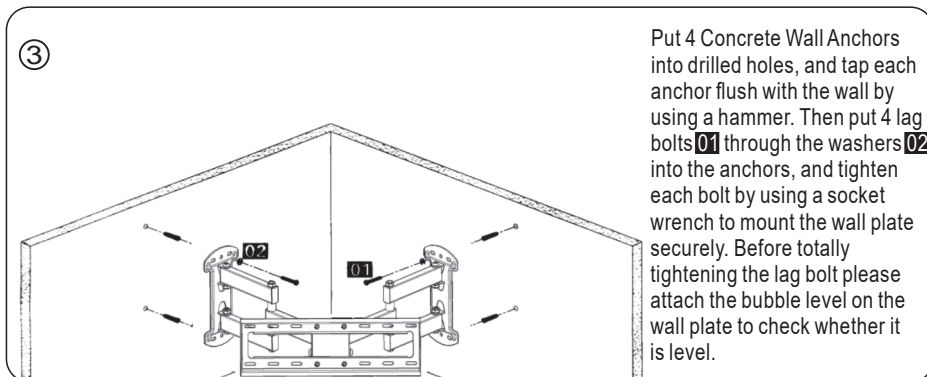


Step 2: Select TV hardware (diamter/length/combination)

1. Select TV screws diameter. Only one screw size fits your tv.

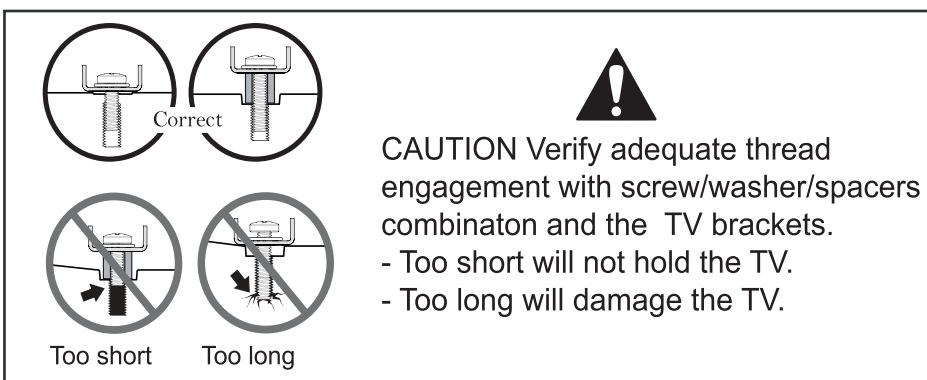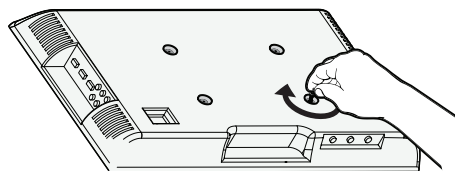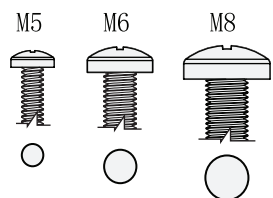

2. Bolt and spacer combination.

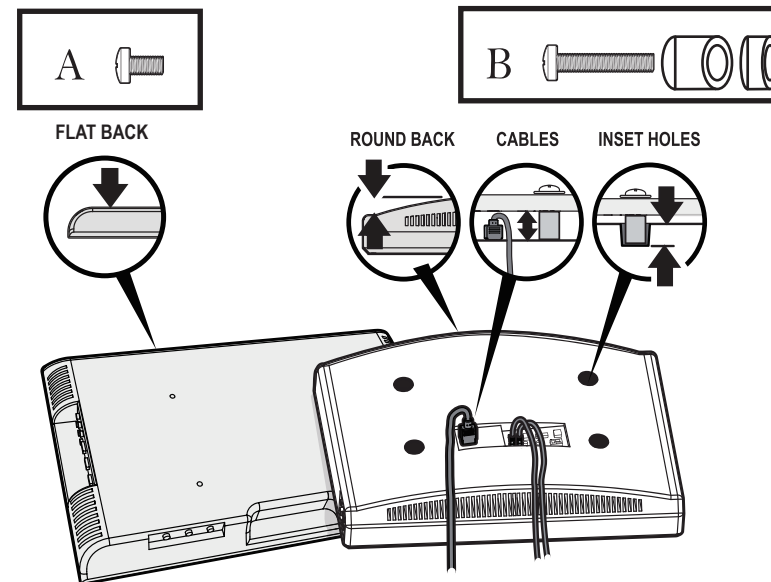

Step 3: Attach brackets to the back of TV

1. For the TV with flat back, mount the brackets with screw/washer/ spacer combination.

