


MOUNT-IT!

User Manual
SKU: MI-8035
MI-8036

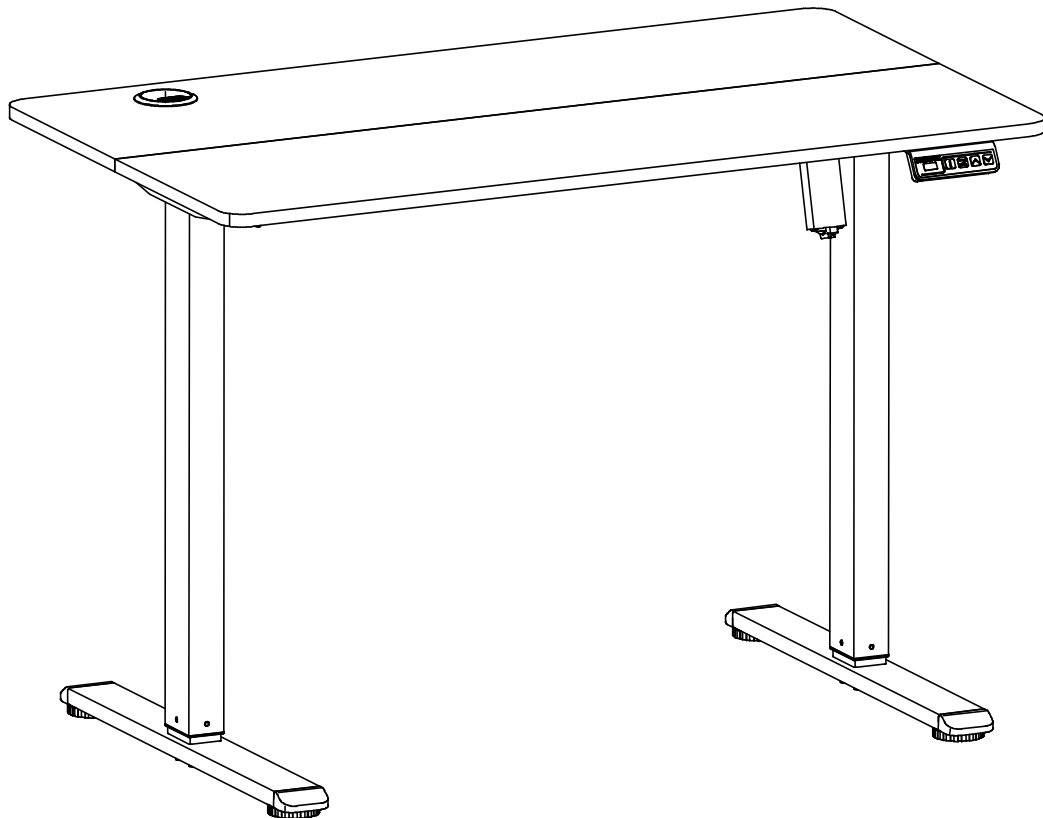

Scan this QR code for
product information, videos,
and assembly assistance.

Compact Electric Standing Desk with 40" Tabletop



HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com




(855) 925-5668



www.mount-it.com

Thank you for choosing Mount-It!

- EN**  Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact Mount-It! for assistance.
-  **CAUTION:** Use with products heavier than the rated weights indicated may result in instability causing possible injury.
- Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
 - This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
- IMPORTANT:** Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact Mount-It! for a replacement.
- MAINTENANCE:** Check that the product is secure and safe to use at regular intervals (at least every three months).
-
- DE**  Lesen Sie die gesamte Bedienungsanleitung, bevor Sie mit der Installation und Montage beginnen. Wenn Sie Fragen zur Anleitung oder Warnungen haben, wenden Sie sich bitte an Ihren örtlichen Händler.
-  **VORSICHT:** Die Verwendung mit Produkten, die schwerer als die angegebenen Nennengewichte sind, kann zu Instabilität führen und zu möglichen Verletzungen führen.
- Bitte befolgen Sie die Montageanleitung genau. Eine unsachgemäße Installation kann zu Schäden oder schweren Verletzungen führen.
 - Dieses Produkt enthält Kleinteile, die beim Verschlucken eine Erstickungsgefahr darstellen können. Halten Sie diese Gegenstände von Kindern fern.
- WICHTIG:** Stellen Sie vor der Installation sicher, dass Sie alle Teile gemäß der Komponenten-Checkliste erhalten haben. Bei beschädigten oder fehlenden Teilen, wenden Sie sich an Ihre Verkaufsstelle, um Ersatz zu erhalten.
- WARTUNG:** Überprüfen Sie das Produkt in regelmäßigen Abständen auf Sicherheit und Stabilität (am besten alle drei Monate).
-
- FR**  Lisez entièrement le guide d'utilisateur avant de commencer l'installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, veuillez contacter votre distributeur local pour une assistance.
-  **ATTENTION:** L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.
- Les supports doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
 - Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Éloignez ces pièces des enfants.
- IMPORTANT:** Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour qu'il la remplace.
- MAINTENANCE:** A intervalles réguliers (au moins tous les trois mois) vérifiez que le support est d'utilisation sûre et fiable.
-
- RU**  Перед началом установки и сборки прочитайте руководство по установке. Если у Вас возникли какие-либо вопросы относительно инструкций или предупреждений, свяжитесь с Вашим локальным распространителем для получения помощи.
-  **Внимание:** Использование продуктов, вес которых превышает указанный расчетный вес, может привести к неустойчивости и возможным травмам.
- Опоры должны быть установлены, как это показано в Монтажных инструкциях. Неправильная установка может привести к получению серьезных травм.
 - Данный продукт содержит маленькие детали, которые представляют опасность удушья при проглатывании. Такие детали необходимо хранить в недоступном для детей месте.
- ВАЖНО:** Перед установкой убедитесь, что Вы получили все детали в соответствии со списком комплектующих. Если не хватает каких-либо деталей или они поломаны, свяжитесь с Вашим местным распространителем по вопросу замены.
- ТЕХНИЧЕСКОЕ ОБСЛУЖИВАНИЕ:** Необходимо регулярно проверять (как минимум, раз в три месяца), чтобы кронштейн был зафиксирован, и его использование было безопасным.
-
- ES**  Lea todo el manual de instrucciones antes de comenzar la instalación y ensamble de la unidad. Si tiene alguna inquietud con respecto a las instrucciones o advertencias, comuníquese con su distribuidor local.
-  **PRECAUCION:** utilizar con productos de mayor peso al indicado en los límites de peso podría ocasionar inestabilidad y posibles heridas personales.
- Los soportes deben acoplarse tal como se indica en las instrucciones de ensamble. Una incorrecta instalación podría ocasionar daños y serias heridas personales.
 - Este producto contiene piezas pequeñas que representan un riesgo de asfixia. Mantenga estas piezas fuera del alcance de los niños.
- IMPORTANTE:** Asegúrese de que haya recibido todas las piezas según la lista de verificación de componentes para la instalación. Si falta alguna de las partes, o está dañada, comuníquese con su distribuidor.
- MANTENIMIENTO:** Compruebe periódicamente que el soporte esté asegurado y listo para usar (al menos cada tres meses).
-
- PT**  Leia todo o manual de instruções antes de iniciar a instalação e montagem. Se você tiver alguma dúvida sobre quaisquer uma das instruções ou avisos, por favor, entre em contato com o seu distribuidor local para assistência.
-  **ATENÇÃO:** O uso com produtos mais pesados do que os pesos indicados pode resultar em instabilidade, causando possíveis danos.
- Os suportes devem ser anexados como especificado nas instruções de montagem. A instalação incorreta pode causar danos ou sérias lesões pessoais.
 - Este produto contém pequenas peças que podem causar asfixia se ingeridas. Mantenha esses itens longe do alcance de crianças.
- IMPORTANTE:** Assegure-se que você recebeu todas as peças, de acordo com a lista de componentes, antes da instalação. Se alguma peça estiver faltando ou é defeituosa, contate o seu distribuidor local para substituição.
- MANUTENÇÃO:** Certifique-se que o suporte seja seguro e protegido para o uso em intervalos regulares (pelo menos a cada três meses).

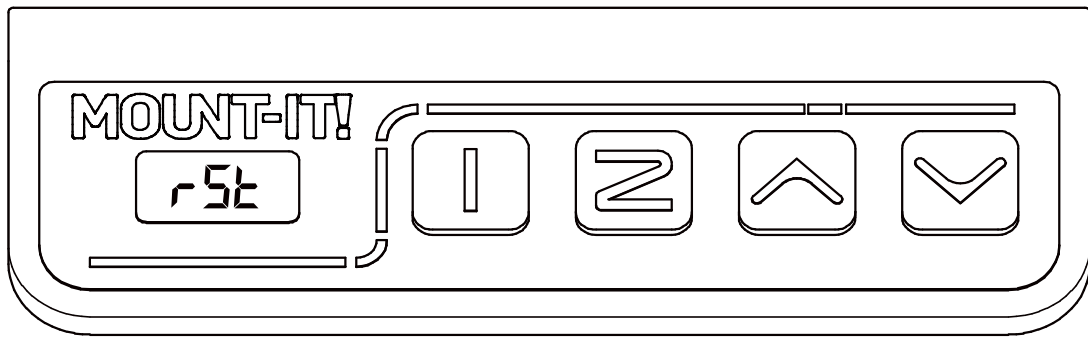

Reset Procedure

To reset the desk if it is not responding or an error code or "r5t" is displayed, press and hold the "v" button and the desktop will lower the lowest position. The lowest height setting "28.7" will be displayed on the screen, and you can release the "v" button.

Height Adjustment

Press and hold the "^" button and the desk will continuously rise until it reaches the highest position.

Press and hold the "v" button and the desk will continuously lower until it reaches the lowest position.

Release the button at any time and the desk will stop moving.

Set Memory Height Function

Set the desk to the desired height, then press and hold either the "|" or "Z" button for 3 seconds until "5-1" or "5-2" is displayed on the screen, indicating that the height setting has been saved.

Recall Saved Height Function

Push the "|" or "Z" button a single time and the desktop will automatically move to the saved height setting.

Advanced Settings

The advanced settings are for more thorough customization of your desk. If advanced customization is required follow the instructions below to access and adjust these settings.


Press and hold the "1" and "2" buttons for 20 seconds until the screen flashes to access the Settings Menu.

Press the "1" and "2" buttons briefly to switch between the 7 settings. Press "▲" or "▼" to adjust the current setting.


1. Set Minimum Height: Set your preferred minimum height setting that the desk will not lower past.
2. Set Maximum Height: Set your preferred maximum height setting that the desk will not raise past.
3. Set Anti-Collision Sensitivity when Raising the Desk: Sensitivity settings from 1-0 to 1-9, where 1-0 is the minimum (disabled) setting, and 1-9 is the maximum sensitivity setting.
4. Set Anti-Collision Sensitivity when Lowering the Desk: Sensitivity settings from 2-0 to 2-9, where 2-0 is the minimum (disabled) setting, and 2-9 is the maximum sensitivity setting.
5. Height Units Display – Decimal Format: F-0 will display all heights without a decimal. F-1 will display all heights with a decimal.
6. Height Units Display – Metric/Imperial Format: L-0 will display all heights in metric. L-1 will display all heights in Imperial/US Standard.

Press and hold the "1" and "2" buttons for more than 5 seconds until "888" is displayed on the screen, and all current settings will be saved.

PACKAGE CONTENTS




A (×1)
Desktop (Rear)



B (×1)
Desktop (Front)




C (×1)
Leg



D (×1)
Motorized Leg



E (×2)
Side Plates




F (×2)
Feet




G (×1)
Crossbar



H (×1)
Transmission Rod




I (×1)
Power Adapter



J (×1)
Control Panel



K (×1)
Grommet Cover



L (×5)
Desktop Connectors



M (×4)
Wooden Dowels

HARDWARE CONTENTS



N (×12)
M6×12 Bolt



O (×8)
M6×35 Bolt




P (×14)
M6×12 Bolt




Q (×4)
M6×12 Bolt



R (×1)
4mm Allen Key



S (×1)
5mm Allen Key



T (×3)
Cable Clip

EXTRA PARTS



N (×1)
M6×12 Bolt




O (×1)
M6×35 Bolt



P (×1)
M6×12 Bolt




Q (×1)
M6×12 Bolt





T (×1)
Cable Clip

ASSEMBLY STEPS

Installation Tips




Lay a mat or blanket beneath the desk to protect the floor and desktop during assembly.




STEP 1 Assemble the Tabletop

- Connect the two halves of the Tabletop (#A, B) together. Insert the Wooden Dowels (#M) into the holes between the two halves, then press the tabletop pieces firmly together until they are fully closed and level with each other.

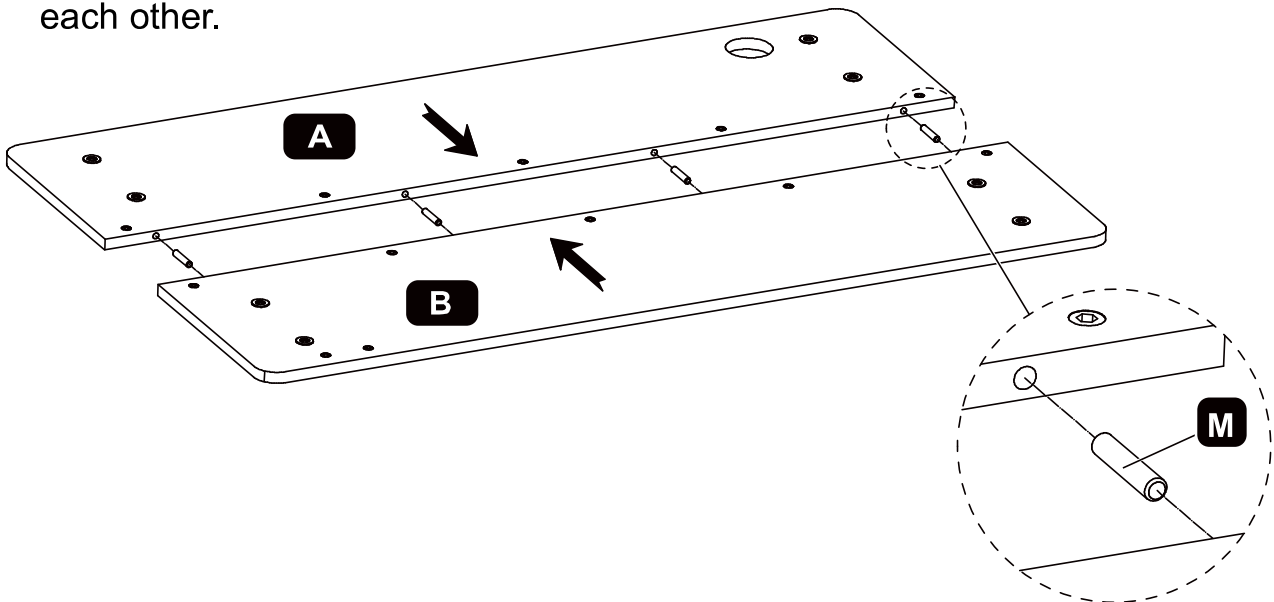


- Secure the tabletop halves together using the Tabletop Connectors (#L), the Countersunk Bolts (#P), and the M4 Hex Wrench (#R). Adjust the tightness of the Bolts (#P) to help level the two sides if needed. Do not overtighten.

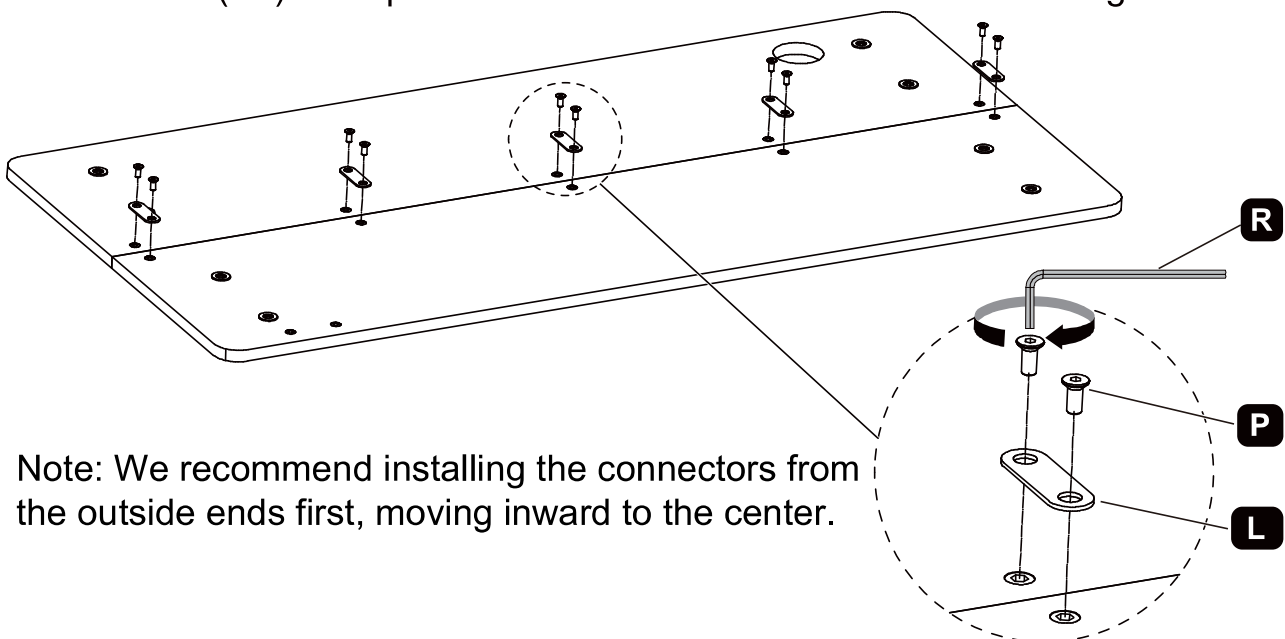

STEP 2 Attach the Crossbar


Attach the Crossbar (#G) to the two Legs (#C, D) as shown using the Bolts (#Q) and M5 Hex Wrench (#S).

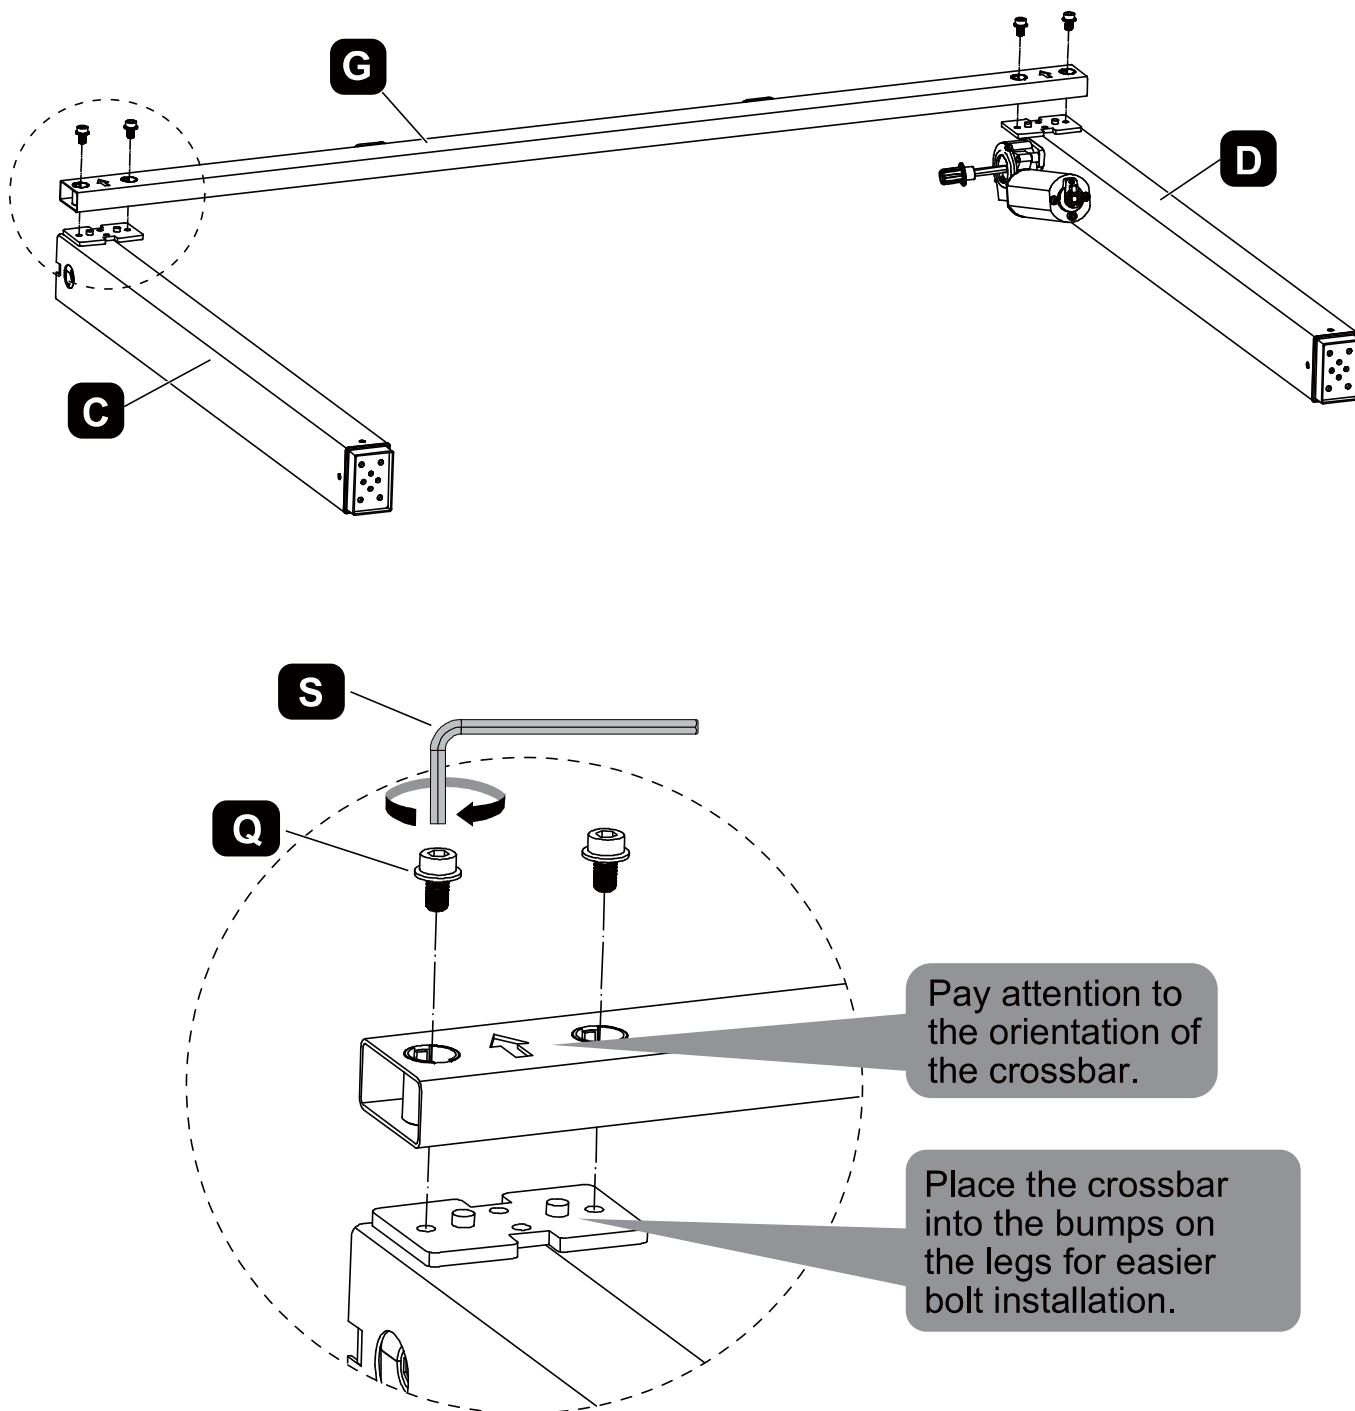

STEP 3 Attach the Side Plates


Attach the Side Plates (#E) to the sides of the Legs using the Bolts (#P) and M4 Hex Wrench (#R).

Pay attention to the orientation of the Plates (#E).

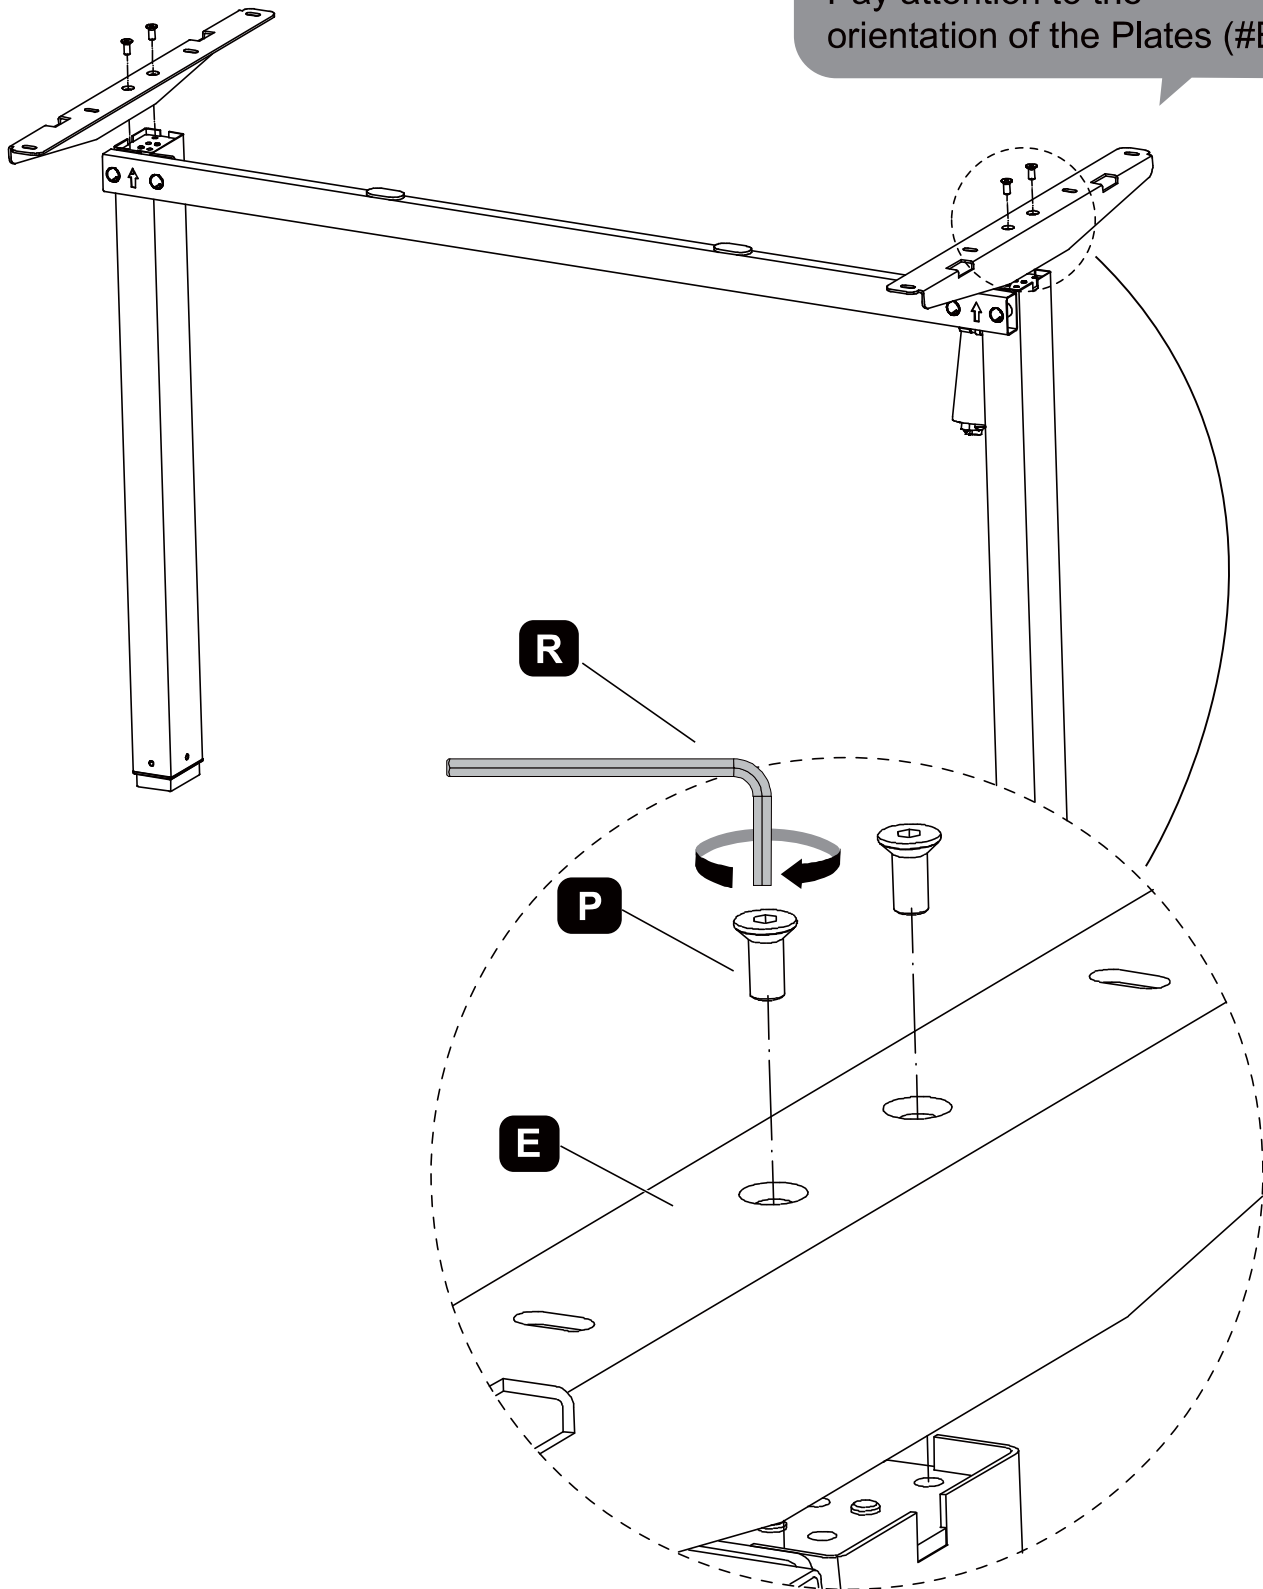

STEP 4 Attach the Feet


Attach the Feet (#F) to the bottom of the Legs using the Bolts (#O) and the M5 Hex Wrench (#S).

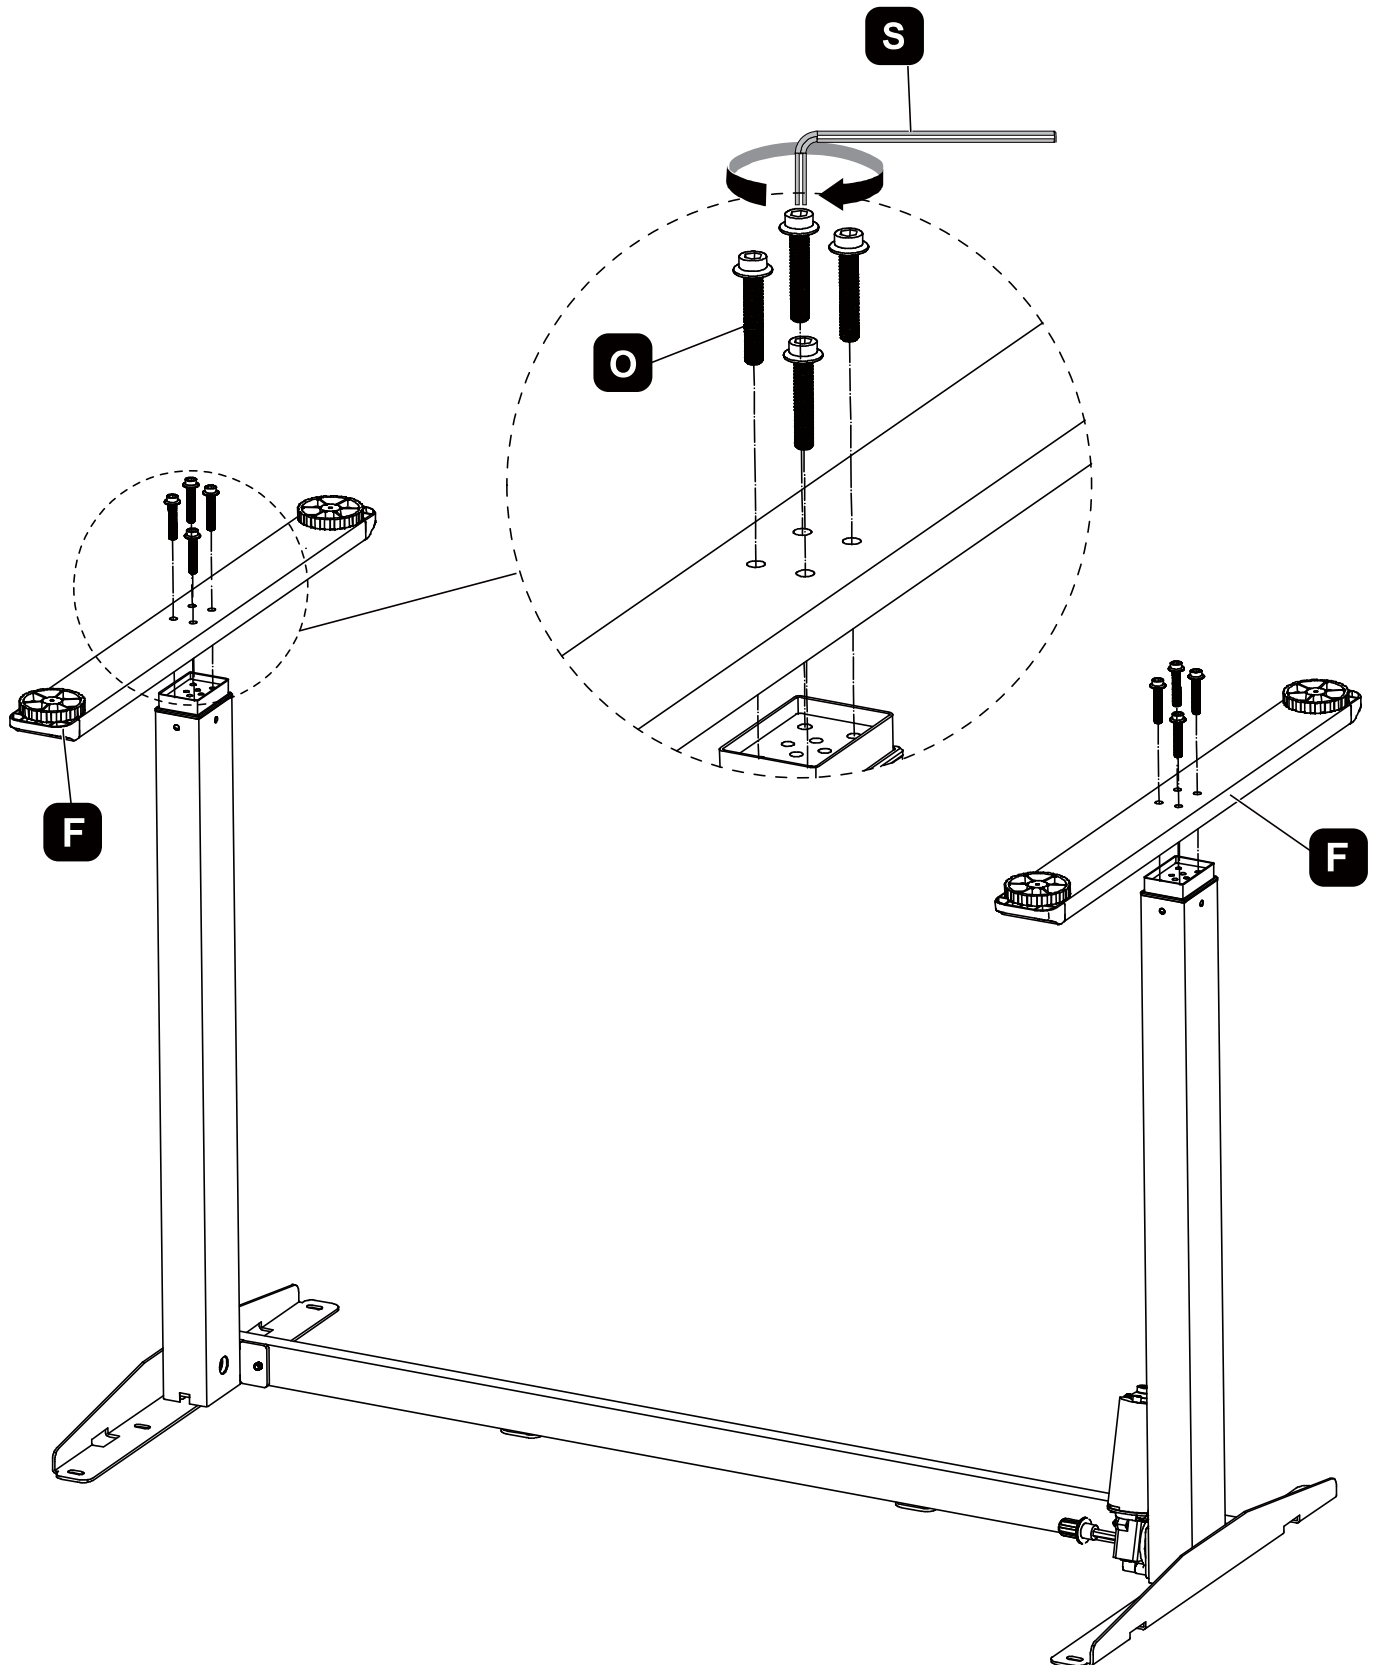

STEP 5-1 Attach the Transmission Rod

⚠ WARNING: Ensure that the legs are at the same level!


- 1** Loosen the knob on the Transmission Rod (#H) to extend the rod.



2


Insert the Transmission Rod (#H) into the Leg (#C).

Important: Make sure the stopper is fully inserted into the hole on the leg.

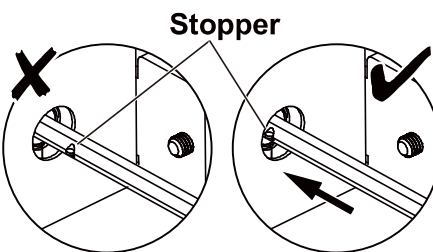


Insert the large end of the rod into the attachment on the Motorized Leg (#D).


3

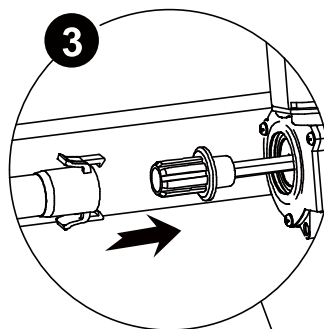

4

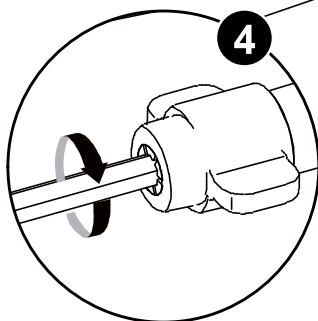

Rotate the knob until it is fully tightened

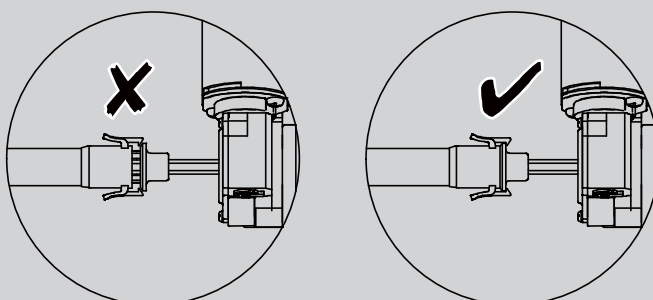


Important: Assembled in place

STEP 5-2 Adjust the Height of the Legs

⚠ WARNING: Ensure that the legs are at the same level!


If the height of the left and right legs do not match, adjust the height of the Leg (#C)

1. Detach the Transmission Rod from the Motorized Leg (#D)
2. Rotate the rod to raise or lower the height of the Leg (#C)
3. Reattach and tighten the rod to the Motorized Leg (#D)

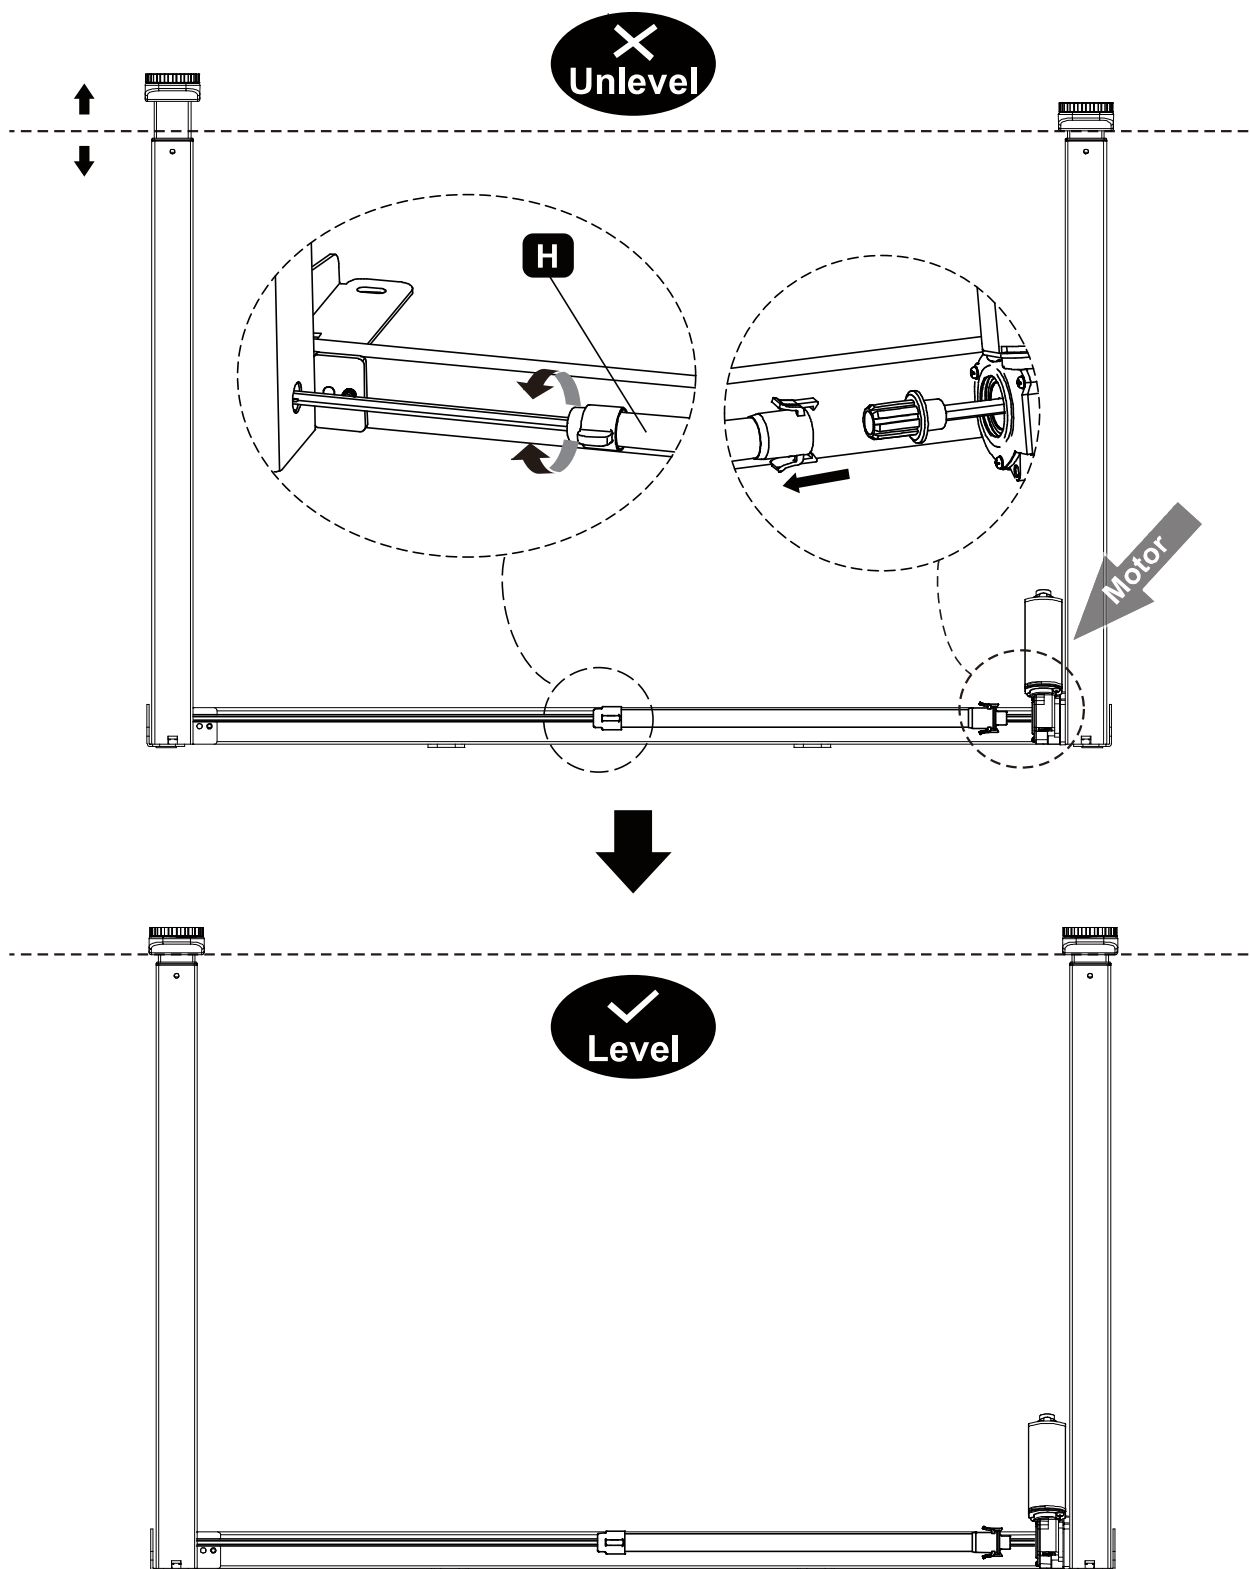

STEP 6 Attach the Control Panel

- Attach the Control Panel (#J) to the desktop using the Bolts (#N) and tighten using the Hex Wrench (#R)

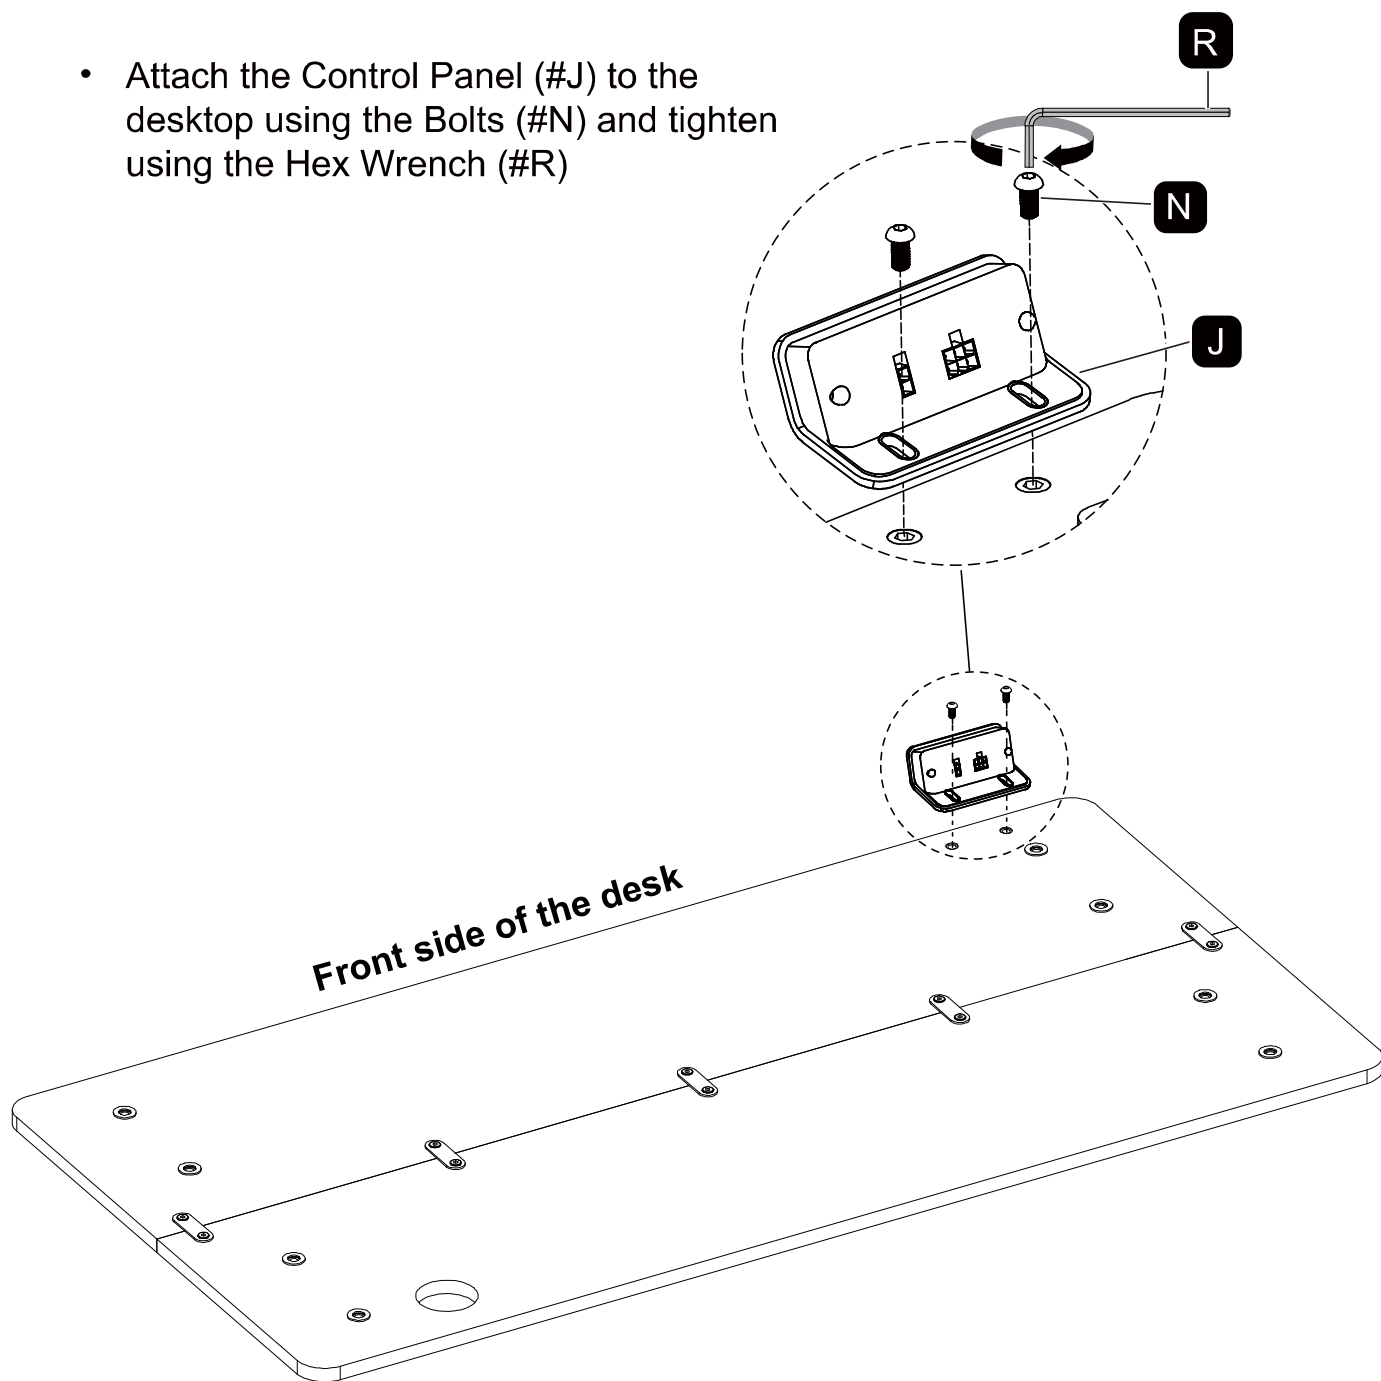


STEP 7 Attach the Frame to the Desktop

Note 1: It is recommended to align the bolts first, then tighten them all evenly.


Note 2: Install the frame with the motorized leg on the same side as the control panel.

- Carefully place the frame upside down on the desktop. Align the holes on the frame with the holes on the tabletop, then secure them together using the Bolts (#N).

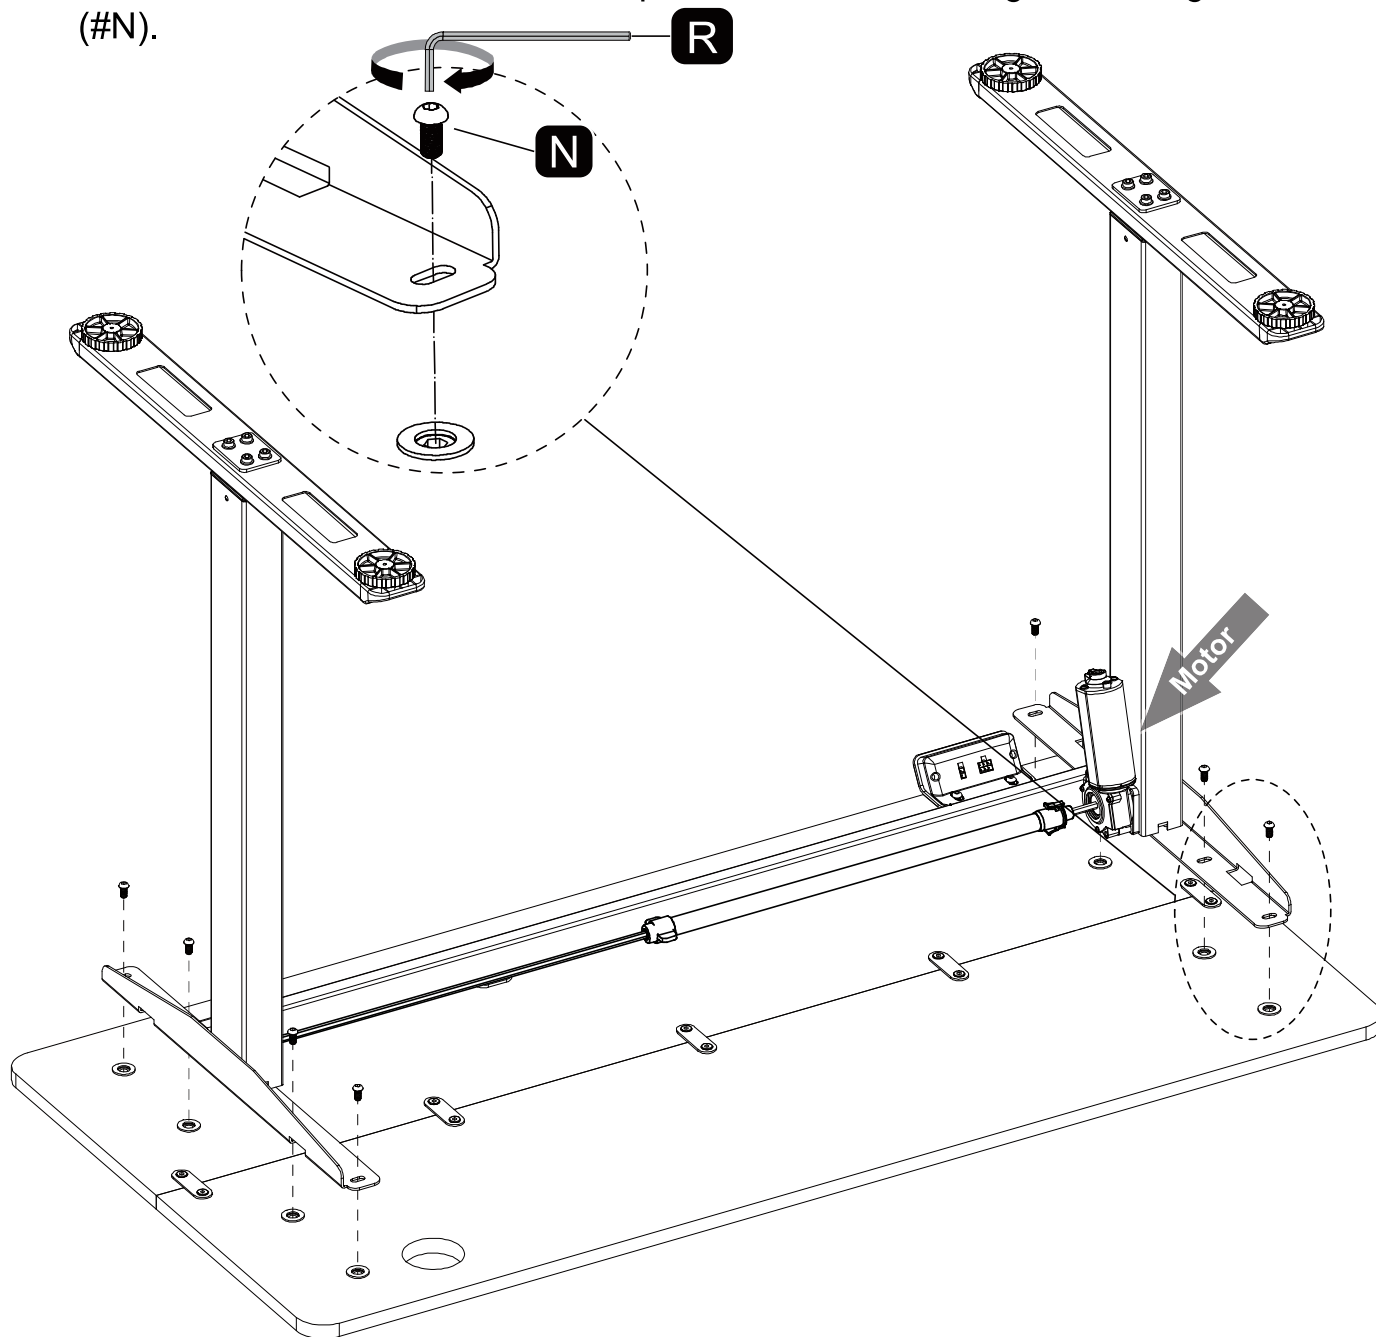


STEP 8 Connect the Power Cables


1. Connect the cables from the Motorized Leg (#D) to the Control Panel (#J).
2. Connect the cables from the Power Adapter (#D) to the Control Panel (#J).

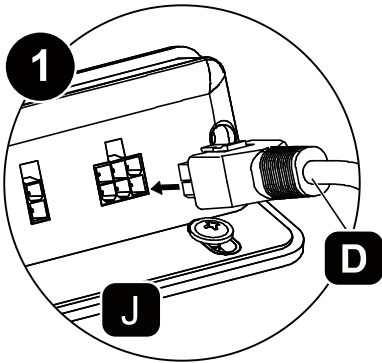

Motor to
control panel

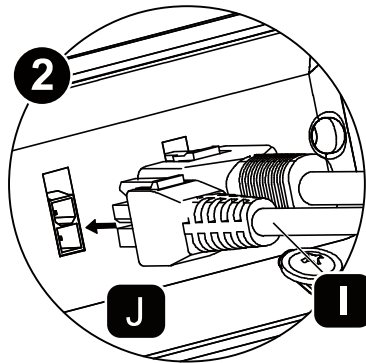


Power adapter
to controller

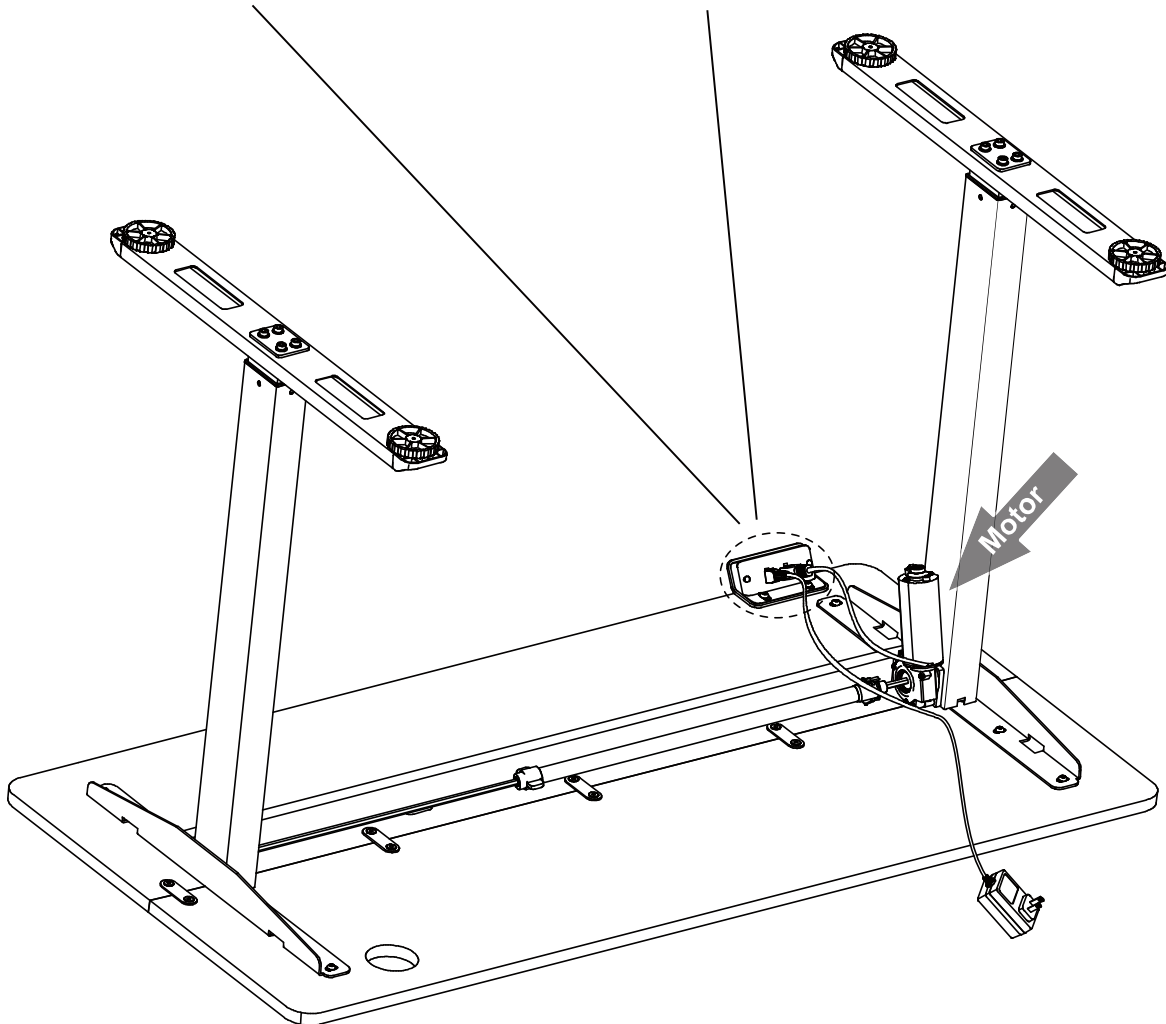


STEP 9 Install the Cable Management Clips


Install the Cable Management Clips (#T) in the approximate locations shown here.




Peel off
the backing



Press them
onto the table




Insert cables and
snap the clip down

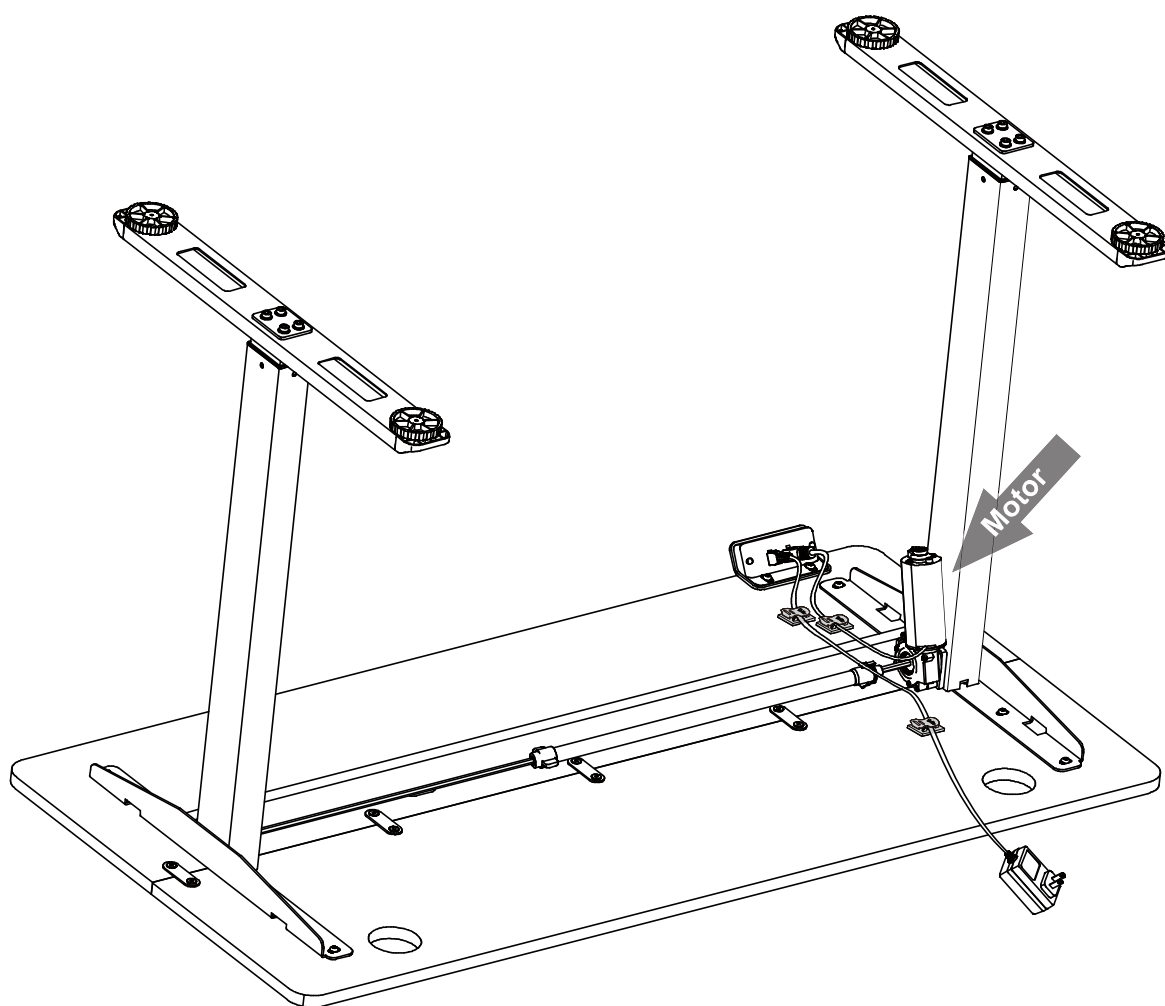

STEP 10 Finish Assembly


- Turn the desk upright and insert the Grommet Cover (#K) into the grommet hole.
- Connect the power adapter to an outlet. The power indicator light on the adapter should be on, and the control panel will power on.

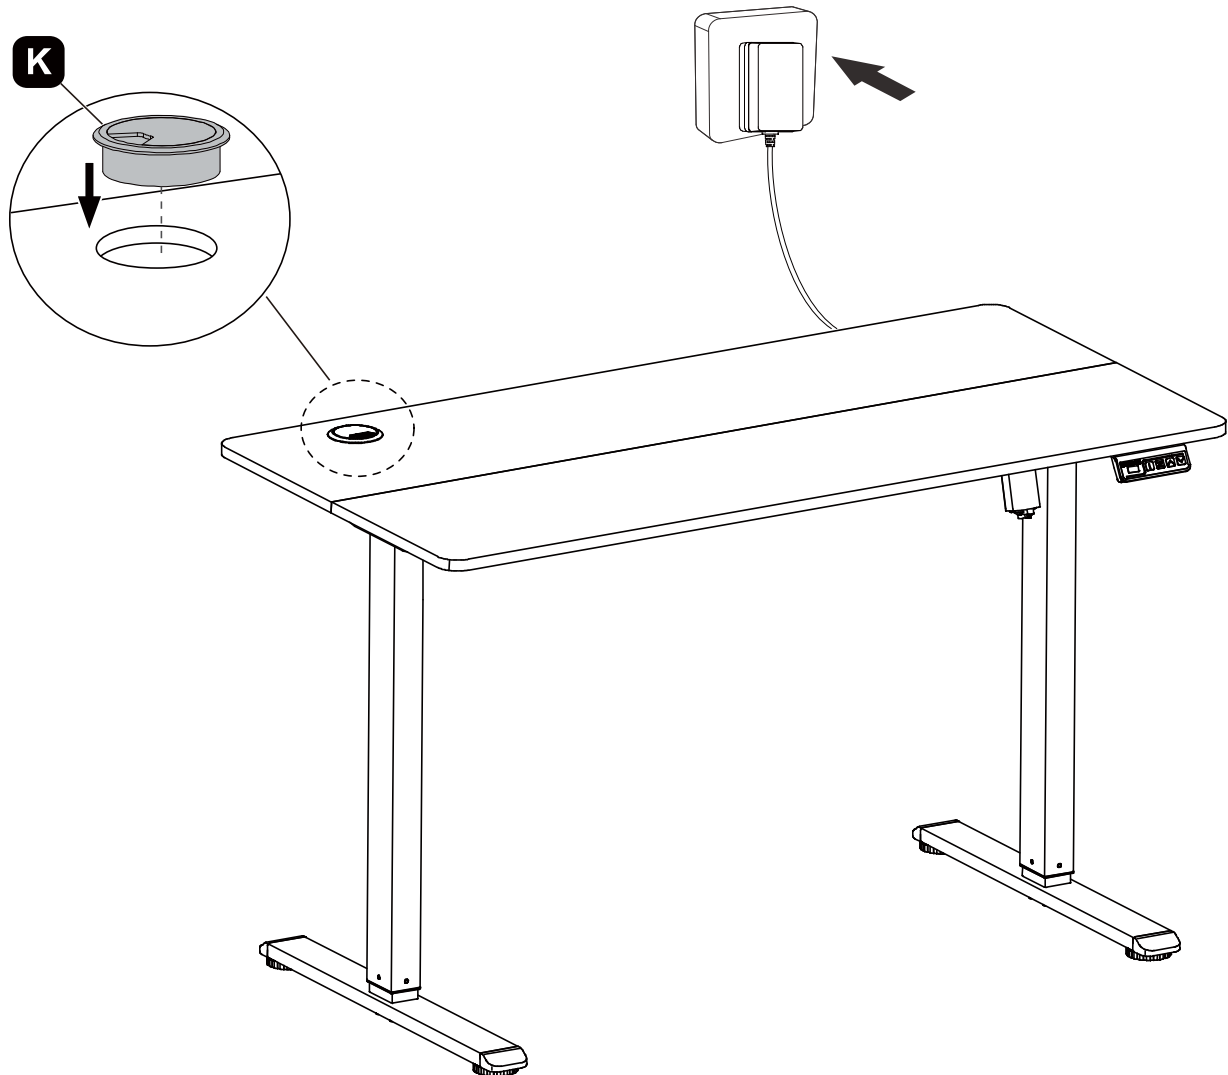

Note:

Level the tabletop by tightening or loosening the foot pads as needed.

Dimensions

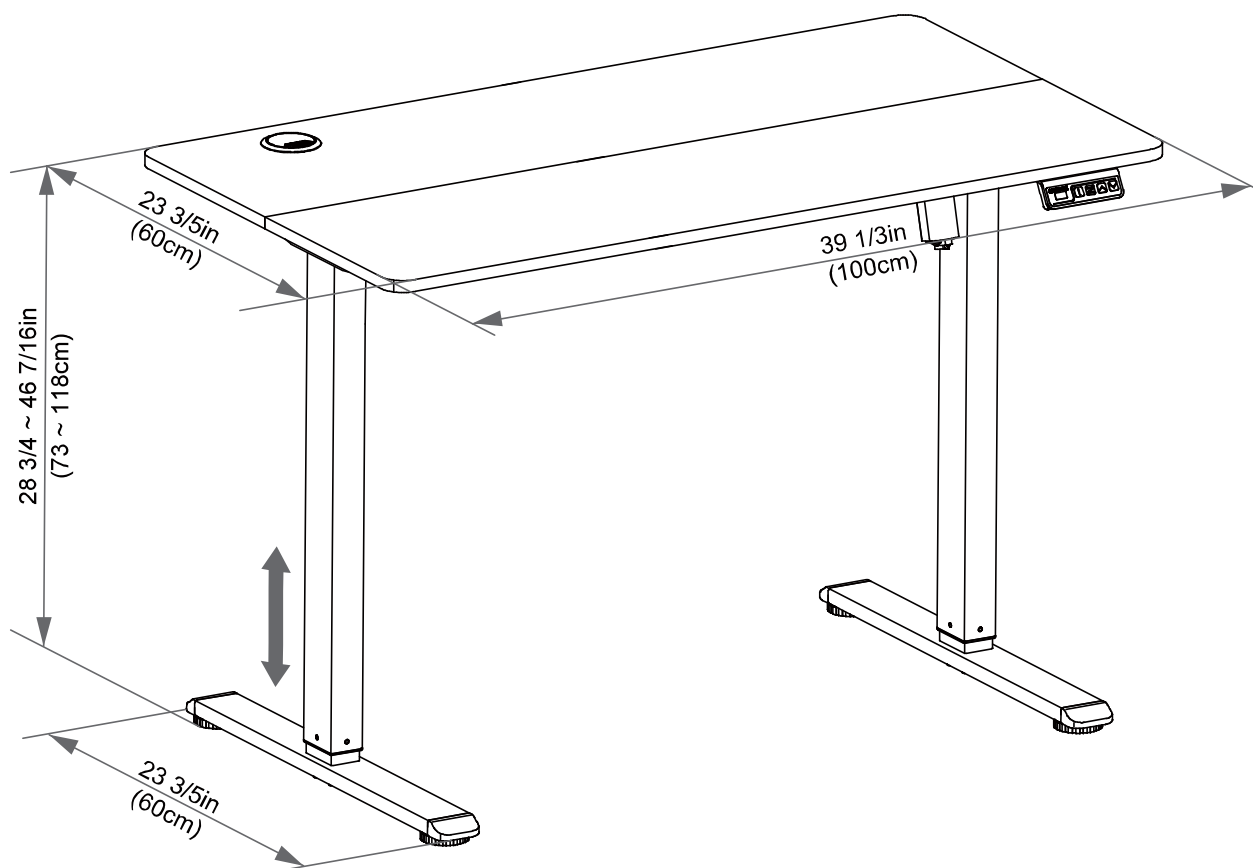

Power Input
110V-240V



Speed
0.78 in/s



Motion Noise
<55dB



Load Capability
154 lbs / 70 kg

Warnings




Do not exceed desk weight limit.



Keep area of vertical motion free of obstacles.



Keep weight on desk balanced for correct operation and longer life of components.

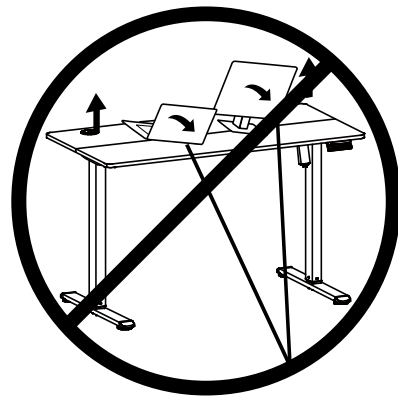

Leave enough slack in cables to allow for full range of vertical motion.

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.

Available by phone **Monday - Friday from 5:00am to 5:00pm PST.**

Chat live with an agent on our website!



support@mount-it.com



(855) 925-5668



www.mount-it.com