




Scan this QR code for
product information, videos,
and assembly assistance.

HITCH-MOUNTED BIKE RACK FOR CARS

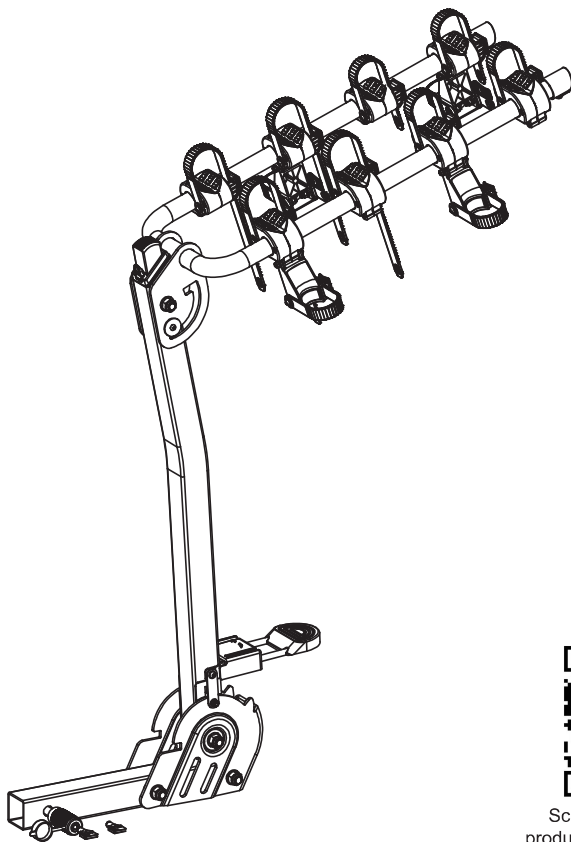

HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com



(855) 925-5668



www.mount-it.com

Thank you for choosing Mount-It!

CAUTIONS

- Read and follow instructions carefully. Save owner's manual for future reference or parts information. Ensure that any other users of the bicycle carrier are familiar with their content.
- Drive slowly over speed bumps, 5 to 10 mph max speed.
- It's the end user's responsibility to ensure that use of this product meets all local and state laws.
- When cleaning vehicle and rack, use only water soluble cleaners. Do not take rack through car wash.
- Make sure bike tires are not directly behind exhaust pipe.
- Rack must be installed directly into vehicle hitch receiver. Do not modify the hitch receiver or use hitch extenders.
- Do not mount to any type of trailer or RV including Class B vehicles.
- Prior to usage on the road, remove all loose parts from bicycle, including (but not limited to) child seat, basket, lock, light, pump, etc.
- This carrier is not recommended for off-road use or for use at speed exceeding 80 mph (130 km/h).
- The handling characteristics of a vehicle will change when a rear bicycles carrier is fitted and especially when it is loaded (in particular crosswind sensitivity, handling on bends and braking). Driving techniques should be altered to allow for these changes, reduce speed, especially on bends and allowing for longer braking distances.
- The vehicle's total length increases when the bike carrier is attached. The bikes themselves may increase the vehicle's total width and height. Take care when reversing and/or entering garages or ferries, etc.
- Remove carrier from vehicle when not in use.
- This carrier is constructed to carry standard-bike-frames. It is not intended for use with tandem or recumbent bicycles.
- Replace any mounting strap at the first sign of wear.
- Tighten straps regularly during the journey.
- Vehicle should be in good condition in the area at which the hitch is located.
- Do not exceed maximum load capacity of carrier. Secure properly and adjust for even load distribution, loading the heaviest/biggest bike first and closest to the vehicle.
- This carrier is not compatible with travel trailers/caravans, 5th wheels, or any bumper mounted hitch receiver.
- Remove carrier from vehicle before using a car wash.

RECOMMENDED RACK MAINTENANCE & CARE INSTRUCTIONS

Each use:


- Wipe down trunk rack feet
- Avoid ground contact with trunk rack feet
- Check straps for signs of wear
- Check bike cradles and wheel scoops
- Check for loose bolts
- Periodically tighten straps during long journeys, check hitch and bolt connections.

Every 90 days actions:

- Lubricate locks if applicable (use wet, oil-based lubricant;)
- Grease hitch bolt threads
- Check for scratches in paint



Mount and Accessories

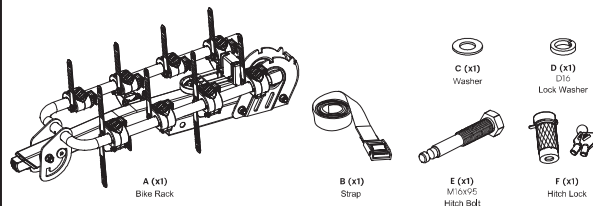


Check carefully to make sure there are no missing or defective parts. Some hardware provided may not be used. Use the correct mounting hardware suitable for your installation.

CHOKING HAZARD. Package includes small parts.

Not for children under 3 years. Adult supervision is required.

Missing Parts? Call us at (855) 925-5668 and we will ship replacement parts free of charge.

DIMENSIONS & WEIGHT CAPACITY


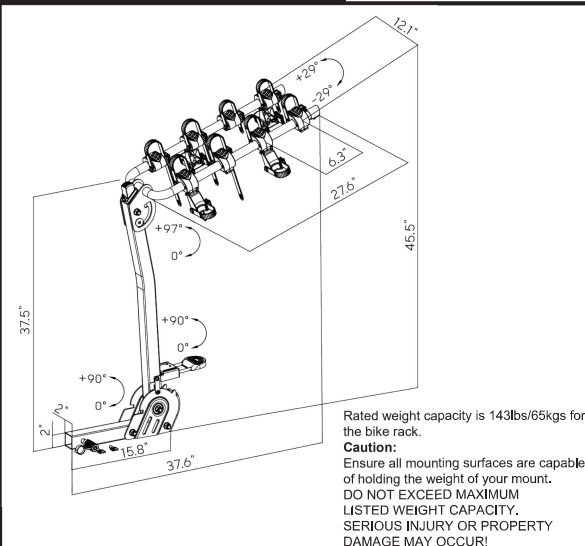


Step 1

Unfold the Bike Rack

- Pull the foot pedal down by hand until it is lowered.
- While holding the upper portion of the Bike Rack (#A), press the foot pedal downward. At the same time, have a second person pull the Shank down until the rack is fully unfolded.

Before installing make sure it is in good condition.

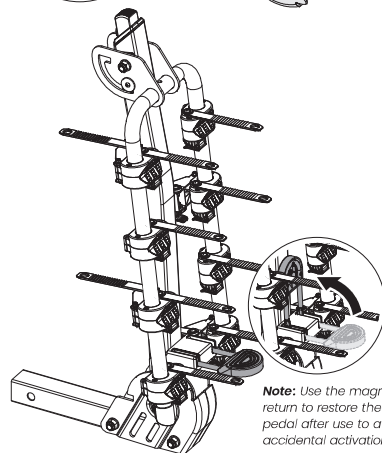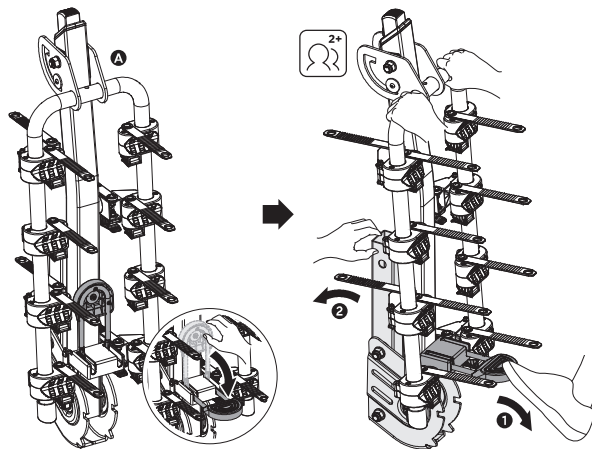


Note: Use the magnetic return to restore the foot pedal after use to avoid accidental activation.

Step 2



Install the Bike Rack into the Vehicle Hitch

- Slide the Shank of the Bike Rack (#A) into the vehicle hitch receiver.
- Align the holes on the Shank with the holes on the hitch receiver.
- Place the Lock Washer (#D) and Washer (#C) onto the Hitch Bolt (#E), then insert the Hitch Bolt (#E) through the aligned holes.
- Tighten the Hitch Bolt (#E) using a wrench until the Bike Rack (#A) is fully secured.
- Insert the key into the Hitch Lock (#F), press inward, and turn clockwise half a turn to unlock.
- Press the Hitch Lock (#F) onto the end of the Hitch Bolt (#E), then press the key inward, turn counterclockwise half a turn, and remove the key.

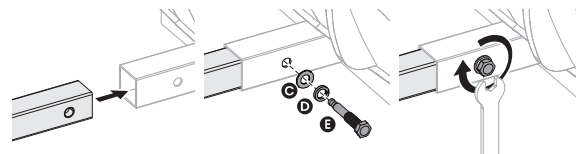

Press the key gently inward and turn clockwise half a turn.

Press the key gently inward, turn counterclockwise half a turn, and remove.

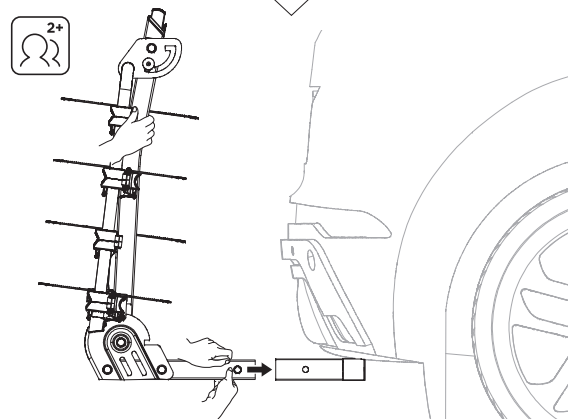



Step 3

Unfold the Support Arms

- Pull the tab downward to unlock the release button.
- Press the button downward to release the support arms.
- Pull the support arms upward until they are fully extended.


Note: Always hold the support arms of the Bike Rack (#A) to prevent them from dropping suddenly.

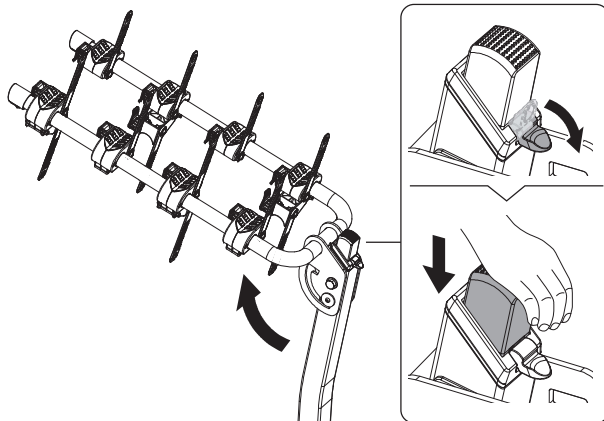

Step 4

Prepare the Frame Cradles


- Flip the latch upward to lock the release button.
- Unfold each of the frame cradles downward until fully open.

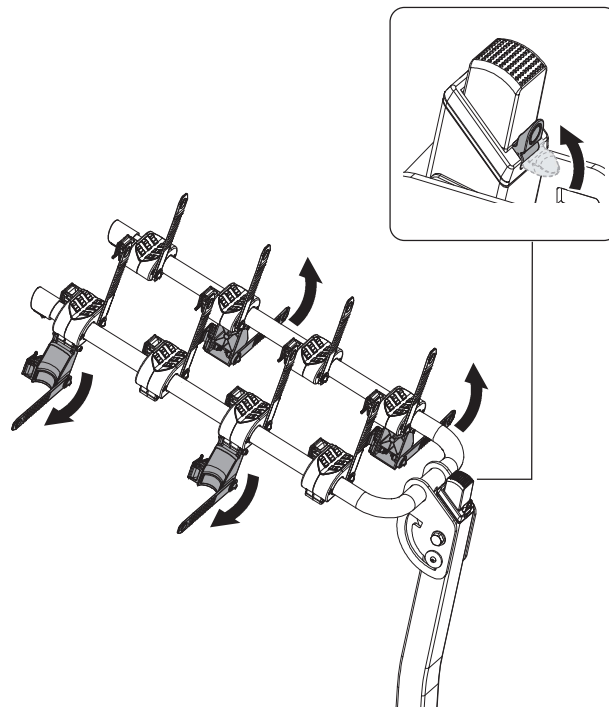

Step 5

Load and Secure the Bikes


- Load the largest or heaviest bike first onto the frame cradles closest to the vehicle.
- Load each additional bike onto the Bike Rack with the orientation alternating from the bike before it.
- Wrap the latching straps around each bike frame and feed them through the latches as shown.
- Pull each latching strap tight until the bike is firmly secured to the frame cradles.

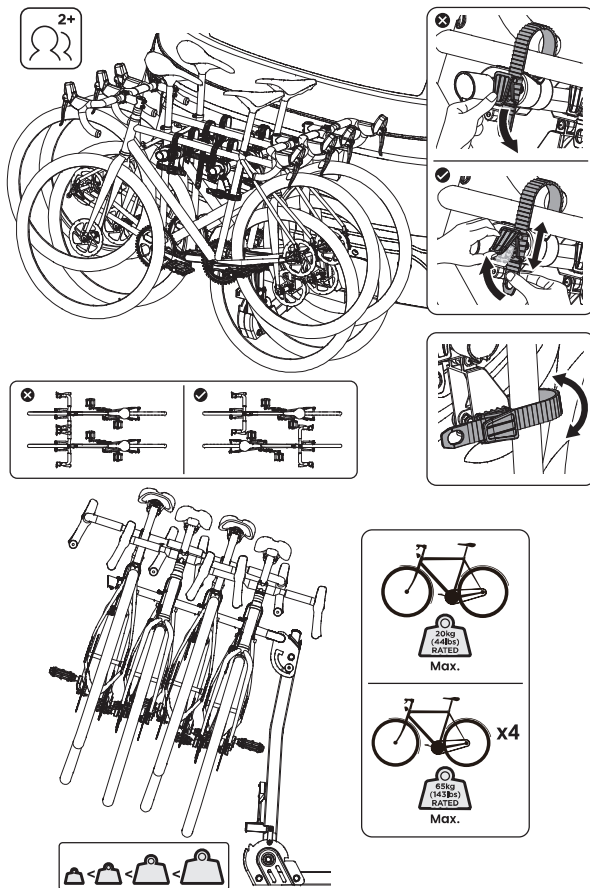

Step 6

Secure the Bikes with the Strap


- Wrap the Strap (#B) around all loaded bikes as shown.
- Feed the end of the strap through the bottom of the latch and out through the top.
- Pull the strap tight until all bikes are firmly secured together and tie off any excess length of the to prevent it from flapping while driving.

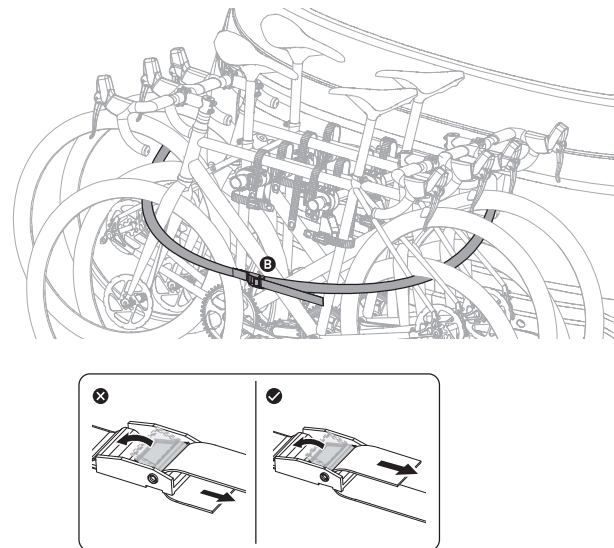



Step 7

Additional Information

- Once the rack is mounted to the hitch, it can be tilted forward to allow access to the hatch or tailgate of the vehicle without removing the rack.
- Before and during each use, check all connections and ensure that the mount is in good condition.

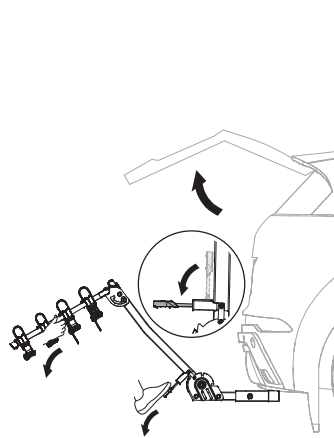


Note: For safety, when operating alone, you need to apply at least 65 kg (143 lbs) of force; otherwise, two people are needed.



Push down the tab to unlock, then press the button to fold the support arms when not in use.

Note: Always hold the support arms while pressing the button to prevent sudden drop.



Note: If the button is stuck, gently lift the support arms to allow smooth pressing.

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.



support@mount-it.com

Available by phone **Monday - Friday from 5:00am to 5:00pm** PST.



(855) 925-5668

Chat live with an agent on our website!



www.mount-it.com