




Scan this QR code for  
product information, videos,  
and assembly assistance.

## LAPTOP MOUNT WITH POLE & GAS SPRING ARM

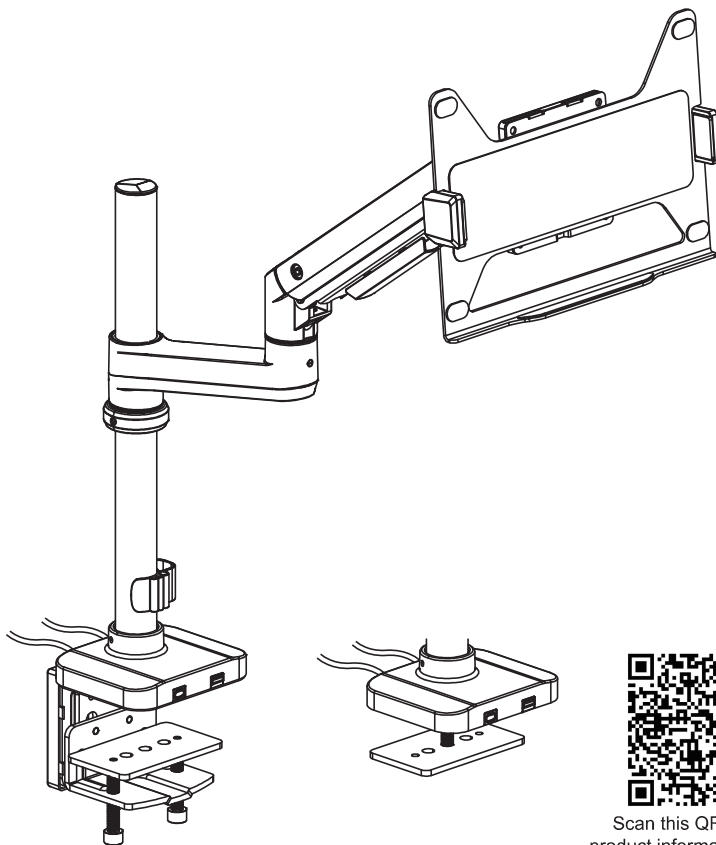

**HAVE QUESTIONS?**

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com



(855) 925-5668



www.mount-it.com

**EN** Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact our Customer Service Department.

**CAUTION:** Use with products heavier than the rated weights indicated may result in inability to safely move product. Injury, property damage or death may result.

- Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury. Safety and proper tools must be used. The product should be installed by a professional.
- This product is designed to be installed on solid concrete walls, masonry walls or wood stud walls.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and **DO NOT OVER TIGHTEN** the screws.
- This product contains small parts that could be a choking hazard if swallowed. Keep these items away from children.
- Do not use. Intended for indoor use only. Do not use this product outdoors.

**IMPORTANT:** Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact MountIt! for replacement.

**MAINTENANCE:** Check that the product is secure and safe to use at regular intervals (at least every three months).

Lesen Sie die gesamte Bedienungsanleitung, bevor Sie mit der Installation und Montage beginnen. Wenn Sie Fragen zur Anleitung oder Warnungen haben, wenden Sie sich bitte an Ihren örtlichen Händler.

- Die Installation ist nur für Personen vorgesehen, die sicherer als die angegebenen Nennwerte sind, kann zu Installation führen und zu möglichen Verletzungen führen.
- Diese betriebsfähige Installation muss geerdet werden. Eine unzureichende Installation kann zu Schäden oder schweren Verletzungen führen.
- Eine ordnungsgemäße Installation und Wartung ist erforderlich, um einen sicheren und zuverlässigen Betrieb zu gewährleisten. Es ist nur von Fachleuten anzuwenden.
- Dieses Produkt ist auf massiven Betonwänden oder Mauerwerkswänden zu montieren.
- Stellen Sie sicher, dass die Aufhängung des Gewichtssatzes gemäß und alle angeschlossenen Wannen und Komponenten sicher ist.
- Verwenden Sie die mitgelieferten Befestigungsmittel und Befestigungsschrauben und Befestigungsmittel, um das Produkt sicher zu montieren.
- Dieses Produkt enthält Klebstoffe, die beim Verschieben eine Erstreaktion hervorrufen darstellen können. Halten Sie diese Gegenstände von Kindern fern.
- Wenn Sie das Produkt verwenden, lesen Sie die Bedienungsanleitung des Produkts und befolgen Sie die Anweisungen.

**WICHTIG:** Stellen Sie vor der Installation sicher, dass Sie alle Teile gemäß der Komponenten-Checkliste erhalten haben. Bei beschädigten oder fehlenden Teilen, wenden Sie sich an den Verkaufsstellen, um Ersatz zu erhalten.

**WARNUNG:** Überprüfen Sie die Installation regelmäßig auf Sicherheit und Stabilität (am besten alle sechs Monate).

**FR**  Lisez entièrement le guide d'utils avant de commencer l'installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, veuillez contacter votre distributeur local pour une assistance.

**ATTENTION:** L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.

- Les supports doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
- Un ancrage de sécurité et les outils appropriés doivent être utilisés. Ce produit devrait être installé uniquement par des professionnels.

- Ce produit est conçu pour être installé sur des murs avec poteaux en bois, des murs en béton motté ou murs en brique.
- Assurez-vous que les surfaces de soutien supportent en sécurité la poids combiné des équipements et de tous les matériaux et composants associés, y compris les vis de montage fournies et NE SÉPARATEMENT PAS TROP les vis de montage.
- Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Éloignez ces pièces des enfants.
- Ce produit est prévu uniquement pour une utilisation à l'intérieur. L'utilisation de ce produit à l'extérieur peut entraîner une détérioration du produit et des blessures aux utilisateurs.

**IMPORTANT:** Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour la remplacer.

**ATTENTION:** À intervalles réguliers (au maximum une fois par semaine) vérifiez que le support est d'utilisation sûr et fiable.

[illegible]

**ТЕХНИЧЕСКОЕ ОБСЛУЖИВАНИЕ:** Необходимо регулярно проверять (хотя минимум, раз в три месяца), чтобы хроматин был зафиксирован, и его использование было безопасным.

**ES** Lea todo el manual de instrucciones antes de comenzar la instalación y ensamblaje de la unidad. Si tiene alguna inquietud con respecto a las instrucciones o advertencias, comuníquese con su distribuidor local.

- Los recipientes deben colocarse tal como se indica en las instrucciones de ensamblaje. Una incorrecta instalación podría ocasionar daños y/o lesiones personales.
- Utilice las herramientas y equipo de seguridad adecuados. Este producto total debe ser instalado por profesionales.
- Este producto está diseñado para instalaciones en paredes de madera sólida, concreto sólido o bloques.
- Asegúrese de que la superficie de fijación se realiza de manera segura al peso total del equipo y todos sus componentes y hardware.
- Utilice los tornillos de ensamble suministrados y NO aplique demasiada tensión a los tornillos.
- Este producto contiene piezas pequeñas que representan un riesgo de asfixia. Mantenga estas piezas fuera del alcance de los niños.

**IMPORTANTE:** Asegúrese de que haya recibido todas las piezas según la lista de verificación de componentes para la instalación. Si falta alguna de las partes, o está dañada, comuníquese con el distribuidor.

**PT**  Leia todo o manual de instruções antes de iniciar a instalação e montagem. Se você tiver alguma dúvida sobre qualquer uma das instruções ou avisos, por favor, entre em contato com seu distribuidor local para assistência.


**ATENÇÃO:** O uso com produtos mais pesados do que os pesos indicados pode resultar em instabilidade, causando possíveis danos.

- Os suportes devem ser anexados como especificado nas instruções de montagem. A instalação incorreta pode causar danos ou sérias lesões pessoais.
- *Exclusivamente da segurança e ferramentas adequadas devem ser utilizadas. Não protuberâncias de um ser instalado no confinamento.*

- Este produto é projetado para ser instalado em pilares verticais de paredes de madeira, paredes de concreto sólido ou de tijolos.
- Certifique-se que a superfície de suporte suportará com segurança o peso combinado do equipamento e todas as ferragens e componentes anexados.

• Este produto contém pequenas peças que podem causar asfixia se ingeridas. Mantenha esses itens longe do alcance de crianças.

**MANUTENÇÃO:** Certifique-se que o suporte seja seguro e adequado para o uso em intervalos regulares (pelo menos a cada três meses).

[illegible]

**1 (x1)**  
Cable Management Pole

**2 (x1)**  
Lower Arms

**3 (x1)**  
Spring Arms

**4 (x1)**  
VESA Plates

**5 (x1)**  
Base

**6 (x1)**  
Clamp L-Bracket

**7 (x1)**  
Pole

**8 (x1)**  
Clamp Cover

**9 (x1)**  
Laptop Tray

**10 (x1)**  
Clamp Screw Assembly

**11 (x1)**  
Grommet Plate

**12 (x1)**  
Clamping Plate

**13 (x1)**  
Adhesive Pad

**14 (x1)**  
Cable Management Clip

**15 (x1)**  
VESA Connector Bolt

**16 (x4)**  
M8x25 Bolts

**17 (x2)**  
Clamp/Grommet Bolts

**18 (x4)**  
M4x8 Bolts

**19 (x4)**  
D5 Washers

**20 (x1)**  
4mm Hex Wrench

**21 (x1)**  
6mm Hex Wrench


M-A (x4)  
M4x20

M-B (x4)  
M4x20

M-C (x4)  
D5

**CHOKING HAZARD.** Package includes small parts.  
Not for children under 3 years. Adult supervision is required.




## DIMENSIONS & WEIGHT CAPACITY



## Step 1a

### Clamp Installation for 10-85mm thickness desks


- Connect Clamp L-Bracket (#F) to the Base (#E) using Bolts (#P) and tighten until secure.
- Peel off the backing from Adhesive Pad (#L) and stick it onto the installed Clamp L-Bracket as shown.
- Partially install the Clamp Bolts (#Q) to the Clamp Screw Assembly (#I), then place the Clamping Plate (#K) onto the tips of the bolts.

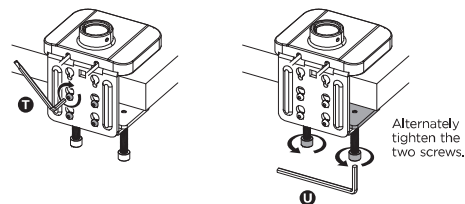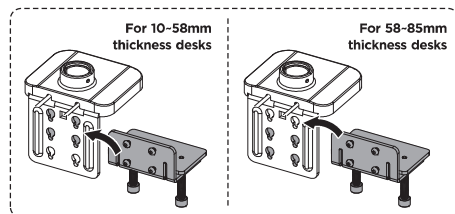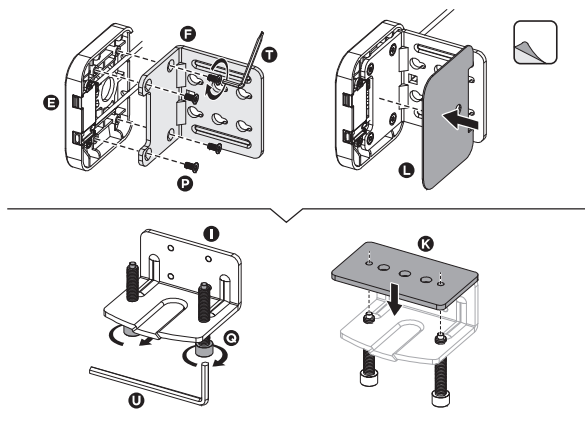

## Step 1b

### Grommet Installation for 10-48mm thickness desks & $\phi 10$ -60mm installation holes


- Connect Grommet Plate (#J) to the Base (#E) using Bolts (#P) and tighten until secure.
- Peel off the backing from Adhesive Pad (#L) and stick it onto the installed Grommet Plate as shown.
- Insert one of the Grommet Bolts (#Q) through the center of the Clamping Plate (#K).
- Place the Base (#E) over the grommet hole, and attach the grommet bolt and clamping plate from underneath the desk and tighten until secure.

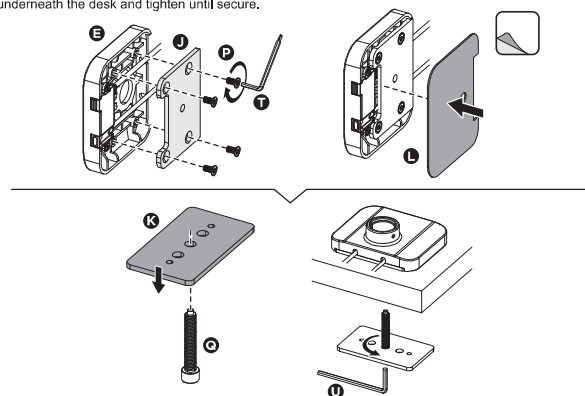

## Step 2

### Install the Pole


- Twist the threaded end of the Pole (#A) into the Base until it is fully tightened, then tighten the set screws on the base. Place the Cable Management Clip (#M) onto the pole.
- Loosen the set screws on the collar to slide the collar up or down the pole to the desired height, then retighten.

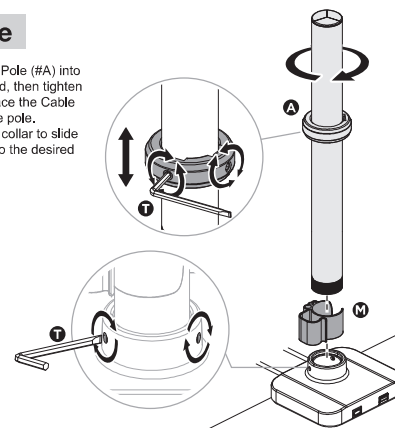

## Step 3

### Install the Lower Arm


- Slide the Lower Arm (#B) onto the pole until it rests on the collar, then partially tighten the set screw.
- Slide the Cable Management Clip (#G) in place on the rear of the clamp.

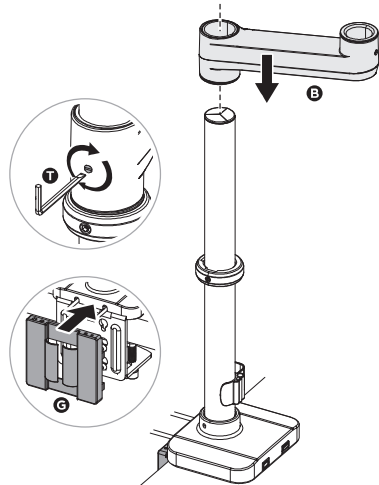

## Step 4

### Attach the Spring Arm


- Place the Spring Arm (#C) onto the end of the Lower Arm, then partially tighten the set screw.



## Step 5

### Connect the VESA Head to the Spring Arm

- Connect the VESA Head (#D) to the end of the Spring Arm using the Connecting Washer (#N) and Connecting Bolt (#O). Tighten until secure using the Hex Wrench (#U).
- Note:** Ensure the Washer is oriented so that the hexagonal interior end is facing upwards, as illustrated here.
- Remove the thumb screw from the back of the VESA Head, pull the bottom of the VESA Plate on the front away then up to remove it.


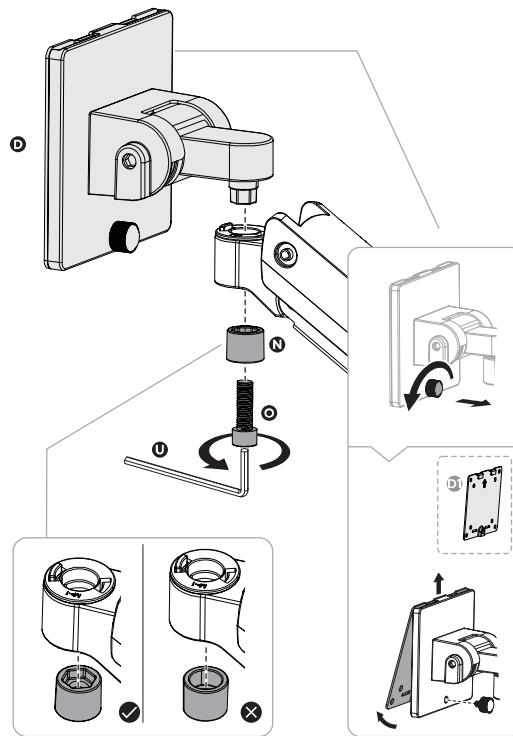


## Step 6a

### Attach the VESA Plate to the Monitor

**Note: This is an optional step to mount a monitor instead of the laptop tray.**





- Select the appropriate size mounting bolt (#M-A, M-B) for your monitors mounting holes and verify the length of the VESA bolt is not too long. If you are unsure of the correct bolt size for your display refer to your monitor user manual or contact the monitor manufacturer for sizing information.
- Install the VESA Plate onto the back of the monitor using the selected Bolts (#M-A or M-B) and Washers(#M-C) and ensure that the arrow on the plate is pointing up to the top of the monitor.
- Hang the monitor onto the end of the mount arm and reinstall the thumb screw to secure it to the arm.



## Step 6b

### Attach the Laptop Tray


- Attach the plate to the back of the Laptop Tray (#H) using the Bolts (#R) and the Washers (#S).
- Hang the Laptop Tray onto the end of the mount arm and reinstall the thumb screw to secure it to the arm.
- Pull the side arms on the tray apart, then insert the laptop into position on the tray, allowing the arms to hold it in place.



## Step 7

### Weight Balancing the Gas Spring Arm

- Gas Spring tension may need to be adjusted to suit the weight of the monitors. To weight balance the spring arm, begin by pushing the arm down to the lowered position, then use the 6mm Hex Wrench (#U) to adjust the bolt, turning counterclockwise toward the + (plus) sign for heavier monitors, increasing the tension and clockwise toward the - (minus) sign for lighter monitors, lowering the tension. Adjust until the arm does not raise back to the highest position or sink to the lowest position when released. This might require multiple rotations to reach the desired tension.

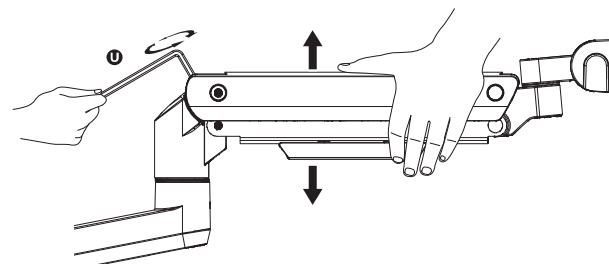

To properly balance the arm with monitor mounted, adjust the spring tension using the supplied Allen Key as follows:

First, position and firmly hold the arm horizontally as shown. Ask for assistance should you require it.



**CAUTION:** To avoid damage to monitor or mount, always keep the arm in a horizontal position while making adjustments. Again, ask for assistance if required.



If the arm **drops**, turn the adjustment screw counter-clockwise until it stays in a horizontal position.



If the arm **rises**, turn the adjustment screw clockwise until it stays in a horizontal position.




**CAUTION:** **DO NOT** over tighten the screws.

## Step 8

### Cable Management


- Remove the cable management covers by sliding them up parallel to the arms, then pull them away. Route cables and reinstall the covers.

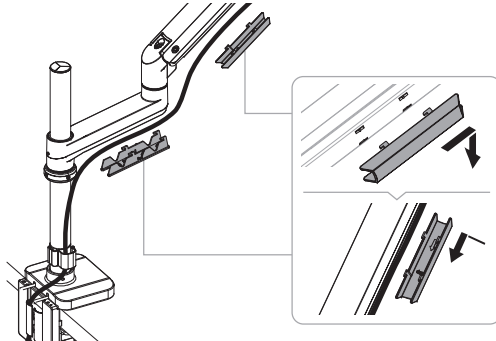

## Step 9

### Final Adjustments

- To adjust the tilt angle of your screen, tilt the screen to your desired viewing angle. If the screen does not stay in that position after adjustment, tighten the bolts on the side of the joint shown here using the 6mm Hex Wrench (#U).
- The screen can be swiveled side to side for the optimal viewing angle and may be rotated 360°.

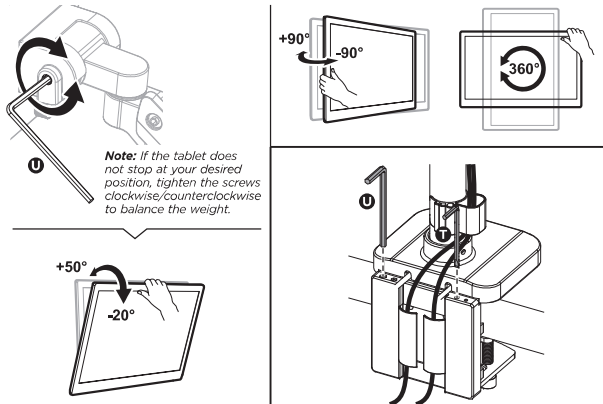

Visit us at **www.mount-it.com** for product registration and warranty information.

---

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.



[support@mount-it.com](mailto:support@mount-it.com)

Available by phone **Monday - Friday from 5:00am to 5:00pm** PST.



(855) 925-5668

*Chat live with an agent on our website!*



[www.mount-it.com](http://www.mount-it.com)