




Scan this QR code for
product information, videos,
and assembly assistance.

Heavy-Duty Monitor Arm

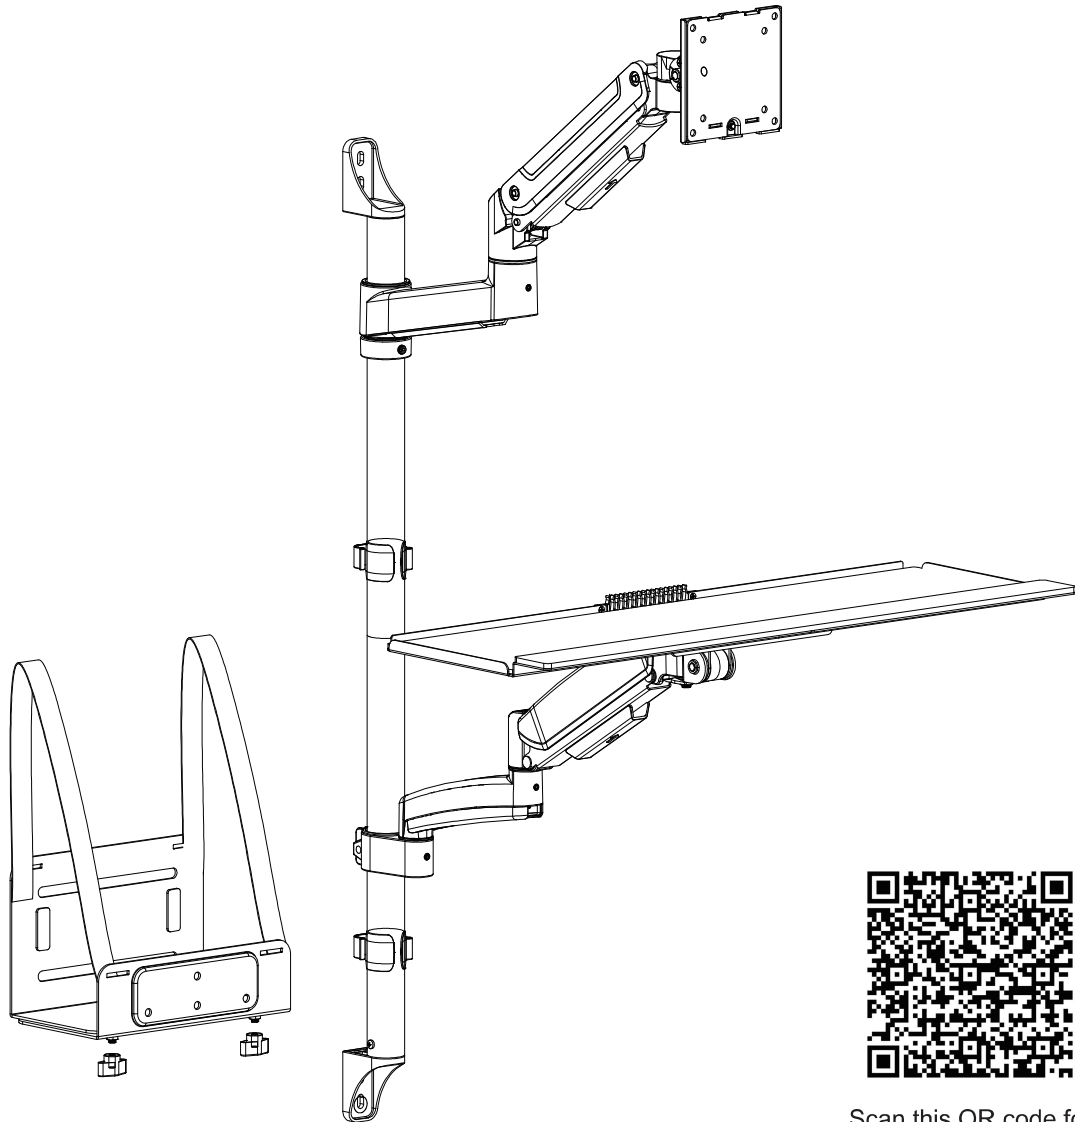

HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com



(855) 925-5668



www.mount-it.com

CAUTION: Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact Mount-It! for assistance.

WARNING: Use with products heavier than the rated weights may result in instability causing possible injury.

- Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. This product should only be installed by professionals.
- This product is designed to be installed on solid concrete walls, masonry walls or wood stud walls.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Use the mounting screws provided and DO NOT OVER TIGHTEN mounting screws.
- This product contains small items that could be a choking hazard if swallowed. Keep these items away from children.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact Mount-It! for a replacement.

MAINTENANCE: Check that the product is secure and safe to use at regular intervals (at least every three months).

DE Lesen Sie die gesamte Bedienungsanleitung, bevor Sie mit der Installation und Montage beginnen. Wenn Sie Fragen zur Anleitung oder Warnungen haben, wenden Sie sich bitte an Ihren örtlichen Händler.

VORSICHT: Die Verwendung mit Produkten, die schwerer als die angegebenen Nennengewichte sind, kann zu Instabilität führen und zu möglichen Verletzungen führen.

- Bitte befolgen Sie die Montageanleitung genau. Eine unsachgemäße Installation kann zu Schäden oder schweren Verletzungen führen.
- Verwenden Sie die mitgelieferten Befestigungswerkzeuge. Falsche Werkzeuge können verwendet werden. Dieses Produkt sollte nur von Fachleuten installiert werden.
- Dieses Produkt ist auf massiven Betonwänden oder Mauerwerkswänden zu montieren.
- Stellen Sie sicher, dass die Aufhängelast das Gesamtgewicht des Geräts und aller angeschlossenen Komponenten sicher trägt.
- Verwenden Sie die mitgelieferten Befestigungsschrauben und die Befestigungsschrauben NICHT ZU FEST ANZIEHEN.
- Dieses Produkt enthält kleine Gegenstände, die verschluckt werden können. Halten Sie diese Gegenstände von Kindern fern.
- Dieses Produkt ist nur für den Innenbereich bestimmt. Die Verwendung dieses Produkts im Freien kann zu Produktversagen und Verletzungen führen.

WICHTIG: Stellen Sie vor der Installation sicher, dass Sie alle Teile gemäß der Komponenten-Checkliste erhalten haben. Bei beschädigten oder fehlenden Teilen, wenden Sie sich an Ihren Verkäufer, um Ersatz zu erhalten.

WARTUNG: Überprüfen Sie das Produkt in regelmäßigen Abständen auf Sicherheit und Stabilität (am besten alle drei Monate).

FR Lisez entièrement le guide d'utilisateur avant de commencer l'installation et le montage. Si vous avez des questions concernant les instructions ou les avertissements, contactez votre distributeur local pour une assistance.

ATTENTION: L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.

- Les supports doivent être joints comme spécifiés dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
- Un équipement de sécurité et les outils appropriés doivent être utilisés. Ce produit devrait être installé uniquement par des professionnels.
- Ce produit est conçu pour être installé sur des murs avec poteaux en bois. Des murs en béton massif ou murs en brique.
- Assurez-vous que la surface de soutien supporte en sécurité le poids combiné de l'équipement et de tous les matériaux et composants associés.
- Utilisez les vis de montage fournies et NE SERREZ PAS TROP les vis.
- Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Éloignez ces pièces des enfants.
- Ce produit est prévu uniquement pour une utilisation à l'intérieur. L'utilisation de ce produit à l'extérieur peut entraîner une défaillance du produit ou des blessures aux personnes.

IMPORTANT: Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour qu'il le remplace.

MAINTENANCE: A intervalles réguliers (au moins tous les trois mois) vérifiez que le support est d'utilisation sûre et fiable.

RU Перед началом установки и сборки прочтите руководство по установке. Если у Вас возникли какие-либо вопросы относительно инструкций или предупреждений, свяжитесь с Вашим местным дистрибутором для получения помощи.

ВНИМАНИЕ: Использование продукта, вес которого превышает указанный весовой предел, может привести к неустойчивости и возможным травмам.

- Поддерживать изделие необходимо так, как это показано в монтажных инструкциях. Неправильная установка может привести к получению серьезных травм.
- Необходимо использовать предупредительное устройство и специальные инструменты. Продукт должен устанавливаться только профессионалами.
- Продукт предназначен для установки на деревянные каркасные стены, твердые цементные стены или кирпичные стены.
- Убедитесь, что несущая поверхность выдержит вес всего установленного оборудования и комплектующих.
- Необходимо использовать монтажные винты, входящие в комплект поставки, и НЕ ПЕРЕГРУЖАТЬ монтажные винты.
- Данный продукт содержит мелкие детали, которые представляют опасность удушья при проглатывании. Такие детали необходимо хранить в недоступной для детей месте.
- Данный продукт предназначен только для эксплуатации в помещении. Использование данного продукта на улице может привести к поломке продукта и получению травм.

ВАЖНО: Перед установкой убедитесь, что Вы получили все детали в соответствии со списком комплектующих. Если не хватает каких-либо деталей или они поломаны, свяжитесь с Вашим местным дистрибутором по вопросу замены.

ТЕХНИЧЕСКОЕ ОБСЛУЖИВАНИЕ: Регулярно проверяйте (как минимум раз в три месяца), чтобы крепежи были зафиксированы и что использование было безопасным.

ES Lea todo el manual de instrucciones antes de comenzar la instalación y ensamble de la unidad. Si tiene alguna inquietud con respecto a las instrucciones o advertencias, comuníquese con su distribuidor local.

PRECAUTION: Utilizar con productos de mayor peso al indicado en los límites de peso podría causar inestabilidad y posibles heridas personales.

- Los soportes deben acoplarse tal como se indica en las instrucciones de ensamble. Una incorrecta instalación podría causar daños y serias heridas personales.
- Utilice las herramientas y equipo de seguridad adecuados. Este producto solo debe ser instalado por profesionales.
- Este producto está diseñado para instalaciones en paredes de madera sólida, concreto sólido o bloques.
- Asegúrese de que la superficie de fijación soportará de manera segura el peso total de la unidad y todos sus componentes y hardware.
- Utilice los tornillos de montaje suministrados y NO AJUSTE demasiado tensión a los tornillos.
- Este producto contiene piezas pequeñas que representan un riesgo de asfixia. Mantenga estas piezas fuera del alcance de los niños.
- Este producto está diseñado para usar en interiores solamente. Utilizar este producto en exteriores podría ocasionar fallas y heridas personales.

IMPORTANTE: Asegúrese de que haya recibido todas las piezas según la lista de verificación de componentes para la instalación. Si falta alguna de las partes, o está dañada, comuníquese con su distribuidor local para asistencia.

MANTENIMIENTO: Compruebe periódicamente que el soporte está asegurado y listo para usar (al menos cada tres meses).

PT Leia todo o manual de instruções antes de iniciar a instalação e montagem. Se você tiver alguma dúvida sobre quaisquer uma das instruções ou avisos, por favor, entre em contato com o seu distribuidor local para assistência.

ATENÇÃO: O uso com produtos mais pesados do que os pesos indicados pode resultar em instabilidade, causando possíveis danos.

- Os suportes devem ser anexados como especificado nas instruções de montagem. A instalação incorreta pode causar danos ou sérias lesões pessoais.
- Utilize as ferramentas e equipamentos adequados de acordo com as instruções. Este produto só deve ser instalado por profissionais.
- Este produto é projetado para ser instalado em pilares verticais de paredes de madeira, paredes de concreto sólido ou de tijolos.
- Certifique-se que a superfície de suporte suportará com segurança o peso combinado do equipamento e todos os acessórios e componentes anexados.
- Utilize os parafusos de montagem fornecidos e NÃO AJUSTE EXCESSIVAMENTE os parafusos.
- Este produto contém pequenas peças que podem causar asfixia se ingeridas. Mantenha estas peças longe do alcance de crianças.
- Este produto destina-se somente para uso interno. Usá-lo em ambiente externo pode causar falhas no produto e lesões pessoais.

IMPORTANTE: Certifique-se que você recebeu todas as peças, de acordo com a lista de componentes, antes da instalação. Se alguma peça estiver faltando ou é defeituosa, contate o seu distribuidor local para assistência.

MANUTENÇÃO: Assegure-se que o suporte esteja seguro e protegido para o uso em intervalos regulares (pelo menos a cada três meses).

A (x1) Upper Pole	B (x1) Lower Pole	C (x1) Monitor Spring Arm	D (x1) Keyboard Spring Arm	E (x1) Lower Keyboard Arm	F (x1) Lower Monitor Arm	G1 (x1) Keyboard Tray
G2 (x1) Keyboard Tray	H (x1) Keyboard Bracket	I (x1) Tray Pad	J (x1) Wrist Pad	K (x1) Keyboard Collar	L (x2) Cable Clip	M (x1) Monitor Collar
N (x1) VESA Head	O (x2) Wall Brackets	P (x1) Tray Cable Clip	Q (x6) Nuts	R (x4) Keyboard Mount Bolts	S (x2) Tray Cable Clip Bolts	T (x4) Keyboard Mount Bolts
V (x1) VESA Connector Washer	W (x1) VESA Connector Bolt	X-1 (x1) 3mm Hex Wrench	X-2 (x1) 4mm Hex Wrench	X-3 (x1) 5mm Hex Wrench	X-4 (x1) 6mm Hex Wrench	X-5 (x1)

M=A (x4) M4x12	M=B (x4) M5x12	M=C (x4) D5	W=A (x4)	W=B (x4)	W=C (x4)

CHOKING HAZARD. Package includes small parts.
Not for children under 3 years. Adult supervision is required.


Missing Parts? Call us at (855) 925-5668 and we will ship replacement parts free of charge.

The technical drawing includes two views of the mounting system:


- Side View (Top):** Shows the vertical profile of the mount. Key dimensions include a total height of 38.36", a screen depth of 7.09", and various horizontal offsets: 3.25", 9.41", 1.48", and 3.26". It also indicates a distance of 7.22" from the screen to the base.
- Front View (Bottom):** Shows the width of the mount. Dimensions include a central opening width of 19.13", a base width of 19.75", and side clearances of 4.53" and 4.58". A small inset shows a detail of the base plate with dimensions 1.95", 9.08", and 9.35".

Step 1

Separate the PC Mount

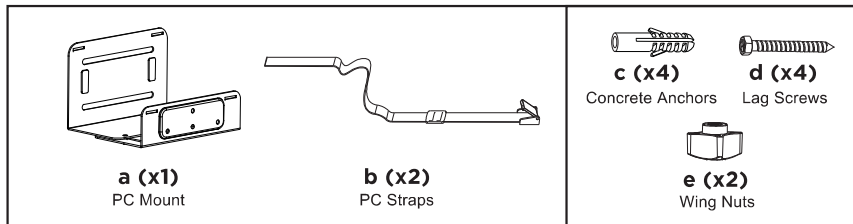


- Remove the **nuts (a4)** on the underside of the **PC Mount (#a)** and dispose, these nuts will not be used again. Separate the mount into **two halves (a1, a2)** keeping the **washers (a3)** for later, they will be replaced in their original position later, between the two halves of the mount.

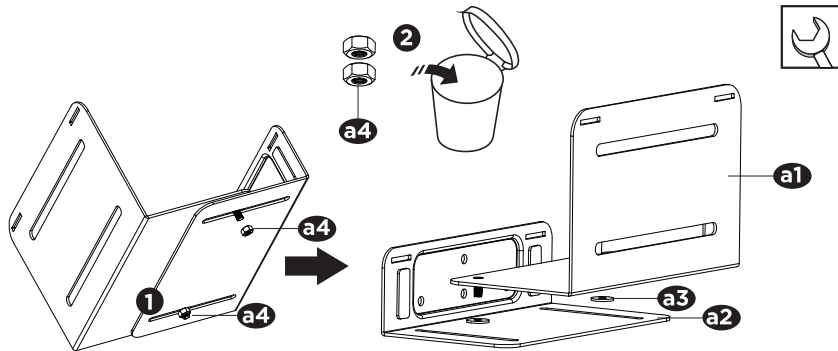

Step 2a

Concrete/brick Installation Option


- Hold the shorter side of the **PC Mount (a2)** to the wall in the location it will be mounted and mark the location for the 3 holes on the wall with a pencil.
- Drill holes in the marked locations using a 3/8" drill bit (10mm) to a depth of 2.4" (60mm). Clear dust or debris from the holes and insert the **Concrete Anchors (#c)** fully until they are flush with the wall.
- Insert the ends of the two PC Straps through the horizontal slots on the upper left and right of the PC Mount. Ensure that the latch side of the straps faces the wall when held straight up against the wall from the PC mount.
- Secure the mount to the wall using the **3 Lag Screws (#d)**. Tighten until secure.

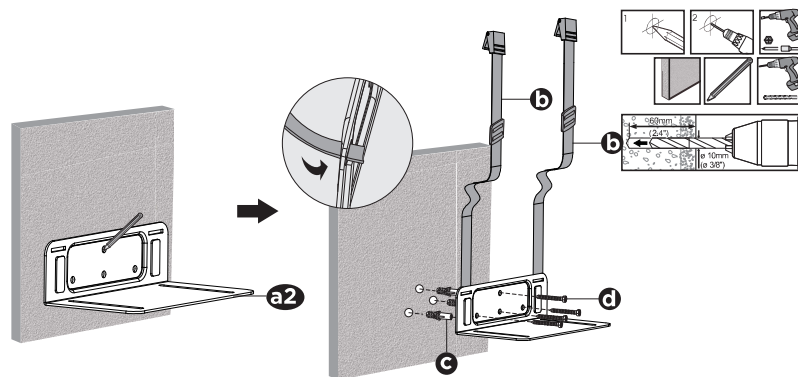

Step 2b

Wall Stud Installation Option


- Use a stud finder to locate the center of the stud, then hold the shorter side of the **PC Mount (a2)** to the wall in the location it will be mounted and mark the location for the 2 center holes on the wall with a pencil.
- Drill holes in the marked locations using a 3/16" drill bit (4.5mm) to a depth of 2.2" (55mm).
- Insert the ends of the two PC Straps through the horizontal slots on the upper left and right of the PC Mount. Ensure that the latch side of the straps faces the wall when held straight up against the wall from the PC mount.
- Secure the mount to the wall using the **2 Lag Screws (#d)**. Tighten until secure.

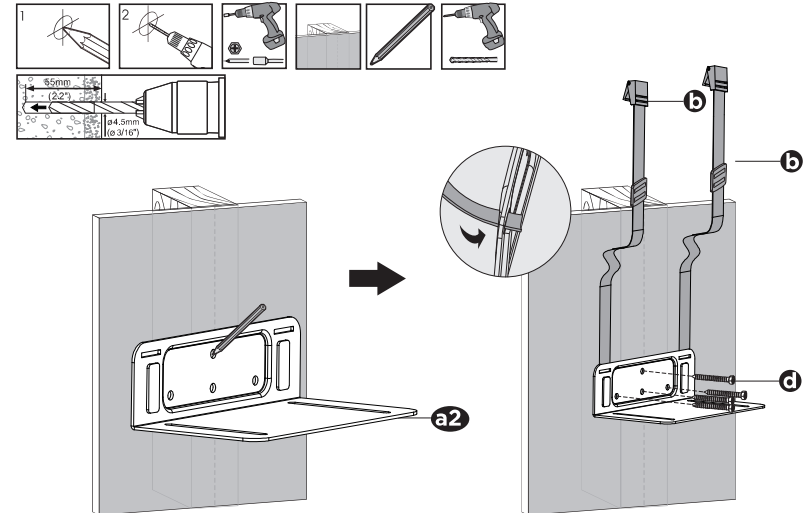

Step 3

Reassemble the PC Mount


- Re-attach the two halves of the PC Mount, ensure the washers are still present on the threaded bolt between the two halves of the mount, then attach the **Wing Nuts (#e)** from the bottom of the mount.
- Pass the end of the PC Straps through the two short horizontal slots on the newly attached half of the PC Mount. Thread the straps through the slide buckle on the strap and leave the straps loose enough to insert the PC.

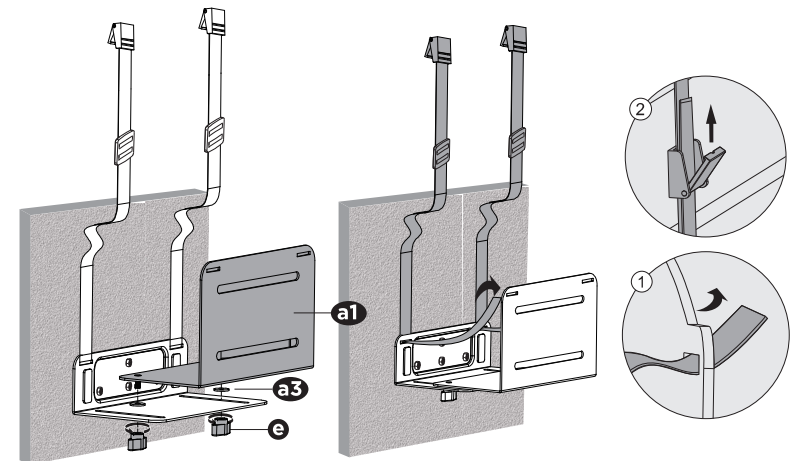

Step 4

Attach the PC Mount to the PC


- Insert the PC into the PC Mount and adjust the width of the PC mount to fit your device. To do so loosen the hand knobs in the underside of the mount and push or pull the halves to fit snugly against the sides of your PC.
- Tighten the straps by pulling all the slack through the first slide buckle (shown in magnified bubble 1) then push the flap of the buckle down to latch the straps in place.

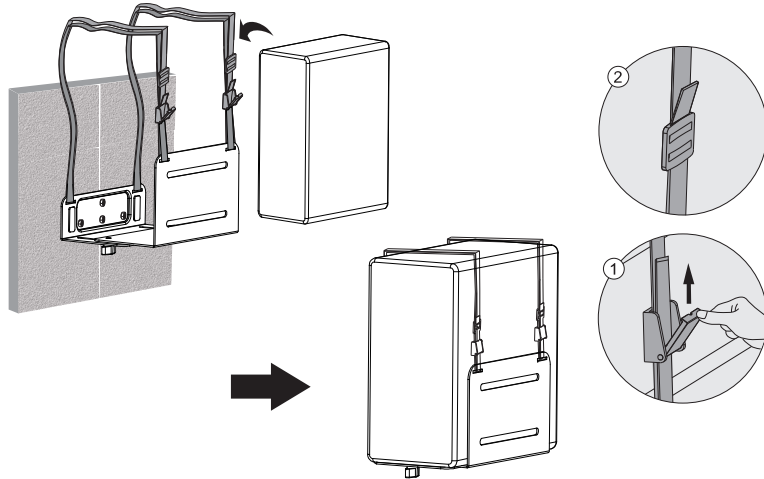

Step 5a

Wood Stud Mounting Option


- With a stud finder locate the stud and center the **lower Wall Bracket (#O)** on the stud at the desired height. Using a bubble level to ensure straightness mark the center of the mounting holes with a pencil.
- Use a 3/16" drill bit and drill on the marked locations to a depth of 2.2". Secure the **Wall Bracket (#O)** to the wall using **Lag Screws (#W-A)** and **Washers (#W-C)**. Tighten the screws until secure.
- Place the **Lower Pole (#B)** onto the top of the Wall Bracket and rotate it until the holes in the pole are aligned with the holes in the bracket. Secure the pole in place using the **Pole Bolts (#U)** on each side of the pole.

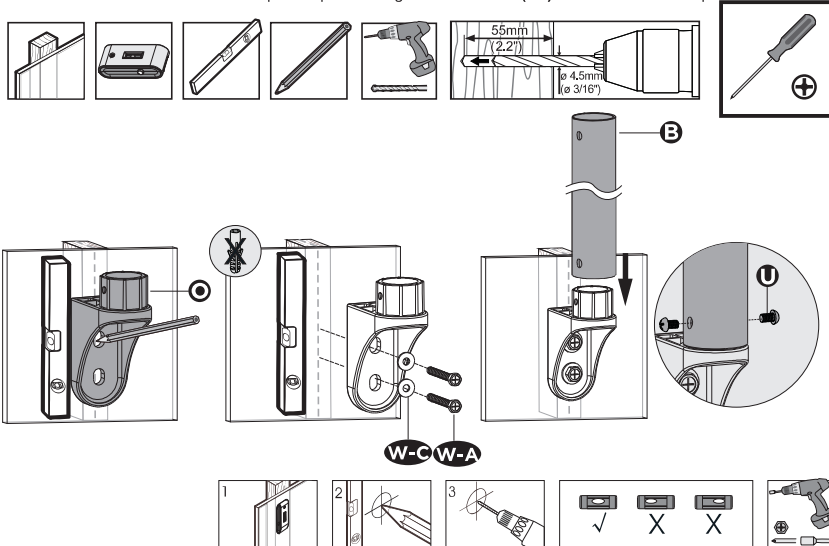

Step 5b

Concrete/Brick Mounting Option


- Using a bubble level to ensure straightness hold the **lower Wall Bracket (#O)** to the desired location on the wall and mark the center of the mounting holes with a pencil.
- Use a 3/8" drill bit and drill on the marked locations to a depth of 2.4". Clear any dust and debris from the holes and insert the **Concrete Anchors (#W-B)**. Secure the **Wall Bracket (#O)** to the wall using **Lag Screws (#W-A)** and **Washers (#W-C)**. Tighten the screws until secure.
- Place the **Lower Pole (#B)** onto the top of the Wall Bracket and rotate it until the holes in the pole are aligned with the holes in the bracket. Secure the pole in place using the **Pole Bolts (#U)** on each side of the pole.

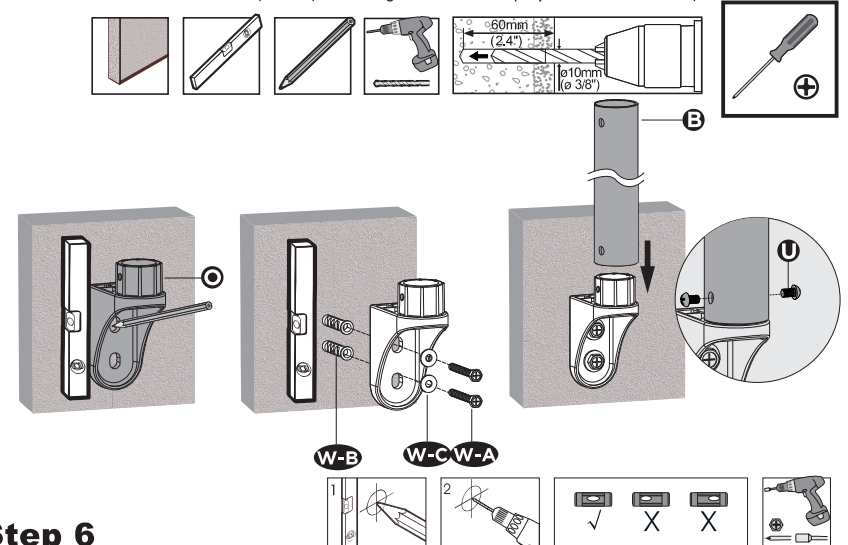

Step 6

Assemble the Mount


- Slide the first **Cable Clip (#L)** followed by the **Keyboard Collar (#K)** onto the **Lower Pole (#B)**, then tighten the bolt on the collar until it stays in place.
- Twist the **Upper Pole (#A)** into place on top of the lower pole. Slide the second **Cable Clip (#L)** followed by the **Monitor Collar (#M)** tightening the set screws on the collar until it stays in place. Slide the **Lower Monitor Arm (#F)** onto the pole until it rests on the monitor collar.

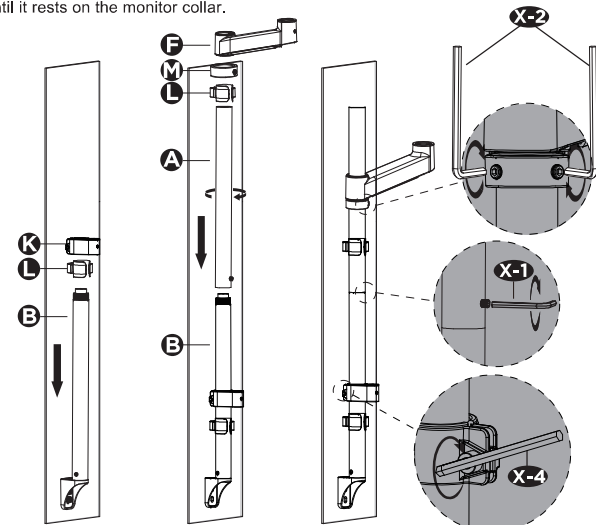

Step 7a

Secure the Top Bracket - Wood Stud Mounting Option


- Insert the **Wall Bracket (#O)** into the open top of the upper pole. With a stud finder locate the stud and center the upper **Wall Bracket (#O)** on the stud. Using a bubble level to ensure straightness mark the center of the mounting holes with a pencil.
- Use a 3/16" drill bit and drill on the marked locations to a depth of 2.2". Secure the **Wall Bracket (#O)** to the wall using **Lag Screws (#W-A)** and **Washers (#W-C)**. Tighten the screws until secure.

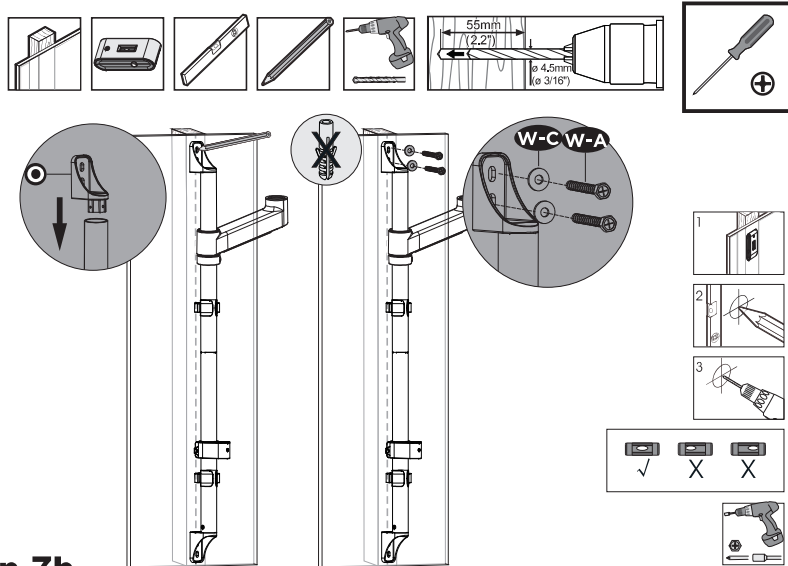

Step 7b

Secure the Top Bracket - Concrete/Brick Mounting Option


- Insert the **Wall Bracket (#C)** into the open top of the upper pole. Using a bubble level to ensure straightness hold the upper **Wall Bracket (#O)** to the wall and mark the center of the mounting holes with a pencil.
- Use a 3/8" drill bit and drill on the marked locations to a depth of 2.4". Clear any dust and debris from the holes and insert the **Concrete Anchors (#W-B)**. Secure the **Wall Bracket (#O)** to the wall using **Lag Screws (#W-A)** and **Washers (#W-C)**. Tighten the screws until secure.

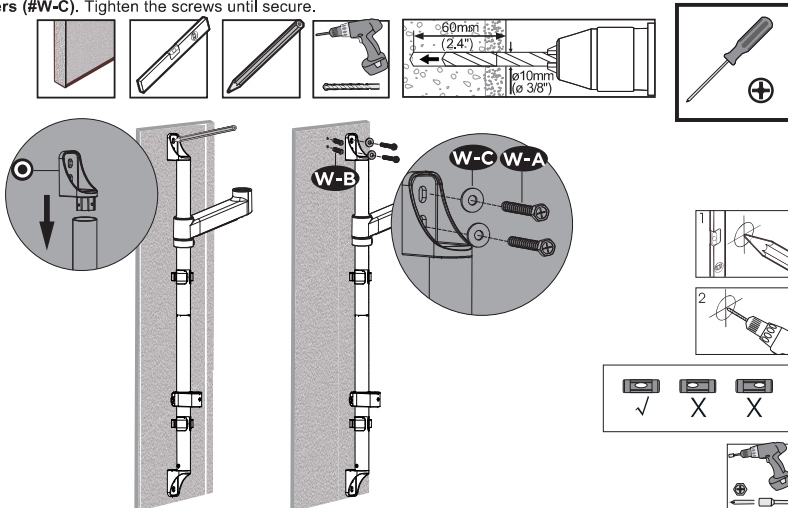

Step 8

Assemble the Monitor Arm


- Insert the **Monitor Spring Arm (#C)** into the **Lower Monitor Arm (#F)** and partially tighten the set screw at the joint.
- Connect the **VESA Head (#N)** to the end of the Spring Arm using **VESA Connector Washer (#V)** and **VESA Connector Bolt (#W)**. Tighten until secure using the **Hex Wrench (#X-4)**.

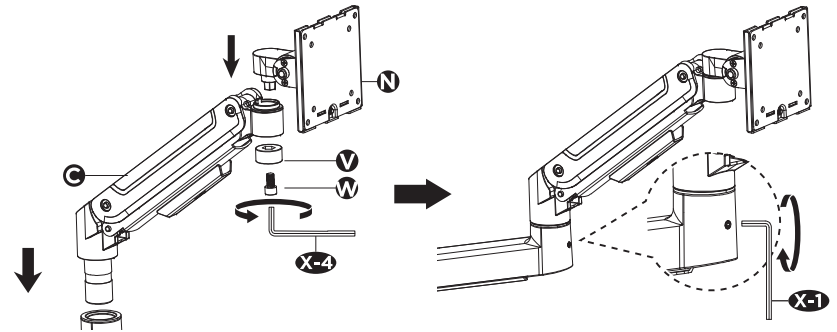

Step 9

Assemble the Keyboard Arm


- Insert the **Lower Keyboard Arm (#E)** into the Keyboard Collar followed by the **Keyboard Spring Arm (#D)** into the end of the lower arm, then partially tighten the set screws at each joint.

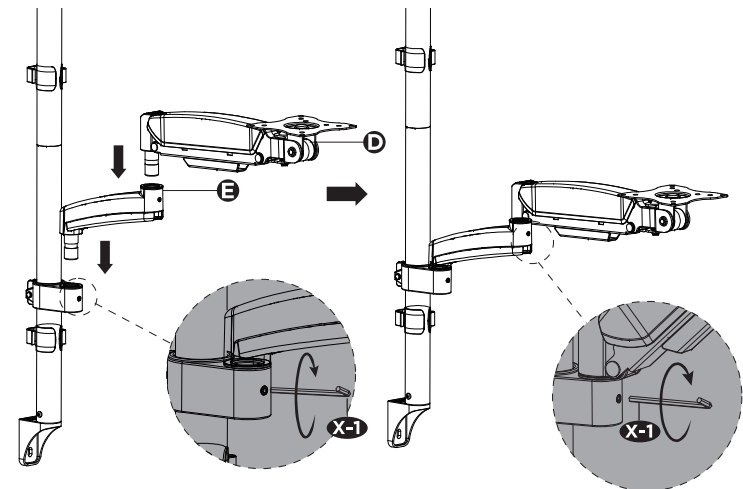

Step 10

Assemble the Keyboard Tray


- Attach the **Keyboard Tray (#G)** halves to the **Keyboard Bracket (#H)** using the **Keyboard Mount Bolts (#T)**

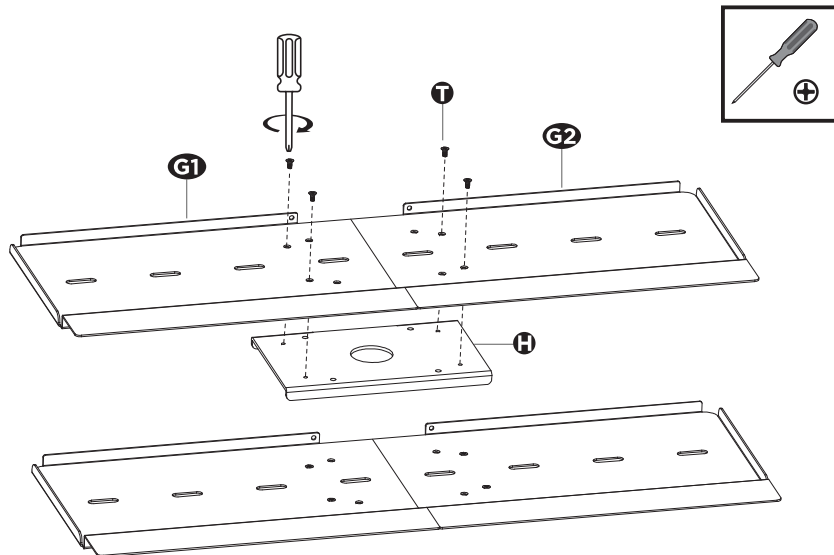

Step 11

Attach the Cable Clip


- Attach the **Tray Cable Clip (#P)** to the top of the keyboard tray assembly using the **Tray Cable Clip Bolts (#S)** and the **Nuts (#Q)**.

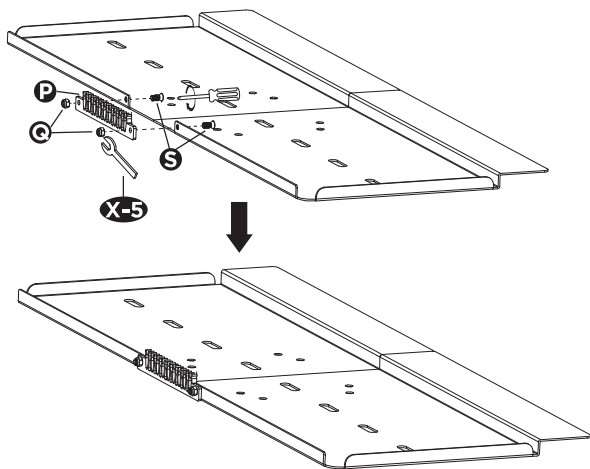

Step 12

Connect the Keyboard Tray



- Connect the Keyboard Tray to the end of the Keyboard Spring Arm using the **Keyboard Mount Bolts (#R)** and the **Nuts (#Q)**.

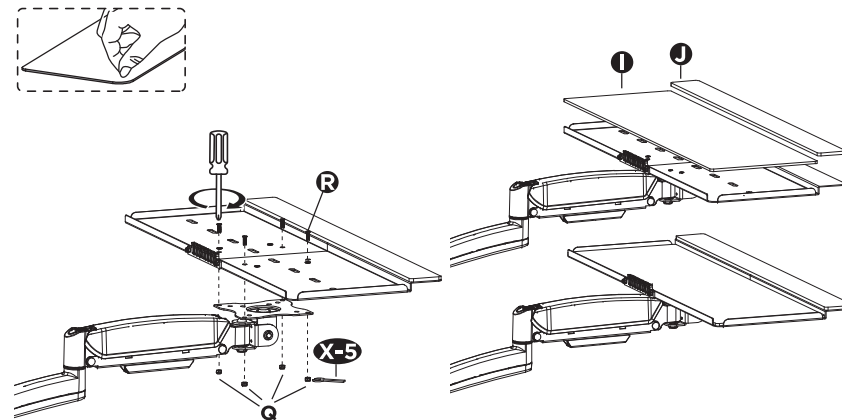

Step 13

Attach the VESA Plate to the Monitor


- Remove the thumb screw from the back of the VESA Head, pull the bottom of the VESA Plate on the front away then up to remove it.
- Select the appropriate size mounting **bolt (#M-A, M-B)** for your monitor's mounting holes and verify the length of the VESA bolt is not too long. If you are unsure of the correct bolt size for your display refer to your monitor user manual or contact the monitor manufacturer for sizing information.
- Install the VESA Plate onto the back of the monitor using the selected **Bolts (#M-A or M-B)** and **Washers (#M-C)** and ensure that the arrow on the plate is pointing up to the top of the monitor.

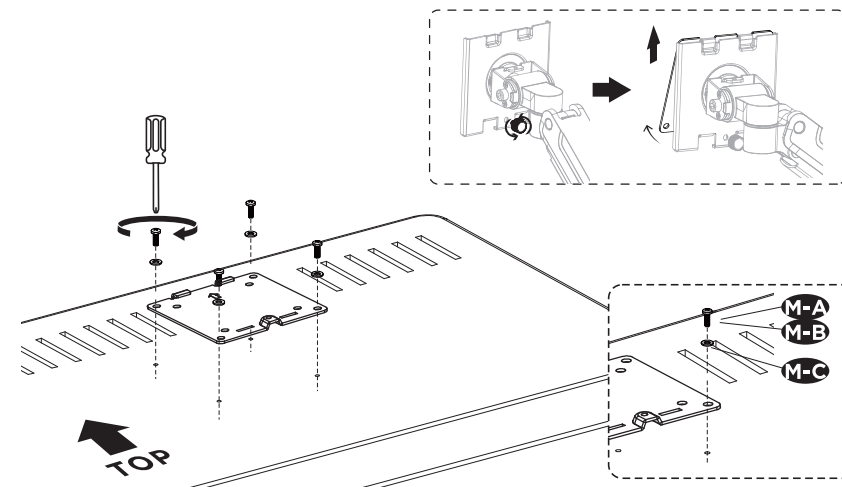

Step 14

Attaching the Monitor


- Hang the monitor on the end of the VESA Head by hooking the top of the plate back onto the end of the arm and then lower it down into position. Reinstall the thumb screw to secure it in place.

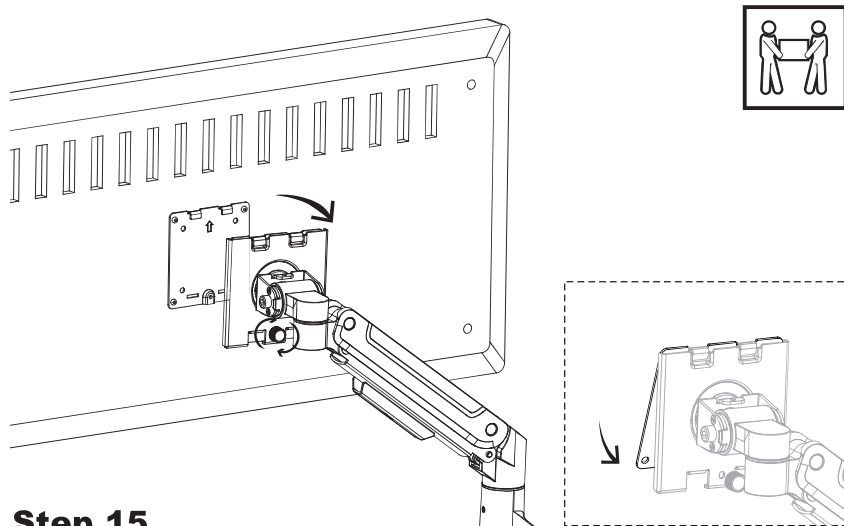

Step 15

Weight Balancing the Spring Arms and Cable Management


- Gas Spring tension may need to be adjusted to suit the weight of the monitor and keyboard tray. To weight balance the two gas spring arms, begin by pushing the arm down to the lowered position then use **Hex Wrench (#X-4)** to adjust the nut as pictured, turning counterclockwise toward the + (plus) sign to increase the tension and clockwise toward the - (minus) sign to lower the tension. Adjust until the arm does not rise back to the highest position or sink to the lowest position when released. This might require multiple rotations to reach the desired tension.
- Route cables through the cable management clips on the underside of each arm segment, and down through the cable management clips on the pole.

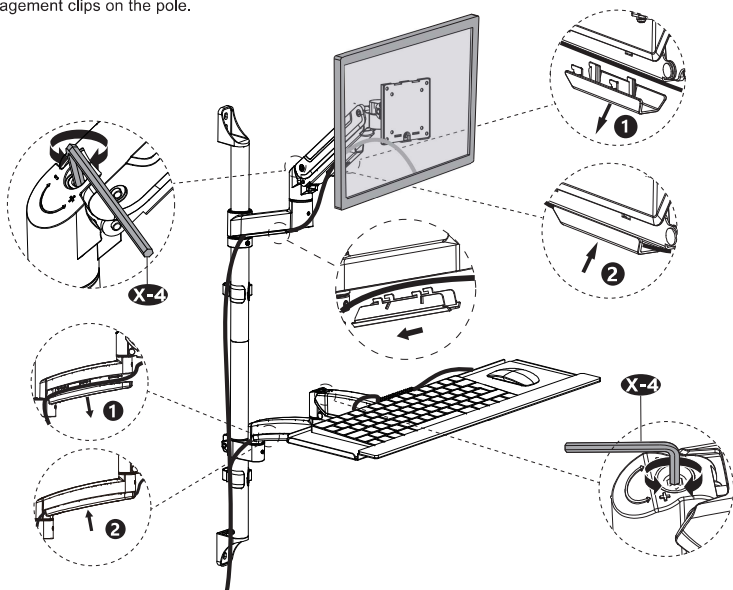

Step 16

Tilt Adjustment

- Adjust the tilt of the monitor and keyboard tray as needed by loosening or tightening the bolts shown here on the side of each joint.

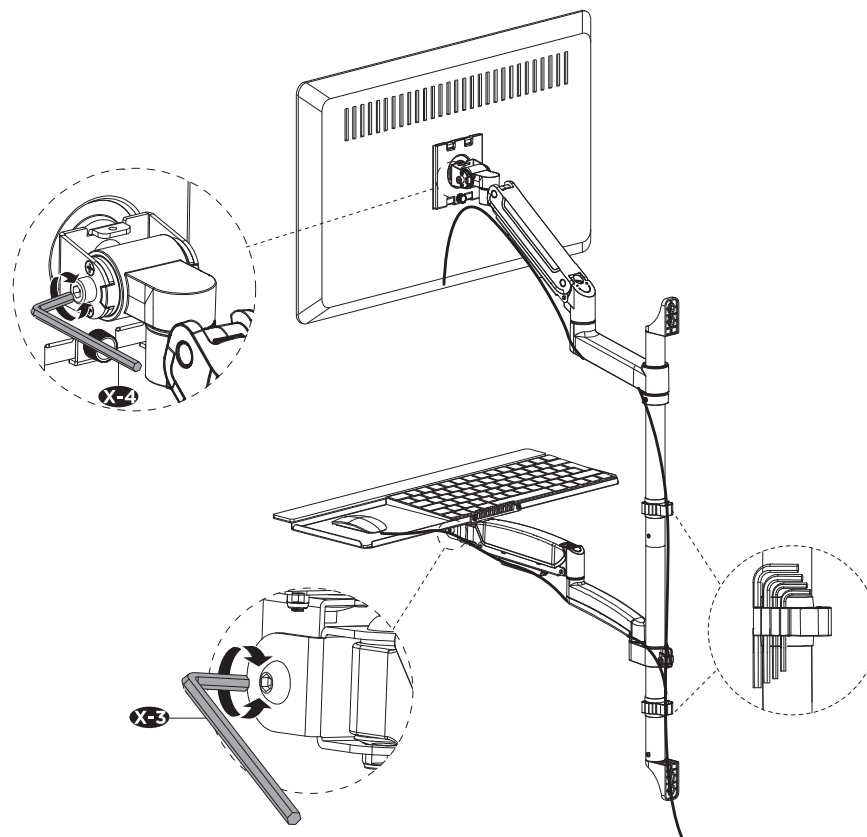

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.



support@mount-it.com

Available by phone **Monday - Friday from 5:00am to 5:00pm** PST.



(855) 925-5668

Chat live with an agent on our website!



www.mount-it.com