


MOUNT-IT!

Installation Manual
SKU:MI-2752L

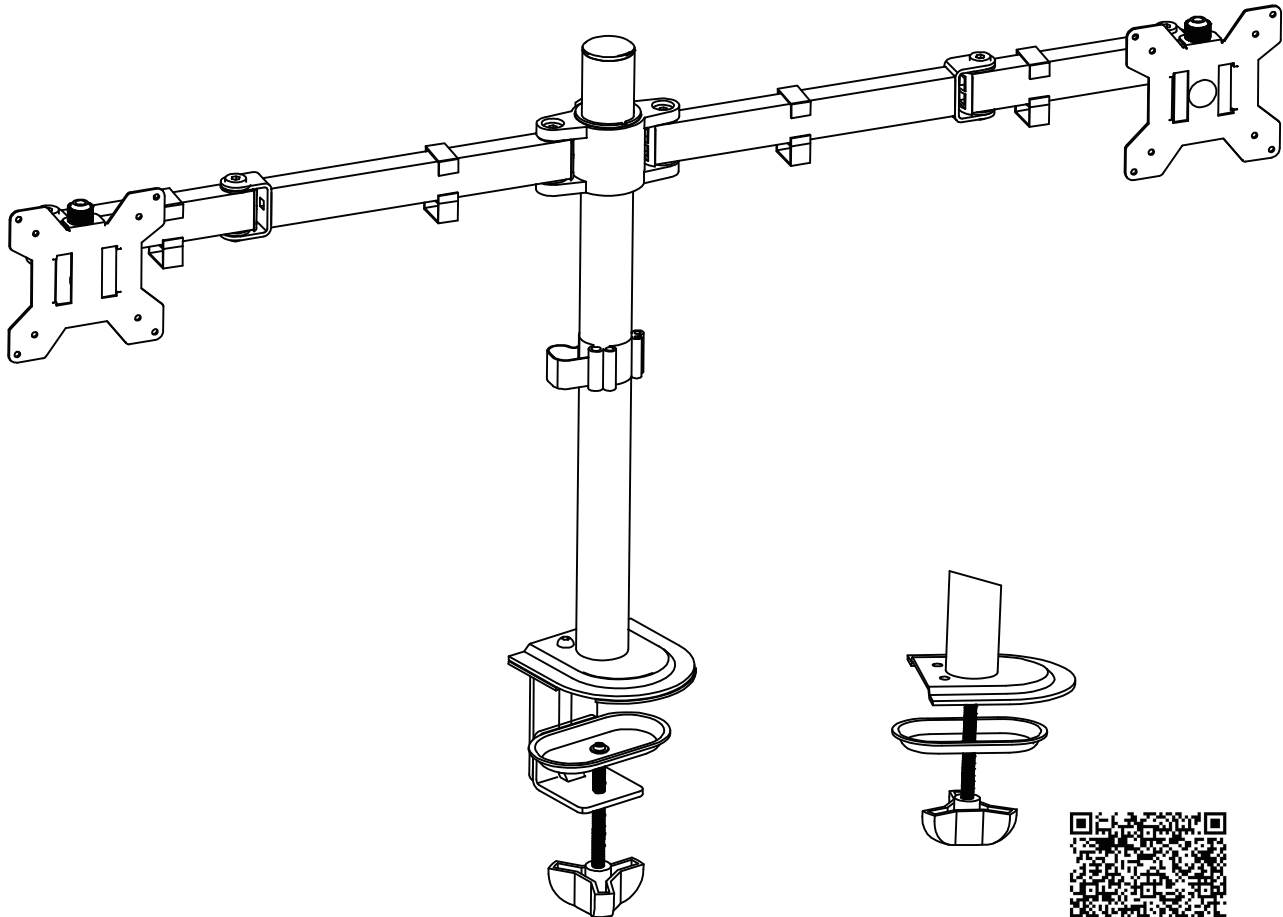

Scan this QR code for
product information, videos,
and assembly assistance.

Full Motion Dual Monitor Desk Mount



HAVE QUESTIONS?

Monday - Friday from 5:00am - 5:00pm PST



support@mount-it.com



(855) 925-5668



www.mount-it.com

Thank you for choosing Mount-It!

EN Read the entire instruction manual before you start installation and assembly. If you have any questions regarding any of the instructions or warnings, please contact Mount-It! for assistance.
CAUTION: Use with products heavier than the rated weights indicated may result in instability causing possible injury.
• Please closely follow the assembly instructions. Improper installation may result in damage or serious personal injury.
• This product is designed to be installed on solid concrete walls, masonry walls or wood stud walls.
• Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
• Use the mounting screws provided and DO NOT OVER-TIGHTEN mounting screws.
• Please do not touch the screen or the bezel. Please keep away from children.
• This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.
IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, contact Mount-It! for a replacement.

DE Lesen Sie das gesamte Bedienungsanleitung, bevor Sie mit der Installation und Montage beginnen. Wenn Sie Fragen zur Anleitung oder Warnungen haben, wenden Sie sich bitte an Mount-It! für Unterstützung.
VORSICHT: Die Verwendung mit Produkten, die schwerer als die angegebenen Nenngewichte sind, kann zu Instabilität führen und zu möglichen Verletzungen führen.
• Bitte befolgen Sie die Montageanleitung genau. Eine unsachgemäße Installation kann zu Schäden oder schweren Verletzungen führen.
• Sicherheitsausrüstung und geeignete Werkzeuge müssen verwendet werden. Dieses Produkt sollte nur von Fachleuten installiert werden.
• Stellen Sie sich sicher, dass die Befestigungsoberfläche das Gesamtgewicht des Geräts und aller angeschlossenen Hardware und Komponenten sicher trägt.
• Verwenden Sie die mitgelieferten Befestigungsschrauben und die Befestigungsschrauben NICHT ZU FEST ANZIEHEN.
• Dieses Produkt enthält Kleinteile, die beim Verschluss eine Erstickungsgefahr darstellen können. Halten Sie diese Gegenstände von Kindern fern.
• Bitte berühren Sie nicht den Bildschirm oder die Abdeckung. Bitte halten Sie Kinder fern.
• Dieses Produkt ist für den Innenbereich bestimmt. Die Verwendung dieses Produkts im Freien kann zu Produktversagen und Verletzungen führen.
• Dieses Produkt ist für den Innenbereich bestimmt. Die Verwendung dieses Produkts im Freien kann zu Produktversagen und Verletzungen führen.
WICHTIG: Stellen Sie sicher, dass Sie alle Teile erhalten. Wenn ein Teil fehlt, wenden Sie sich bitte an Mount-It! für Ersatz.
WARTUNG: Überprüfen Sie das Produkt in regelmäßigen Abständen auf Sicherheit und Stabilität (am besten alle drei Monate).

FR Lisez entièrement le guide d'utilisateur avant de commencer l'installation et la montage. Si vous avez des questions concernant les instructions ou les avertissements, veuillez contacter votre distributeur local pour une assistance.
ATTENTION: L'utilisation de produits plus lourds que les poids nominaux indiqués peut entraîner une instabilité causant des blessures potentielles.
• Les utilisateurs doivent être joints comme spécifié dans les instructions de montage. Une mauvaise installation peut entraîner des dommages ou de graves blessures aux personnes.
• Un équipement de sécurité et les outils appropriés doivent être utilisés. Ce produit doit être installé uniquement par des professionnels.
• Ce produit est conçu pour être installé sur des murs en brique ou en bois, des murs en béton masonry ou sur des briques.
• Utilisez les vis de montage fournies et NE SERREZ PAS TROP les vis de montage.
• Ce produit contient de petites pièces qui peuvent causer un étouffement si elles sont avalées. Éloignez ces pièces des enfants.
• Ce produit est prévu uniquement pour une utilisation à l'intérieur. L'utilisation de ce produit à l'extérieur peut entraîner une dégradation du produit ou des blessures aux personnes.
IMPORTANT: Avant l'installation, assurez-vous que vous avez reçu toutes les pièces selon la liste de vérification des composants. Si une pièce est manquante ou endommagée, téléphonez à votre distributeur local pour qu'il la remplace.


RU Перед началом установки и сборки прочтите руководство по установке. Если у Вас возникли какие-либо вопросы относительно инструкции или предупреждений, свяжитесь с Вашим местным распространителем для получения помощи.
ВНИМАНИЕ: Использование изделий более тяжелых, чем указанные номинальные веса, может привести к неустойчивости и серьезным травмам.
• Пользователи должны быть связаны, как это показано в монтажных инструкциях. Неправильная установка может привести к получению серьезных травм.
• Необходимо использовать предохранительные устройства и специальные инструменты. Продукт должен устанавливаться только профессионалами.
• Продукт предназначен для установки на кирпичные стены, бетонные стены или кирпичные стены.
• Используйте только крепежные винты, входящие в комплект поставки, и НЕ ПЕРЕГРУЖАТЬ крепежные винты.
• Данный продукт содержит мелкие детали, которые представляют опасность удушья для детей. Удалите эти детали от детей.
• Данный продукт предназначен только для эксплуатации в помещениях. Использование данного продукта на улице может привести к порче продукта и получению травм.
• Данное изделие предназначено для внутреннего использования. Использование данного изделия на улице может привести к повреждению изделия и получению травм.

ES Lea todo el manual de instrucciones antes de comenzar la instalación y ensamblaje de la unidad. Si tiene alguna inquietud con respecto a las instrucciones o advertencias, comuníquese con su distribuidor local.
PRECAUCIÓN: Utilizar con productos de mayor peso al indicado en los límites de peso podría ocasionar inestabilidad y posibles heridas personales.
• Los usuarios deben estar ligados al soporte como se indica en las instrucciones de montaje. Una incorrecta instalación podría ocasionar daños y serias heridas personales.
• Este producto está diseñado para instalaciones en paredes de masonry sólidas, concreto sólido o bloques.
• Asegúrese de que la superficie de fijación sostenga el peso total del equipo y todos sus componentes y hardware.
• Utilice solo los tornillos de montaje suministrados y NO ajuste demasiado fuerte a los tornillos.
• Este producto está diseñado para uso en interiores solamente. Utilizar este producto en exteriores podría ocasionar fallas y heridas personales.
IMPORTANTE: Asegúrese de que haya recibido todas las piezas según la lista de verificación de componentes para la instalación. Si falta alguna de las partes, o está dañada, comuníquese con su distribuidor local para sustitución.

PT Leia todo o manual de instruções antes de iniciar a instalação e montagem. Se você tiver alguma dúvida sobre qualquer uma das instruções ou avisos, por favor, entre em contato com o seu distribuidor local para substituição.
ATENÇÃO: O uso com produtos mais pesados do que os pesos indicados pode resultar em instabilidade, causando possíveis danos.
• Os suportes devem ser anexados como especificado nas instruções de montagem. A instalação incorreta pode causar danos ou sérias lesões pessoais.
• Equipamentos de segurança e ferramentas adequadas devem ser utilizados. Este produto só deve ser instalado por profissionais.
• Certifique-se que a superfície de suporte suportará com segurança o peso combinado do equipamento e todas as ferragens e componentes anexados.
• Use os parafusos de montagem fornecidos e NÃO APERTE EXCESSIVAMENTE os mesmos.
• Este produto contém pequenas peças que podem causar asfixia se ingeridas. Mantenha essas peças longe do alcance de crianças.
• Este produto é destinado para uso em interiores somente. Utilizar este produto em exteriores pode causar falhas e ferimentos pessoais.
IMPORTANTE: Asegure-se que você recebeu todas as peças, de acordo com a lista de componentes, antes da instalação. Se alguma peça estiver faltando ou é defeituosa, contate o seu distribuidor local para substituição.
MANUTENÇÃO: Certifique-se que o suporte seja seguro e protegido para o uso em intervalos regulares (pelo menos a cada três meses).



Mount and Accessories

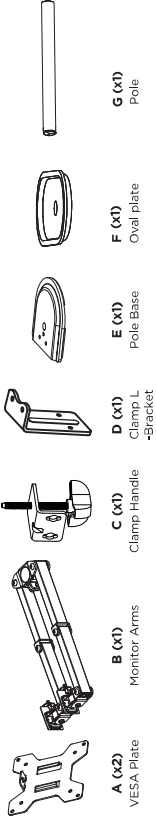


Mounting Hardware		x2
R (x1) 4mm Hex Wrench	M-A (x4) M4x12	M-B (x4) M5x12
S (x1) 6mm Hex Wrench	M-C (x4) D5	

Check carefully to make sure there are no missing or defective parts. Some hardware provided may not be used. Use the correct mounting hardware suitable for your installation.

CHOKING HAZARD. Package includes small parts. Not for children under 3 years. Adult supervision is required.

Missing Parts? Call us at (855) 925-5668 and we will ship replacement parts free of charge.

DIMENSIONS & WEIGHT CAPACITY

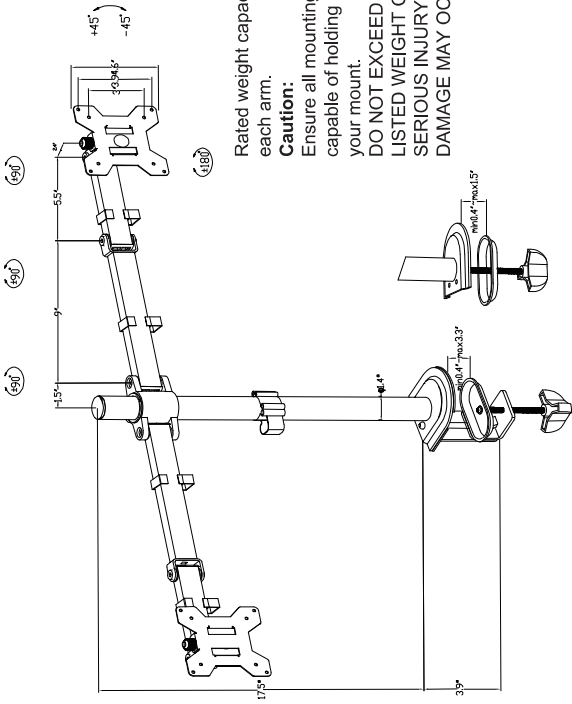


Rated weight capacity is 19.8lbs for each arm.
Caution: Ensure all mounting surfaces are capable of holding the weight of your mount.
DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY.
SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!

Step 1

Connect the Base and Pole


- Attach the Base (#E) to the Pole (#G) using the Bolt (#J) through the recessed hole in the Base shown here. Ensure the larger bolt hole in the center is aligned with the center of the pole. Tighten bolt (#J) until secure.

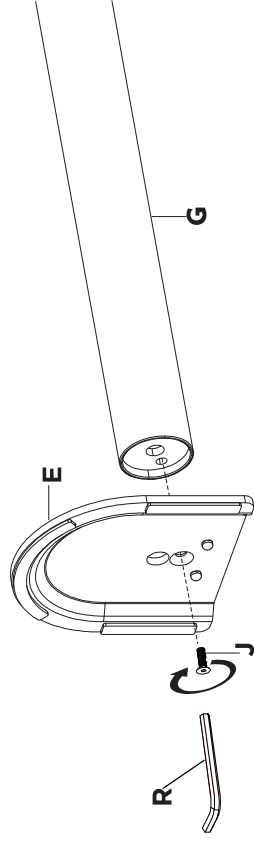

Step 2a


Clamp Mounting Option

- Install the Bolt (#L) through the remaining hole on the base. Tighten bolt (#L) until secure.

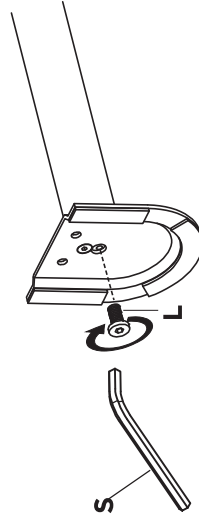


Attach the L-Bracket

- Connect the Clamp L-Bracket (#D) to the Pole Base as shown using Bolt (#K). Partially install the 2 Bolts (#K) leaving a gap of approximately 0.2in (5mm) between the bracket and the base of the screw.

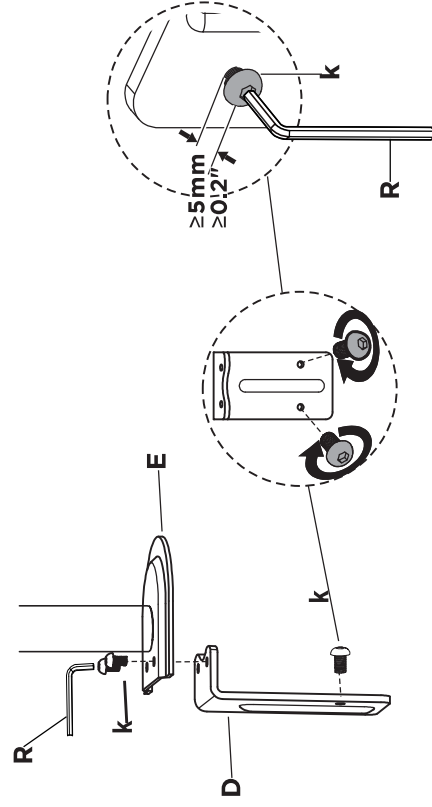


Option A: Desk Thickness 0.4"-1.8"

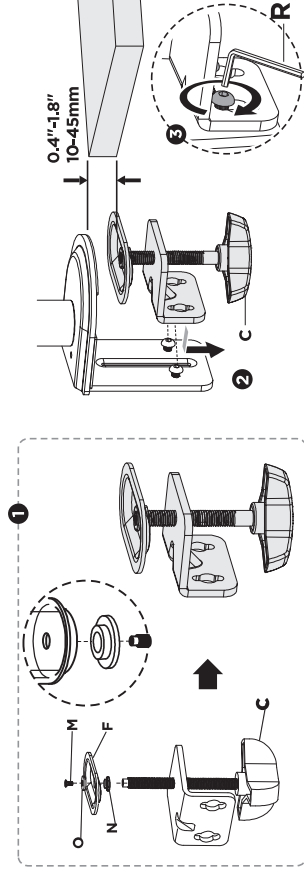


- For desks with a thickness of 0.4"-1.8" attach the Clamp Handle (#C) in the original orientation as shown so that the short end of the bracket faces down alongside the handle. Place the Lower Support Washer (#N) on the end of the clamp bolt, followed by the Oval Plate (#F) then the Upper Washer (#O) and secure it in place using the Bolt (#M).
- Place the Clamp Handle (#C) over the 2 bolts on the L-Bracket and slide it down so away from the mount so that the bolts rest in the short end of the channel. Tighten the bolts down until secure using Hex Wrench (#R).

Option B: Desk Thickness 1.8"-3.3"

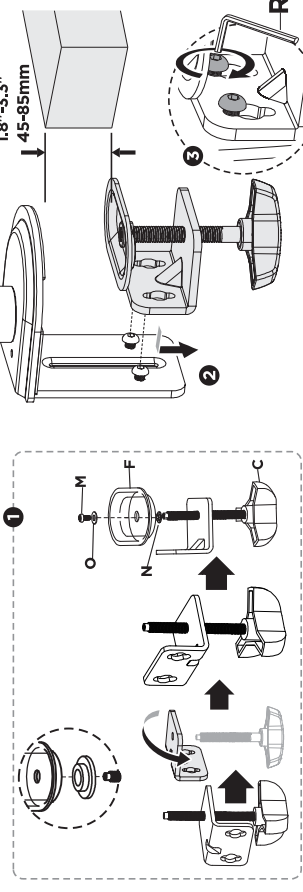

- For desks with a thickness of 1.8"-3.3" remove the hand knob from the bracket. Flip the bracket over and reinstall the hand knob in the opposite direction. The short end of the bracket will now face away from the handle. Place the Lower Support Washer (#N) on the end of the clamp bolt, followed by the Oval Plate (#F) then the Upper Washer (#O) and secure it in place using the Bolt (#M).
- Place the Clamp Handle (#C) over the 2 bolts on the L-Bracket and slide it down so away from the mount so that the bolts rest in the short end of the channel. Tighten the bolts down until secure using Hex Wrench (#R).

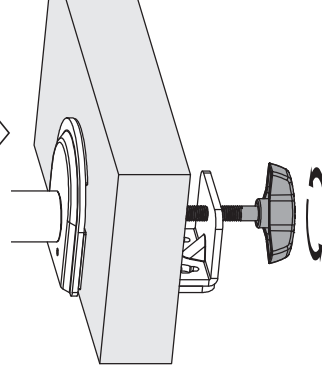


- Place the mount over the edge of the desk in the position desired and tighten the hand knob until the clamp is tight against the underside of the table.


Step 2b

Grommet Mounting Option


- To mount through a grommet hole, remove the Clamp Handle (#C), slide the Oval Plate (#F) directly over the grommet bolt as shown.

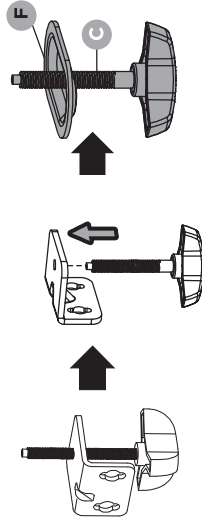

- If your desktop has an existing grommet hole between 0.4"-2.4" in diameter, with a desk thickness of 0.4"-1.6" then it is ready for installation.
- If no grommet hole exists in the desktop or not in the required location, then one will need to be drilled. Use a 3/8" (10mm) drill bit to drill a hole through your desktop. The desktop must be between 0.4"-1.6" thick.

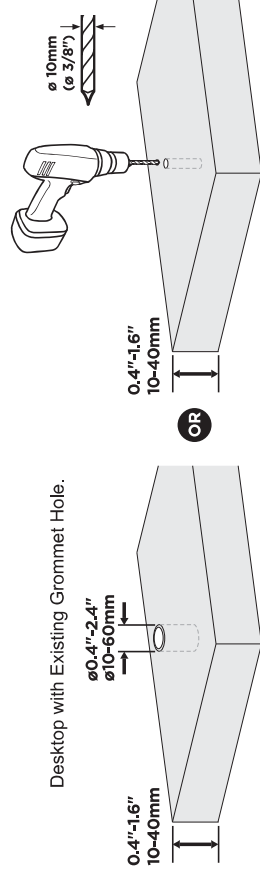


- Place the pole over the grommet hole and install the grommet handle through the underside of the desk then tighten the handle until the mount is secure.

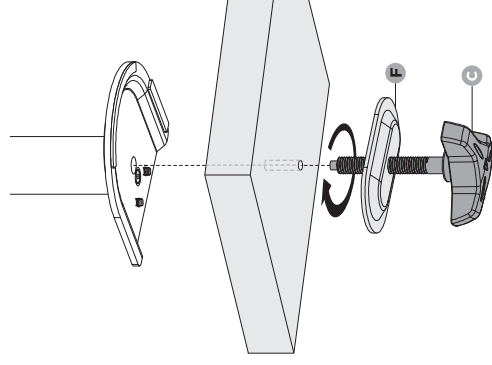


Step 3


Prepare the Monitor Arms

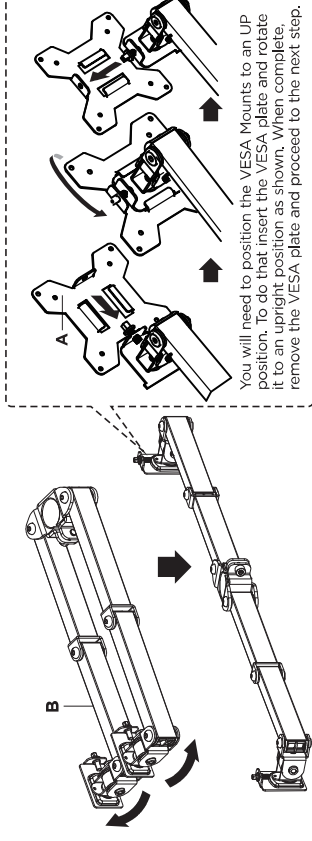

- Attach the Cable Clips (#I) to the arms then slide the Monitor Arms (#B) over the pole. Cable Clip (#H) can be attached to the vertical pole beneath the monitor arms.

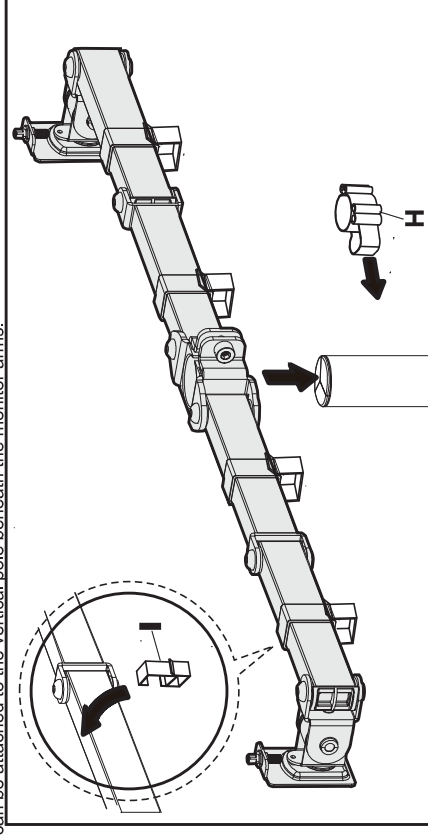


- Position the Monitor Arms at the desired height and tighten the bolt on the rear using 6mm Hex Wrench (#S) until secure.

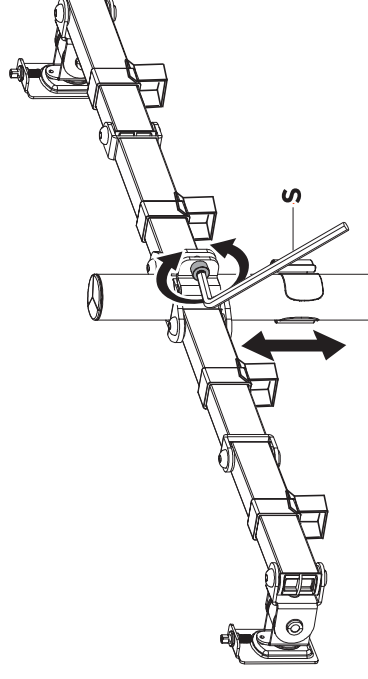

Step 4

Attach the VESA Mounts to the Monitors


- Select the appropriate size mounting bolt (Select one size #M-A, or #M-B) and washer (#M-C) for your display's mounting holes and verify the length of the VESA bolt is not too long. If you are unsure of the correct bolt size for your display, refer to your display's user manual or contact the display's manufacturer for sizing information. Attach the VESA Plates (#A) using the selected bolts and tighten until secure. Do not over tighten.

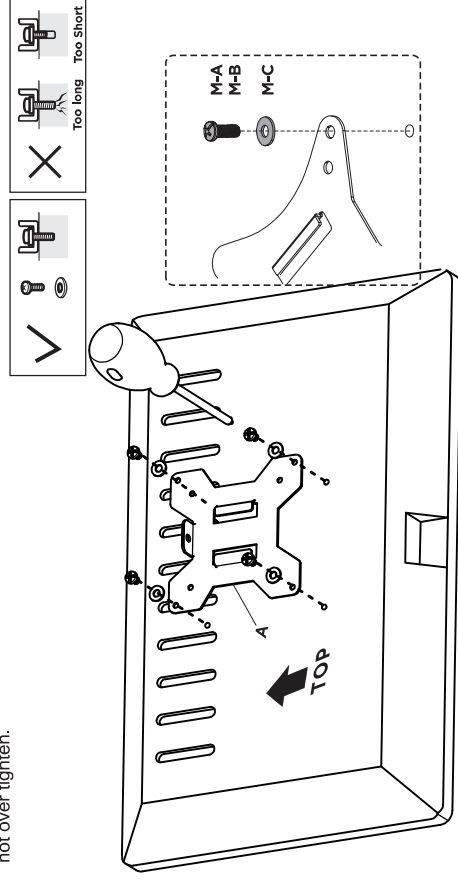

Step 5

Attach the Monitors to the Arms


- Slide the VESA plates onto the ends of the monitor arms. Hold the opposite arm when attaching the monitors to balance the mount.
- Place the Knob (#P) onto the height adjustment peg. Secure it to the peg using the Bolt. (#Q). The Knob allows minor height adjustments for each of the VESA Brackets, do not overtighten the Bolt (#Q).

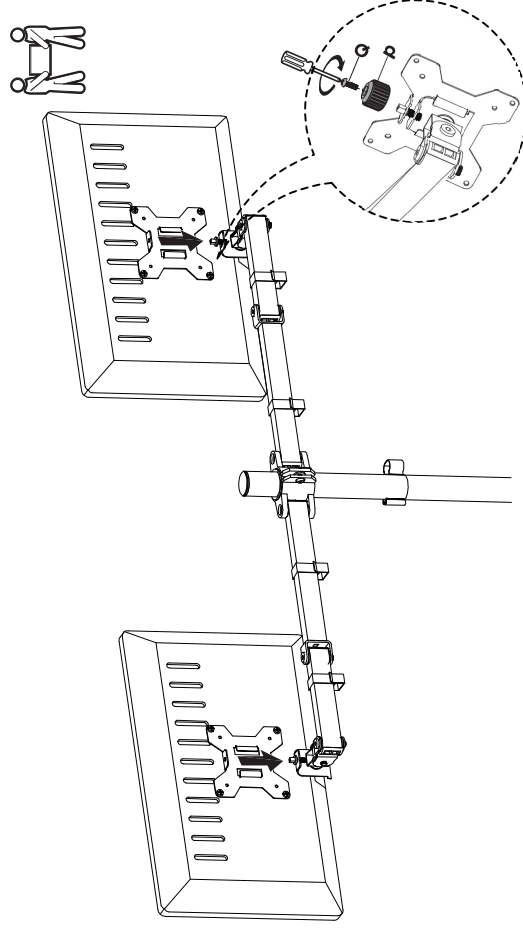

Step 6

Cable Management


- Route the cables through the cable management clips for a more organized desktop.

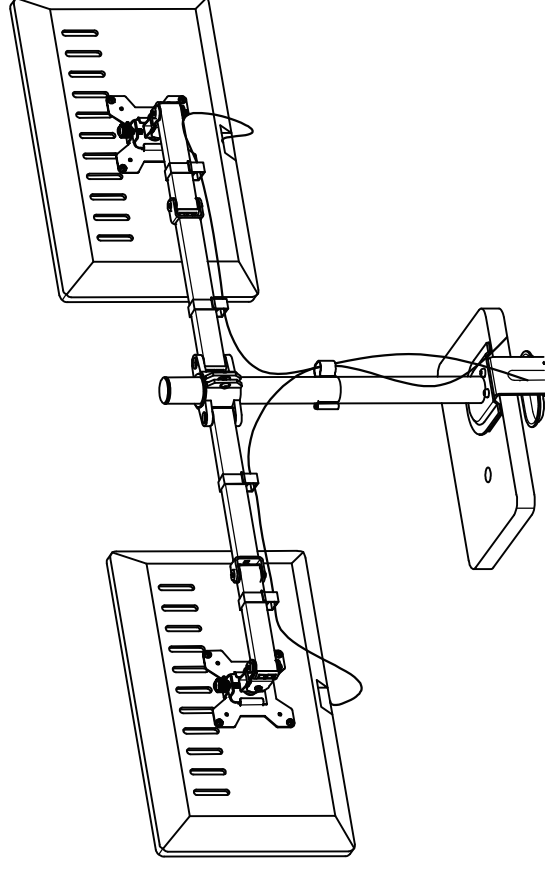

Step 7


Range of Motion

- Use within the range shown here for optimal viewing angles and stability.

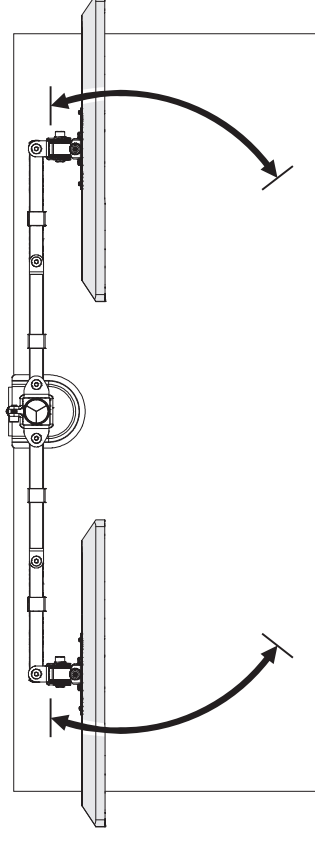


Step 8


Final Adjustments

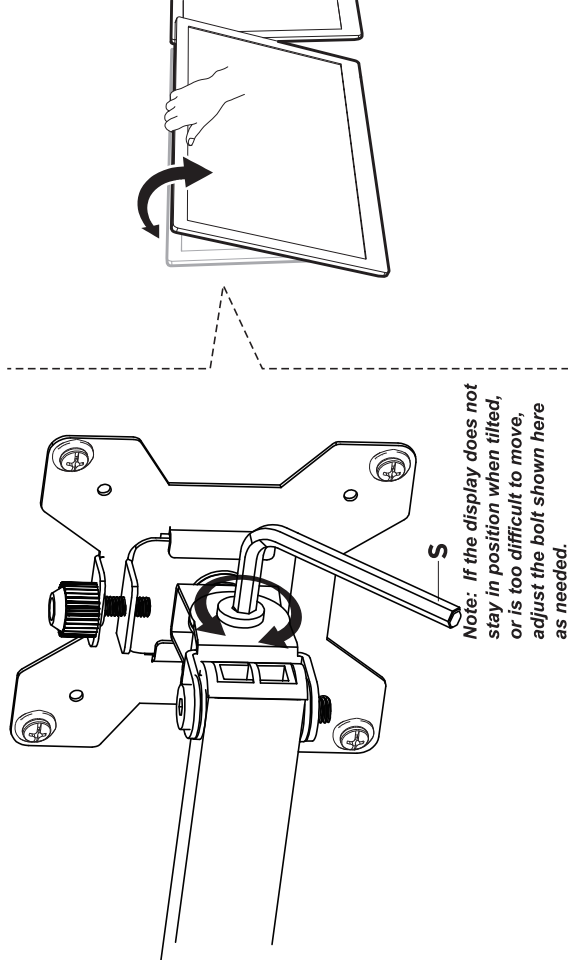

- To level the height of the monitors, rotate the Knob (#P) clockwise to lower or counterclockwise to raise. If the Knob (#P) cannot be rotated by hand to raise the monitors, lift the monitor slightly with your other hand while rotating the knob. Knob (#P) can also be adjusted with a hex wrench (not provided) if needed.

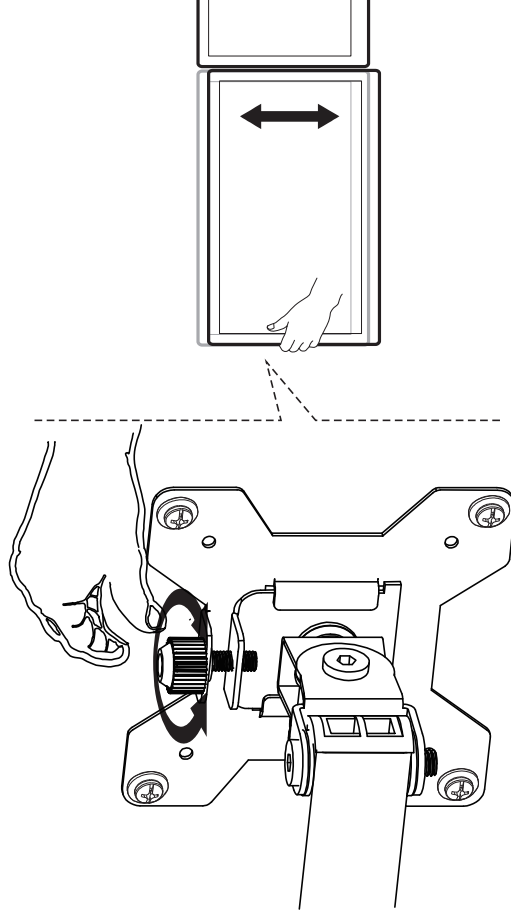

- The screens can be turned side to side and rotated to be used in portrait or landscape orientation. Store the Hex Wrenches (#R, #S) in the slots provided in Cable Clip (#I) for use when needed.

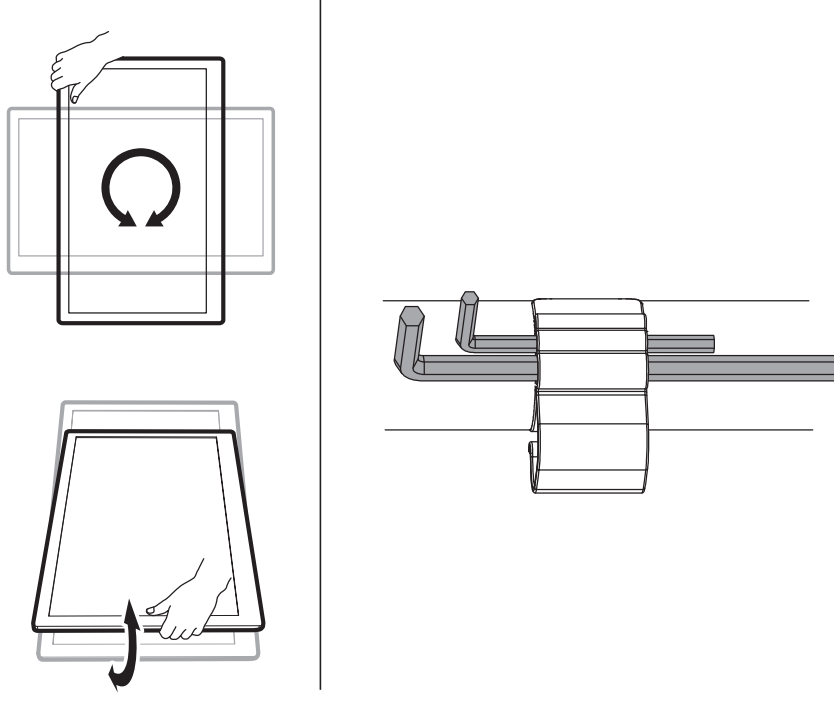

Visit us at **www.mount-it.com** for product registration and warranty information.

Our US based customer service team is standing by to answer any questions you have about your Mount-It! product.



support@mount-it.com

Available by phone **Monday - Friday from 5:00am to 5:00pm PST.**



(855) 925-5668

Chat live with an agent on our website!



www.mount-it.com